


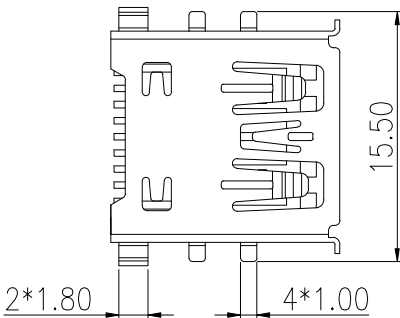
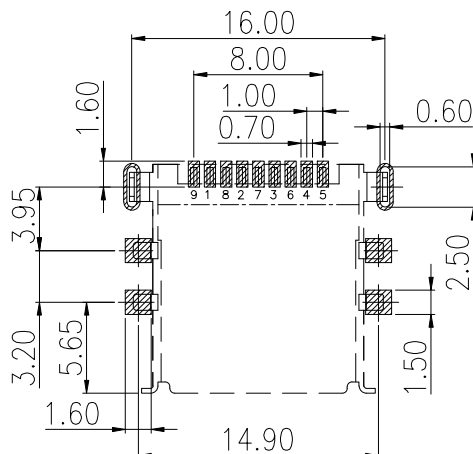
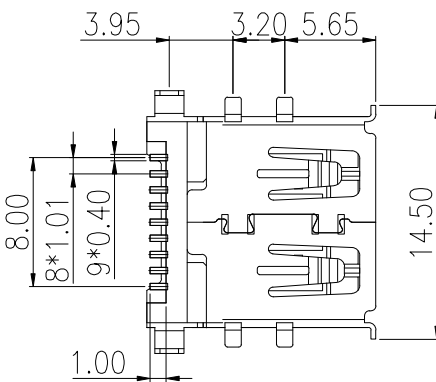
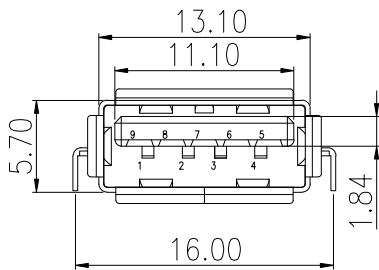


RoHS 2.0

PIN NUMBER	SIGNAL NAME
PIN 1	Vbus
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	StdA_SSRX-
PIN 6	StdA_SSRX+
PIN 7	GND_DRAIN
PIN 8	StdA_SSTX-
PIN 9	StdA_SSTX+
SHELL	GND

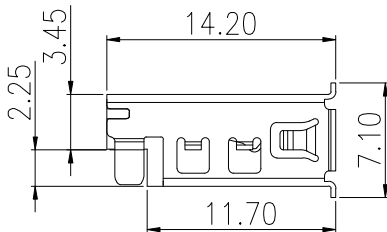

3D VIEW



RECOMMEND PCB LAYOUT(±0.05)

REV.	ECN	NO.	DESCRIPTION	DATE	DESIGN

- NOTES:
- MATERIAL:
 - HOUSING: LCP ,COLOR IS BLUE,HIGH TEMPERATURE PLASTIC;
 - CONTACT: BRASS (H65 T=0.20mm);
 - SHELL: COLD ROLLED IRON (SPCC T=0.30mm);
 - ELECTRICAL:
 - VOLTAGE RATING: 30V DC ;
 - CURRENT RATING: 1.5A ;
 - CONTACT RESISTANCE: 30MILLIOHMS MAX.;
 - WITHSTAND VOLTAGE: 100V AC RMS 50(60)Hz,1MIN.;
 - INSULATION RESISTANCE: 100MEGOHMS MIN @500V DC;
 - MECHANICAL:
 - MATING FORCE: 35N MAX.;
 - UNMATING FORCE: 5~35N ;
 - OPERATING LIFE: 1500 CYCLES MIN.;
 - PLATING:
 - TERMINAL:
NI PLATING OVER ALL,
Tin PLATING ON SOLDER AREA,
Au G/Fu" ON CONTACT AREA;
 - SHELL: NI PLATING OVER ALL;
 - ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: -40°C~+85°C;
 - OPERATION TEMPERATURE RANGE: -25°C~+70°C;
 - SALT SPRAY TEST:24H(EXCLUDING RIVETED BENDS)

C	外壳	SPCC	镀镍	
B	端子	黄铜H65	焊料区镀锡 接触区镀金G/ F	
A	基座	LCP	蓝色	
序号	品 名	材 质	电镀/ 颜色	备 注

深圳市富港科技有限公司

UNLESS GENERAL	OTHERWISE, TOLERANCE:	NAME:			P/N:		
		3.0 A母沉板直脚卷边B款			DWG NO.: FG-ST-003-L14.2CB-J		
X.xxx	±0.10	THIRD ANGLE PROJECTION 	UNIT:	SCALE	SIZE:	SHEET:	REV.:
X.xx	±0.20		mm	1:1	A4	1/1	A1
X.x	±0.30						
ANGULAR:		DRAWN:		CHECKED:		APPROVED	
X.xx°	±1°	Q S X					
X.x°	±3°						
X.°	±5°						