

1

2

3



4

A

B

C

D

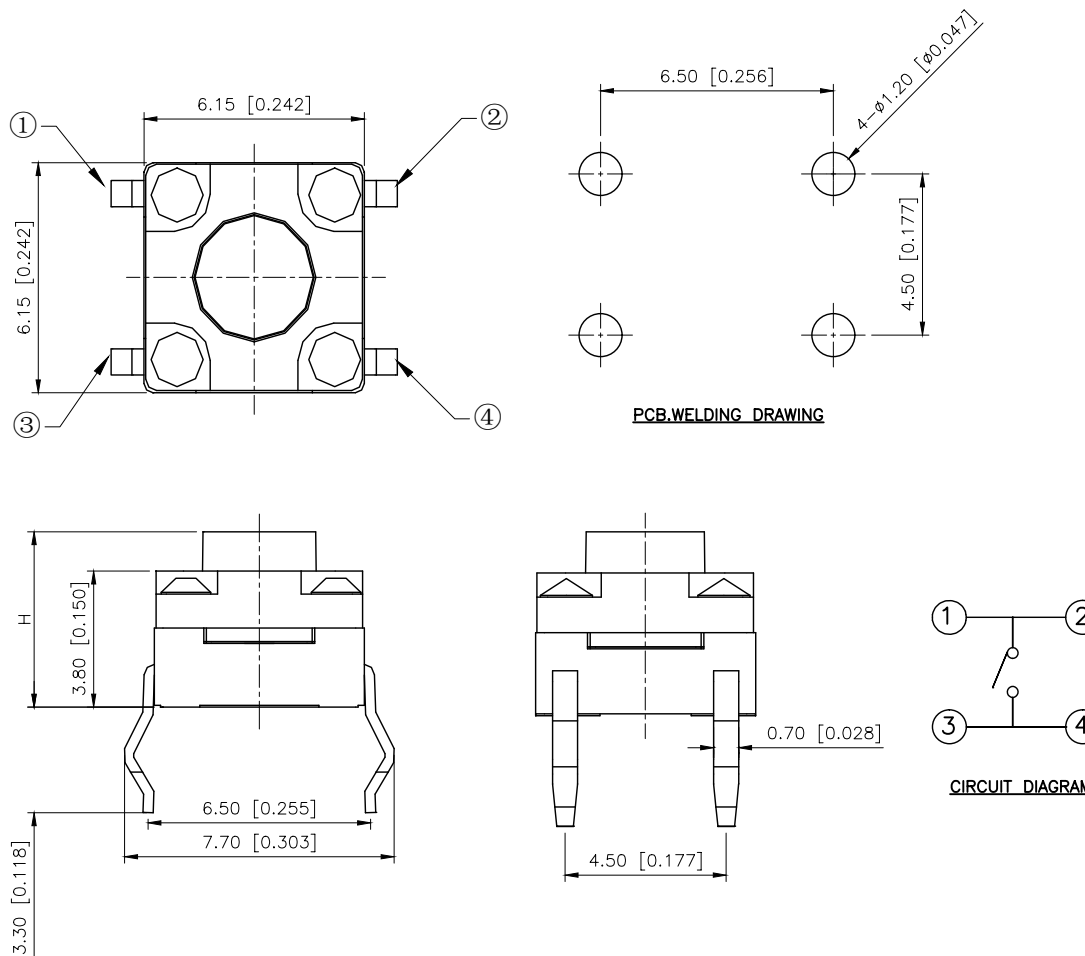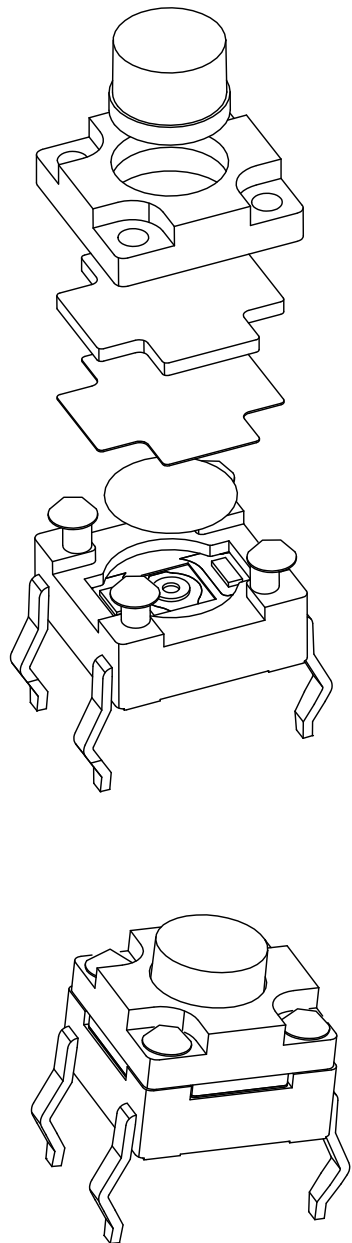

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.26	阿树

Code-x	H
A	4.30
B	4.50
C	5.00
D	5.50
E	6.00
F	6.50
G	7.00
H	7.50
I	8.00
J	8.50
K	9.00

SPECIFICATION

Contact Rating: 50mA,12V DC
Contact Resistance: 100m Ω max
Insulation Resistance: 100M Ω min.500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.30mm
Operating Temp: -25 $^{\circ}$ C~+80 $^{\circ}$ C
Storage Temp: -30 $^{\circ}$ C~+80 $^{\circ}$ C

PAPT NO	TC-FS66D-C-Q
Operating Force	A:100gf B:160gf C:260gf
Height	Code-X

⑤	Terminal	4	Brass (0.30t)	Plating silvering
④	Contact	1	F.ag/SUS	Natural
③	Base	1	PPA	
②	Cover	1	PPA	
①	Keystake	1	PPA	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE: TACT SWITCH		
PART NO.: TC-FS66D-C-Q		
DWG NO.: TC-FS66D-C-Q		
SCALE	PAGE	REVISION
N/A	1/2	A1

1

2

3

4

A

B

C

D

