


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.03	阿树

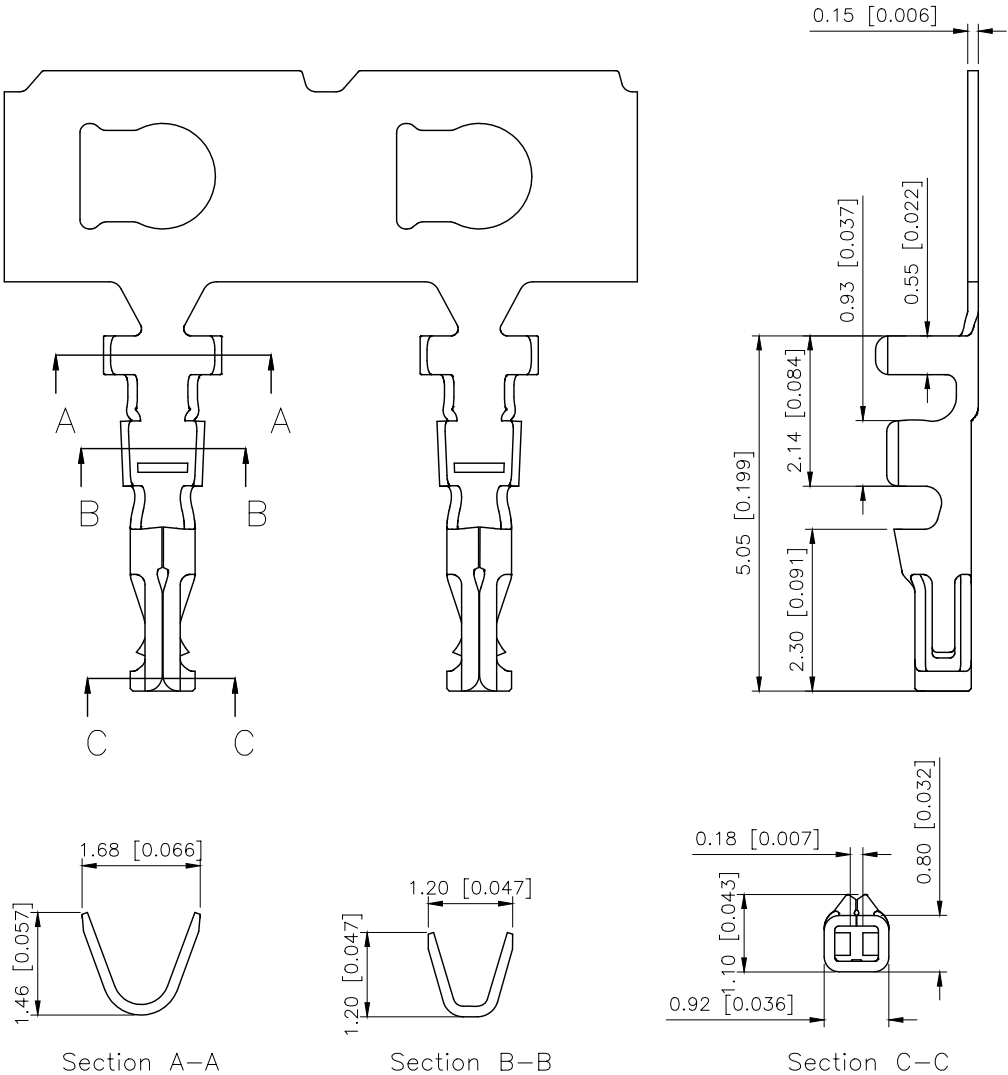

- SPECIFICATIONS
- Voltage rating:150V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥500MΩ
 - Contact resistance:≤30mΩ

PART NO.:

X9862 T-P SN
① ② ③ ④

- ①Series No
②Category:T-Terminal
③Material:P-Phosphor bronze
④Plating style:V01-Gold Flash;
SN-Bright tin plating

X9862T-PV01	PHOSPHOR BRONZE	AWG#28-32 O.D:0.9mm (Max)	Gold Flash	X9862H
X9862T-PSN			Tin	
PART NO	Material	Wire Range	Plating	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:
CHECKED		UNIT: mm/in
APPROVED		SIZE: A4

MODEL TYPE: 1.25mm Crimp Style Connectors
PART NO.: X9862T-PSN
DWG NO.: X-X9862T-PSN

SCALE	PAGE	REVISION
N/A	1/1	A1