


Applications


- Adaptor
- TV Main Power
- SMPS Power Supply
- LCD Panel Power

General Features


- Proprietary New Planar Technology
 $R_{DS(ON),typ.}=0.36\ \Omega @ V_{GS}=10V$
- Low Gate Charge Minimize Switching Loss
- Fast Recovery Body Diode



TO-220F

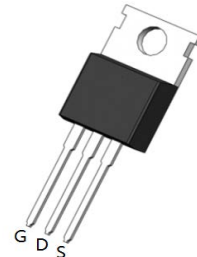

TO-220



Schematic Diagram

Package Marking and Ordering Information

Device Marking	Device	Package	TUBE (pcs)	Inner Box (pcs)	Per Carton (pcs)
20N65	SWC20N65	TO-220	50	1000	5000
20N65	SWF20N65	TO-220F	50	1000	5000

Absolute Maximum Ratings

$T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	SWC20N65	SWF20N65	Unit
V_{DSS}	Drain-to-Source Voltage ^[1]	650		V
V_{GSS}	Gate-to-Source Voltage	± 30		
I_D	Continuous Drain Current	20		A
$I_D @ T_C=100^{\circ}\text{C}$	Continuous Drain Current @ $T_C=100^{\circ}\text{C}$	Figure 3		
I_{DM}	Pulsed Drain Current at $V_{GS}=10V$ ^[2]	Figure 6		
E_{AS}	Single Pulse Avalanche Energy	550		mJ
dv/dt	Peak Diode Recovery dv/dt ^[3]	5.0		V/ns
P_D	Power Dissipation	160	65	W
	Derating Factor above 25°C	1.28	0.52	W/ $^{\circ}\text{C}$
T_L T_{PAK}	Maximum Temperature for Soldering Leads at 0.063in (1.6mm) from Case for 10 seconds, Package Body for 10 seconds	300 260		$^{\circ}\text{C}$
$T_J \& T_{STG}$	Operating and Storage Temperature Range	-55 to 150		

Caution: Stresses greater than those listed in the "Absolute Maximum Ratings" may cause permanent damage to the device.

Thermal Characteristics

Symbol	Parameter	SWC20N65	SWF20N65	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	0.78	1.92	$^{\circ}\text{C/W}$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	62	100	



Electrical Characteristics

OFF Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	650	--	--	V	$V_{GS}=0V, I_D=250\mu A$
I_{DSS}	Drain-to-Source Leakage Current	--	--	1	μA	$V_{DS}=650V, V_{GS}=0V$
		--	--	100		$V_{DS}=520V, V_{GS}=0V, T_J=125^\circ\text{C}$
I_{GSS}	Gate-to-Source Leakage Current	--	--	+100	nA	$V_{GS}=+30V, V_{DS}=0V$
		--	--	-100		$V_{GS}=-30V, V_{DS}=0V$

ON Characteristics

$T_J = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$R_{DS(ON)}$	Static Drain-to-Source On-Resistance ^[4]	--	0.36	0.50	Ω	$V_{GS}=10V, I_D=10A$
$V_{GS(TH)}$	Gate Threshold Voltage	2.0	--	4.0	V	$V_{DS}=V_{GS}, I_D=250\mu A$
gfs	Forward Transconductance ^[4]	--	15	--	S	$V_{DS}=15V, I_D=10A$

Dynamic Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
C_{iss}	Input Capacitance	--	2400	--	pF	$V_{GS}=0V, V_{DS}=25V, f=1.0MHz$
C_{rss}	Reverse Transfer Capacitance	--	105	--		
C_{oss}	Output Capacitance	--	225	--		
Q_g	Total Gate Charge	--	65	--	nC	$V_{DD}=325V, I_D=20A, V_{GS}=0 \text{ to } 10V$
Q_{gs}	Gate-to-Source Charge	--	11	--		
Q_{gd}	Gate-to-Drain (Miller) Charge	--	26	--		

Resistive Switching Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$t_d(ON)$	Turn-on Delay Time	--	35	--	nS	$V_{DD}=325V, I_D=20A, V_{GS}=10V, R_G=25\Omega$
t_{rise}	Rise Time	--	82	--		
$t_d(OFF)$	Turn-Off Delay Time	--	180	--		
t_{fall}	Fall Time	--	90	--		



SWC20N65 SWF20N65 650V N-Channel MOSFET

Source-Drain Body Diode Characteristics

$T_J=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Min	Typ.	Max.	Unit	Test Conditions
I_{SD}	Continuous Source Current ^[4]	--	--	20	A	Integral PN-diode in MOSFET
I_{SM}	Pulsed Source Current ^[4]	--	--	80		
V_{SD}	Diode Forward Voltage	--	--	1.5	V	$I_S=20\text{A}$, $V_{GS}=0\text{V}$
t_{rr}	Reverse recovery time	--	390	--	ns	$V_{GS}=0\text{V}$, $I_F=20\text{A}$, $di_F/dt=100\text{A}/\mu\text{s}$
Q_{rr}	Reverse recovery charge	--	3.4	--	uC	

Note:

[1] $T_J=+25^{\circ}\text{C}$ to $+150^{\circ}\text{C}$

[2] Repetitive rating; pulse width limited by maximum junction temperature.

[3] $I_{SD}=20\text{A}$ $di/dt < 100\text{A}/\mu\text{s}$, $V_{DD} < BV_{DSS}$, $T_J=+150^{\circ}\text{C}$.

[4] Pulse width $\leq 380\mu\text{s}$; duty cycle $\leq 2\%$.

Typical Characteristics

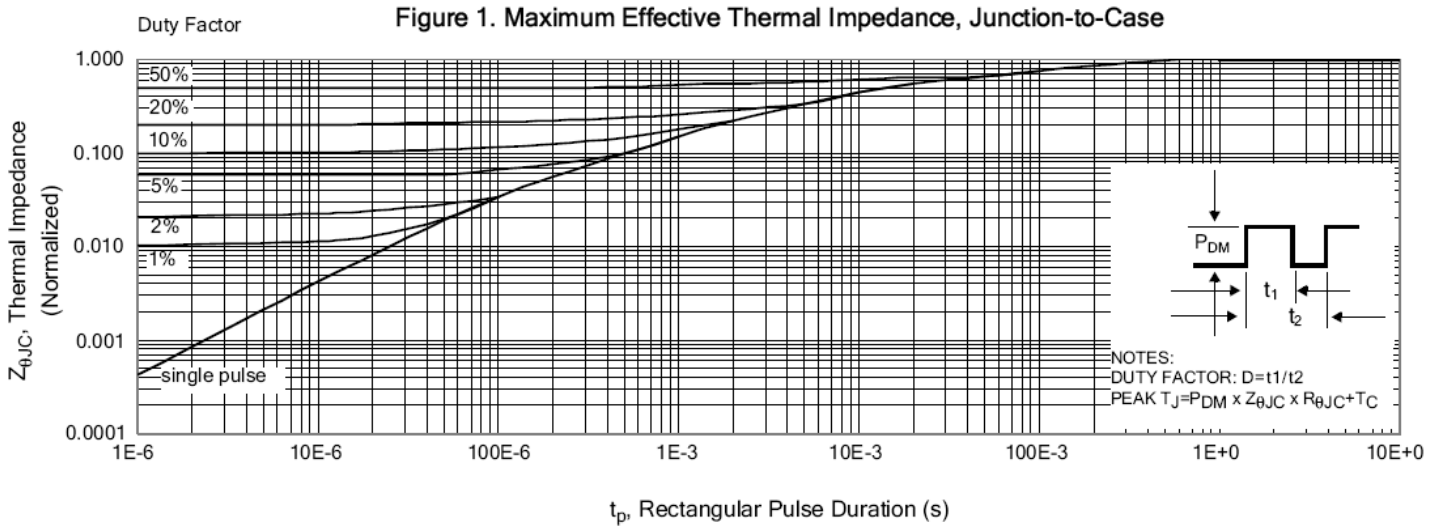


Figure 2. Maximum Power Dissipation vs Case Temperature

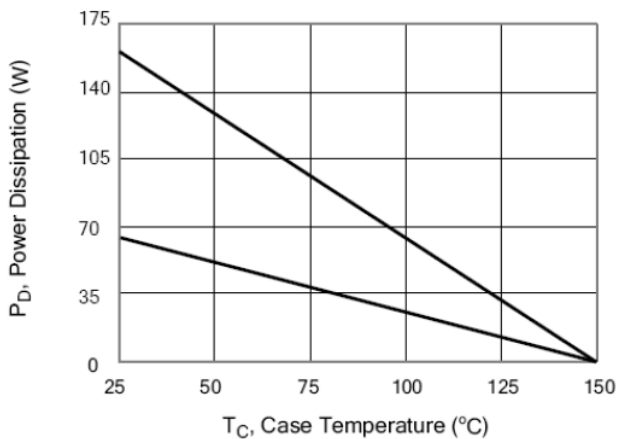


Figure 3. Maximum Continuous Drain Current vs Case Temperature

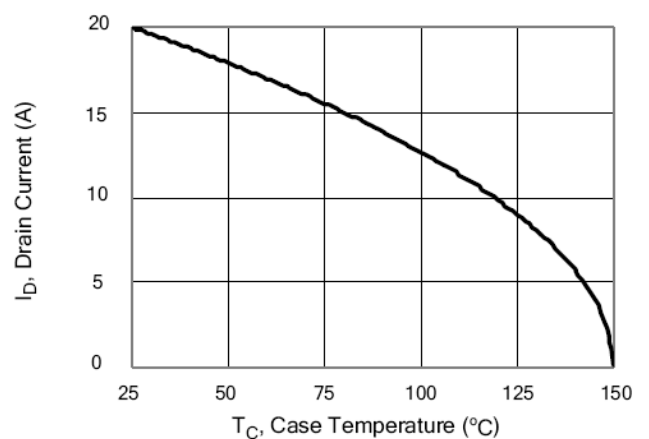


Figure 4. Typical Output Characteristics


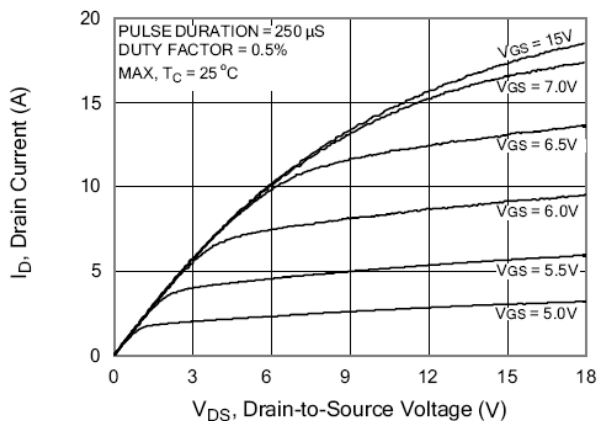


Figure 5. Typical Drain-to-Source ON Resistance vs Gate Voltage and Drain Current

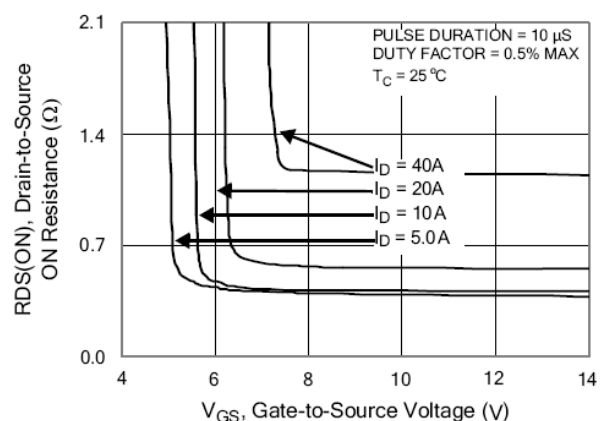

Typical Characteristics(Cont.)

Figure 6. Maximum Peak Current Capability

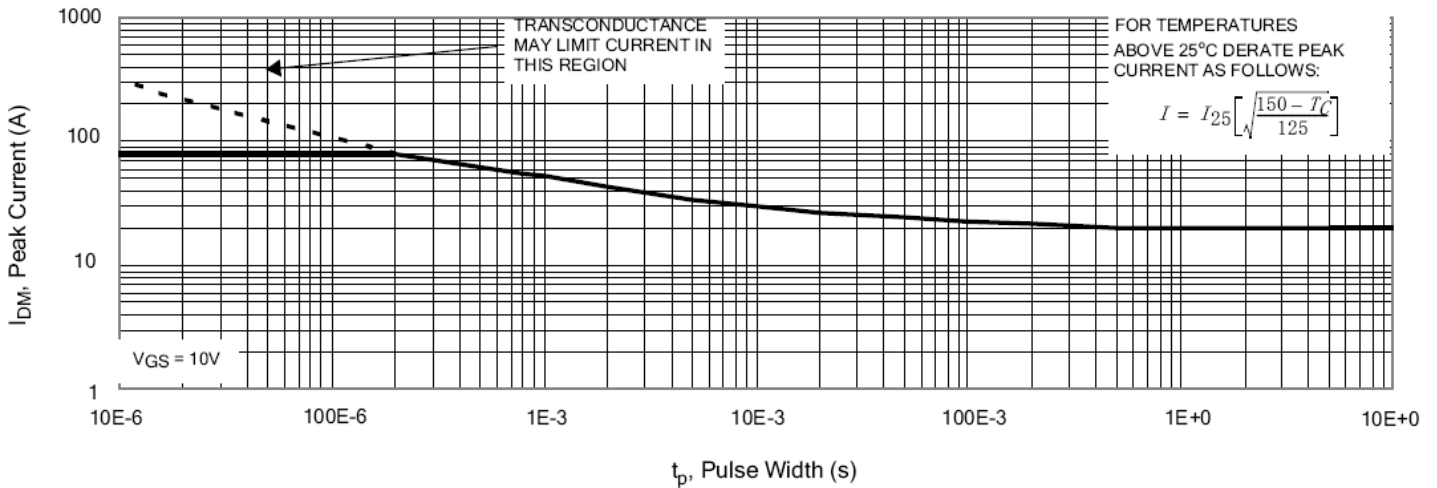


Figure 7. Typical Transfer Characteristics

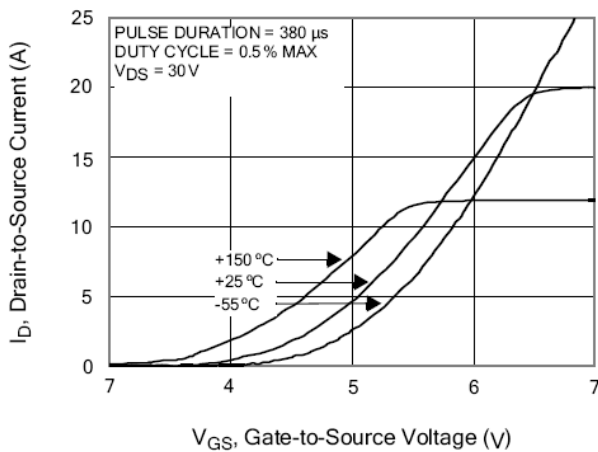


Figure 8. Unclamped Inductive Switching Capability

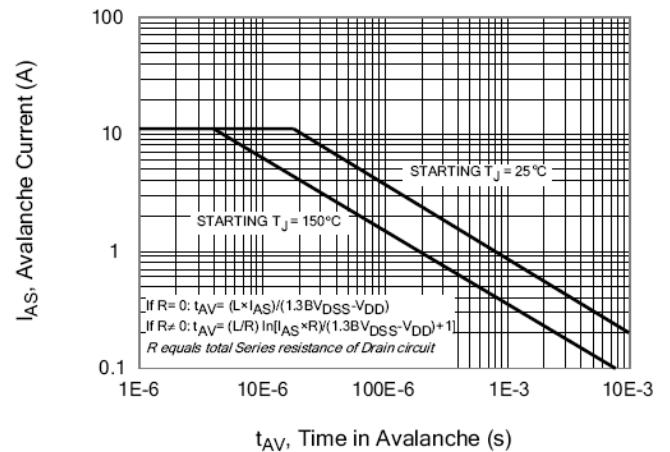


Figure 9. Typical Drain-to-Source ON Resistance vs Drain Current


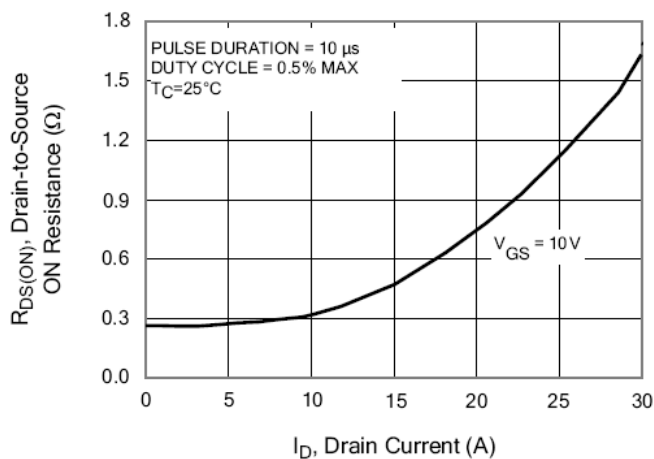


Figure 10. Typical Drain-to-Source ON Resistance vs Junction Temperature

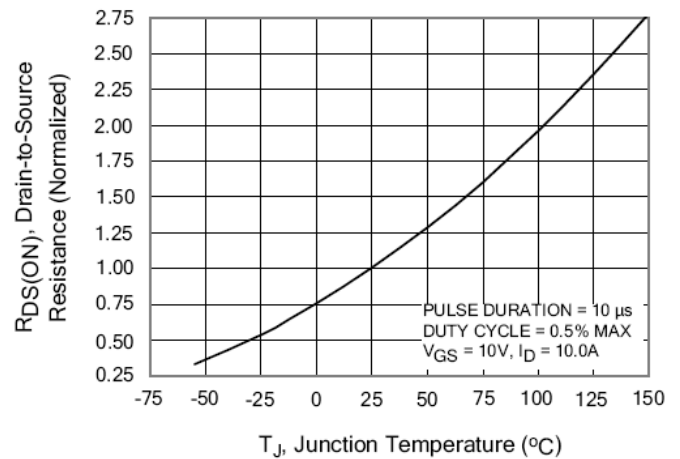

Typical Characteristics(Cont.)

Figure 11. Typical Breakdown Voltage vs Junction Temperature

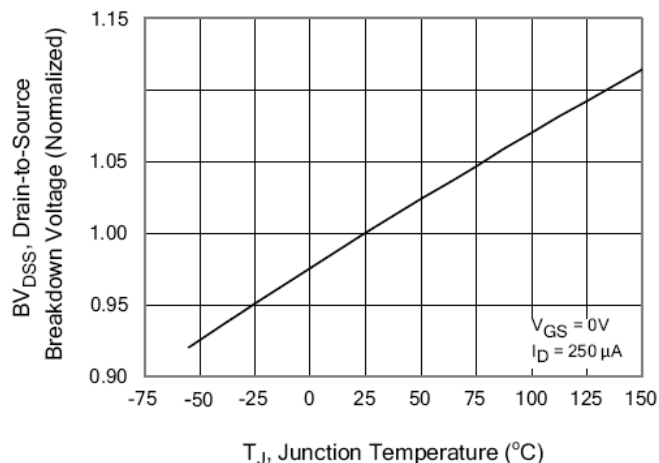


Figure 12. Typical Threshold Voltage vs Junction Temperature

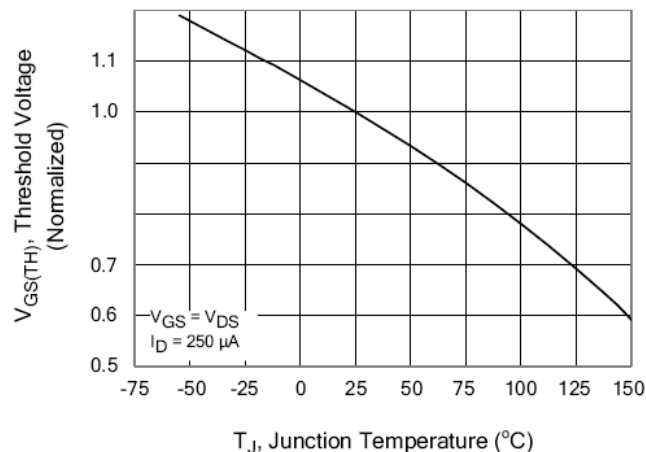


Figure 13. Maximum Forward Bias Safe Operating Area

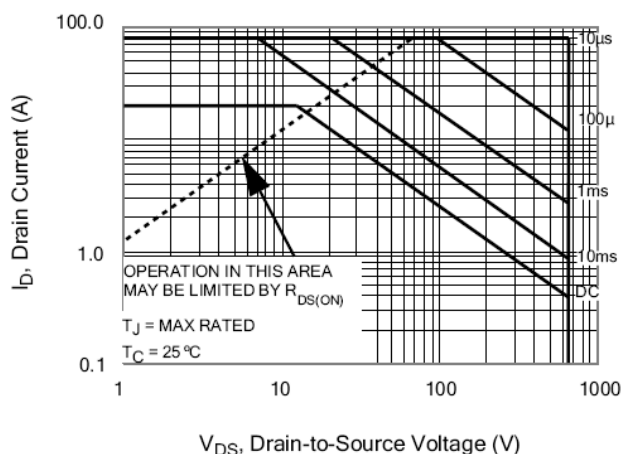


Figure 14. Typical Capacitance vs Drain-to-Source Voltage

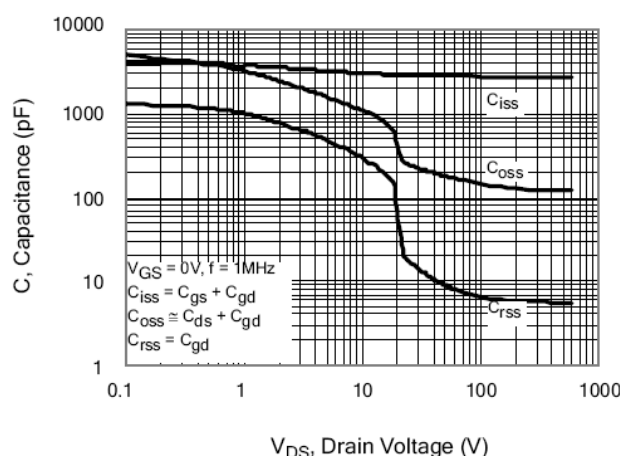


Figure 15. Typical Gate Charge vs Gate-to-Source Voltage


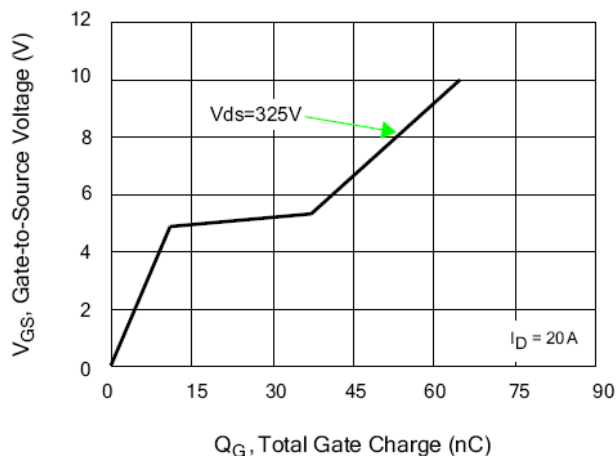


Figure 16. Typical Body Diode Transfer Characteristics

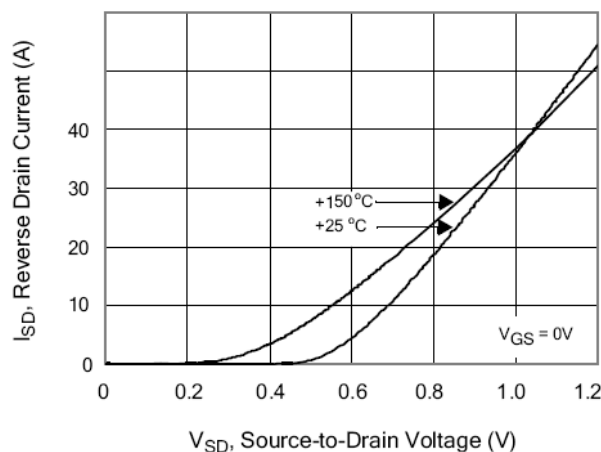

Test Circuits and Waveforms

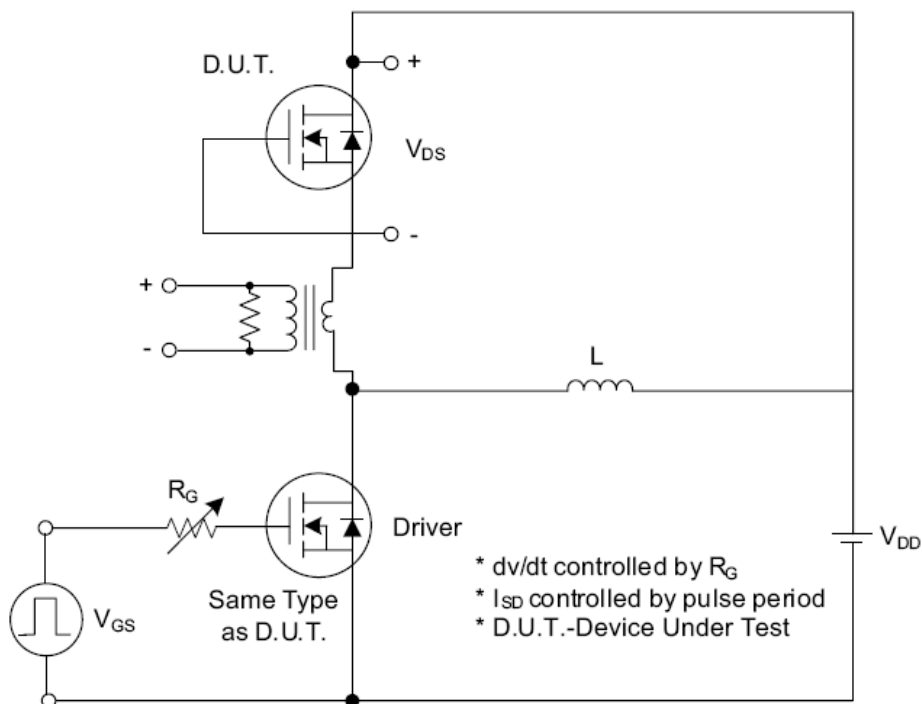


Fig. 1.1 Peak Diode Recovery dv/dt Test Circuit

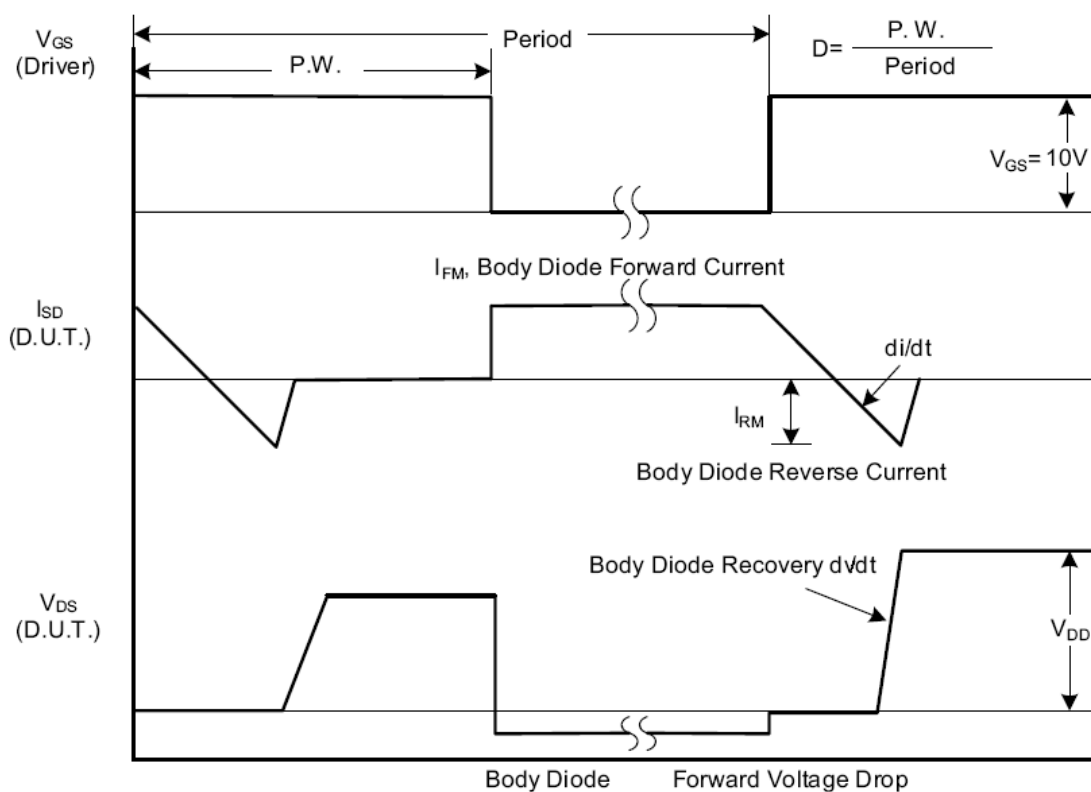


Fig. 1.2 Peak Diode Recovery dv/dt Waveforms

Test Circuits and Waveforms (Cont.)

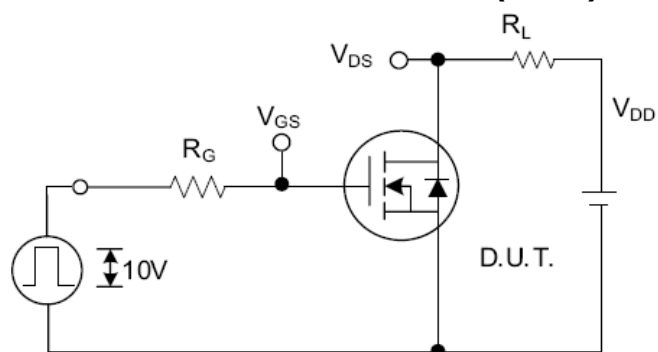


Fig. 2.1 Switching Test Circuit

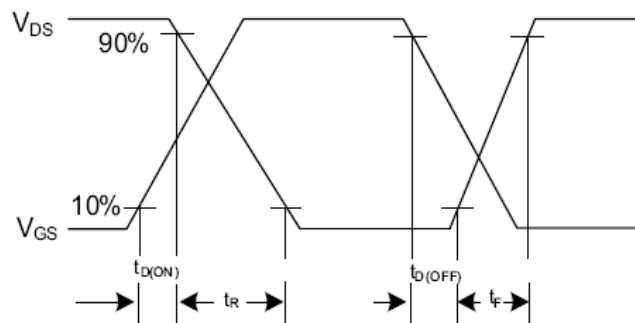


Fig. 2.2 Switching Waveforms

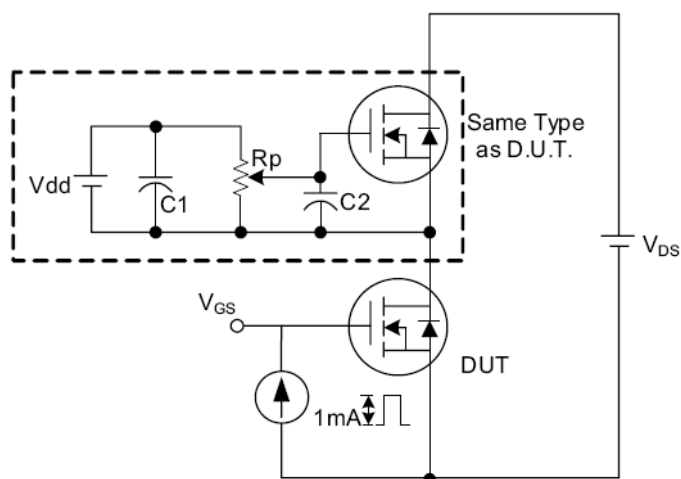


Fig. 3.1 Gate Charge Test Circuit

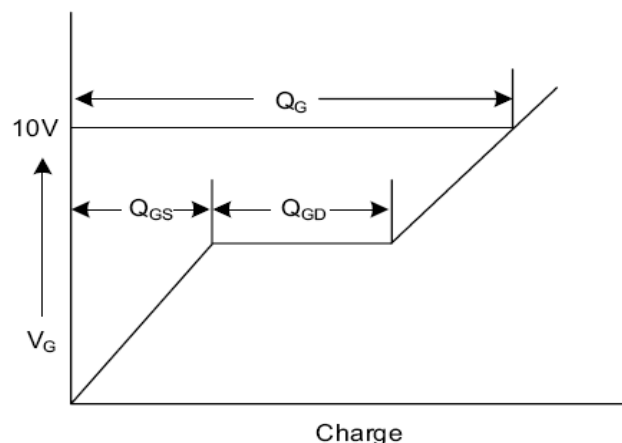


Fig. 3.2 Gate Charge Waveform

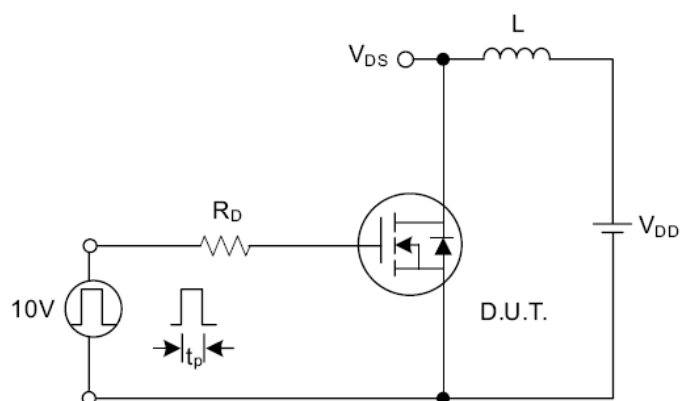


Fig. 4.1 Unclamped Inductive Switching Test Circuit


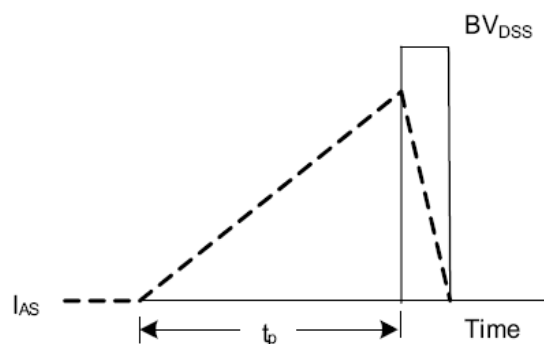



Fig. 4.2 Unclamped Inductive Switching Waveforms

Package Dimension TO-220

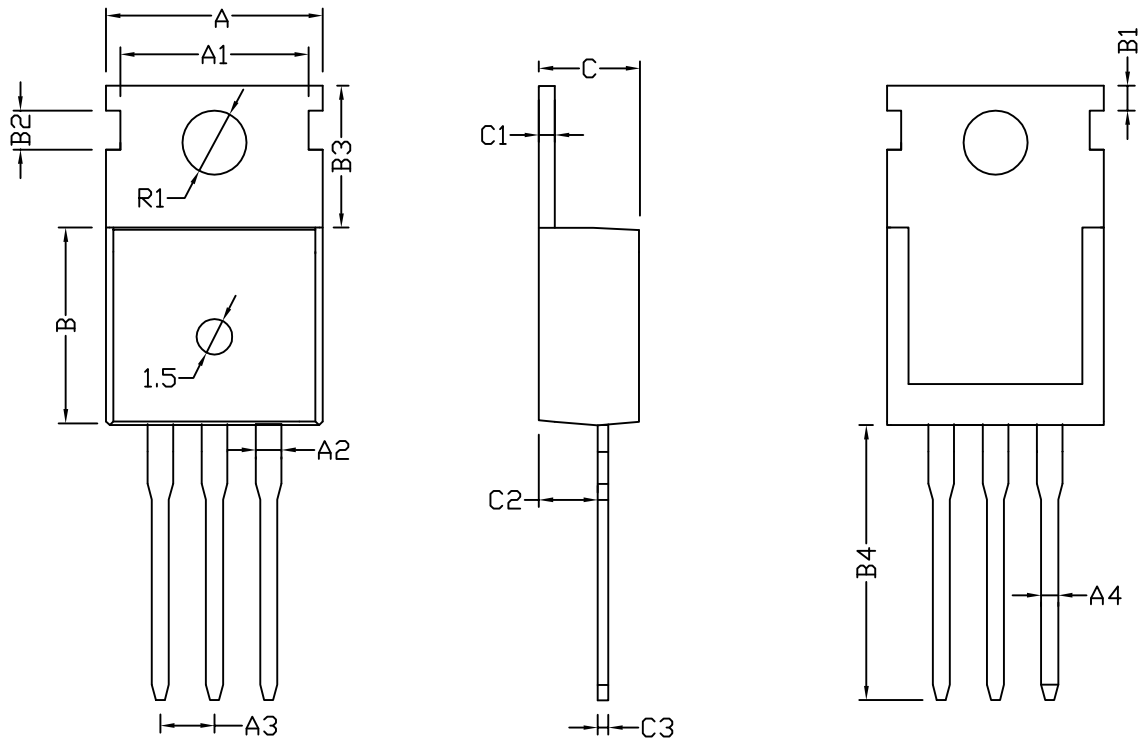

标注	最小	标准	最大	标注	最小	标准	最大	标注	最小	标准	最大
A	9.78	9.88	9.98	B	8.7	9.2	9.7	C	4.42	4.5	4.58
A1	8.65	8.70	8.75	B1	1.25	1.30	1.35	C1	1.27	1.3	1.33
A2	1.22	1.27	1.35	B2	1.65	1.70	1.75	C2	2.37	2.4	2.43
A3	2.5	2.54	2.59	B3	6.5	6.6	6.7	C3	0.48	0.5	0.52
A4	0.77	0.80	0.83	B4	12.90	13.08	13.18	R	3.60	3.65	3.70

Package Dimension TO-220F

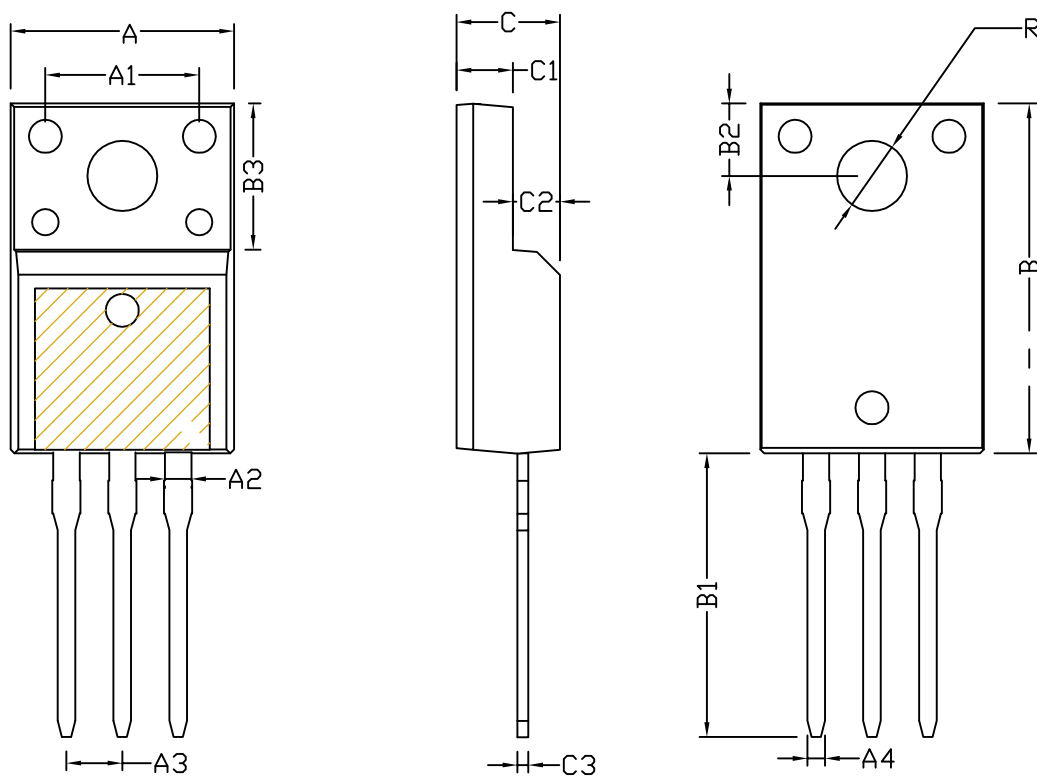

标注	最小	标准	最大	标注	最小	标准	最大	标注	最小	标准	最大
A	10.03	10.13	10.23	B	15.81	15.91	16.01	C	4.62	4.7	4.78
A1	6.5	7.0	7.5	B1	12.79	12.89	12.99	C1	2.5	2.55	2.6
A2	1.20	1.28	1.36	B2	3.0	3.3	3.6	C2	2.1	2.15	2.2
A3		2.54		B3	6.6	6.65	6.7	C3		0.5	
A4	0.7	0.8	0.9	R		3.18					