
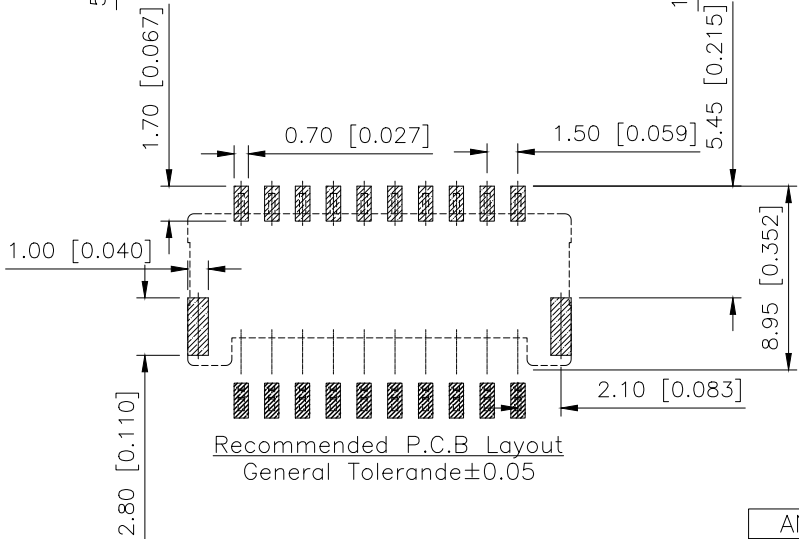
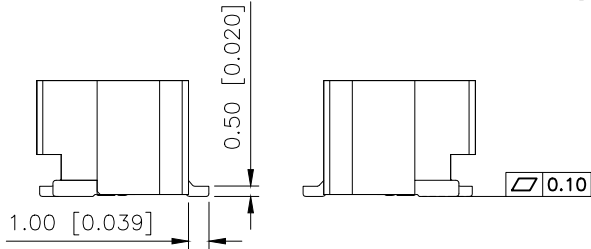
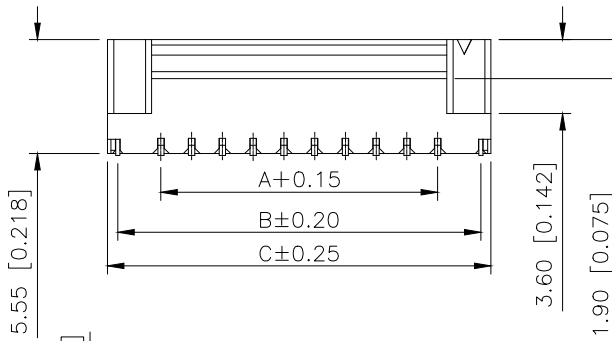


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		INITIAL RELEASE	2024.07.13	阿 树

■SPECIFICATIONS

- Voltage rating:100V AC,DC
- Current rating:2.0A,AC,DC
- Withstanding Voltage:500V AC/minute
- Insulation resistance:500MΩ min
- Temperature range:−45°C+95°C
- Contact resistance:40mΩ max

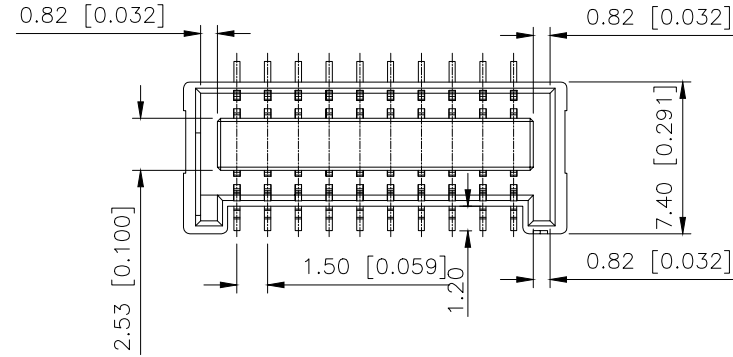

PART NO.:

X1501 W V S-2xXX-LP SN
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category:W-Wafer
- ③ Welding Board Angle:V-Straight 180°
- ④ Welding Way:S-SMT
- ⑤ Row No-Pin: XX-05P~20P
- ⑥ Material:LP-LCP UL94V-0(Gray)
- ⑦ Plating: SN-Plated Tin

Poles	Dimension mn		
	A	B	C
2x05	6.00	10.20	11.20
2x06	7.50	11.70	12.70
2x07	9.00	13.20	14.20
2x08	10.5	14.70	15.70
2x09	12.0	16.20	17.20
2x10	13.5	17.70	18.70
2x11	15.0	19.20	20.20
2x12	16.5	20.70	21.70
2x13	18.0	22.20	23.20
2x14	19.5	23.70	24.70
2x15	21.0	25.20	26.20
2x16	22.5	26.70	27.70
2x17	24.0	28.20	29.20
2x18	25.5	29.70	30.70
2x19	27.0	31.20	32.20
2x20	28.5	32.70	33.70

X1501WVS-2xXX-LPXX	LCP	Brass	X1501H
PART NO	Material	Material (pin)	Suitable XKB Housing

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

XKB

DESIGN	阿 树	VIEW:
CHECKED		UNIT: mm/in
APPROVED		SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

MODEL TYPE: 1.5mm Crimp Style Connector		
PART NO.: X1501WVS-2xXX-LPSN		
DWG NO.:		
SCALE N/A	PAGE 1/1	REVISION A1