

Pitch:2.00x2.00mm(0.079 " x0.079 " ) (Four-point Contacts)  
Female Header Dual Rows Straight Type

**ELETE**  
—Professional Connecting Solution—  
**HFLDS35 Series**


### Specifications

Current Rating:2.0 Ampere  
Insulation Resistance:1000MΩ Min  
Dielectric Withstanding:500V AC  
Contact Resistance:20mΩ Max  
Operating Temperature:-40℃ to +105℃


### Materials

Contact Material: Phosphor Bronze  
Insulation Material: Polyester,UL 94V-0  
LCP/NL6T


All material RoHS&Reach Compliant  
Halogen-free is available

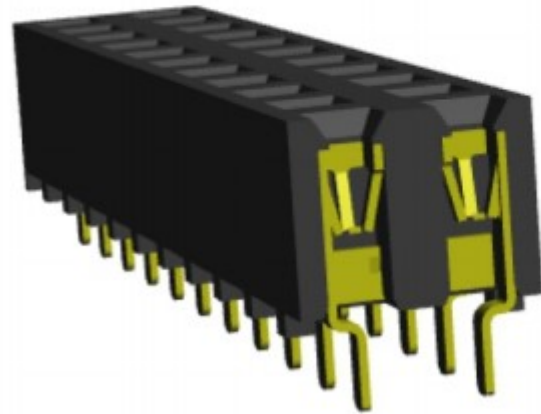


Mating with




HMLDSXX



HMLDSHXX








HMLDMHXX




HMLDR43




HMLDP20

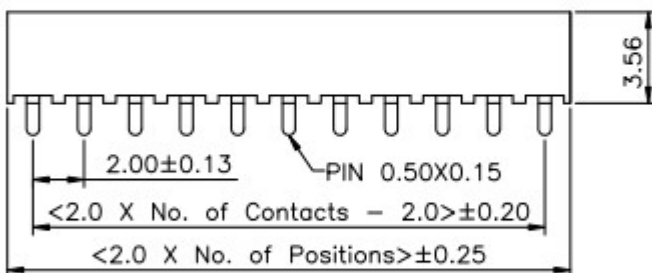

HMLDMXX



HMLDS43



HMLDRXX



HMLDP20