



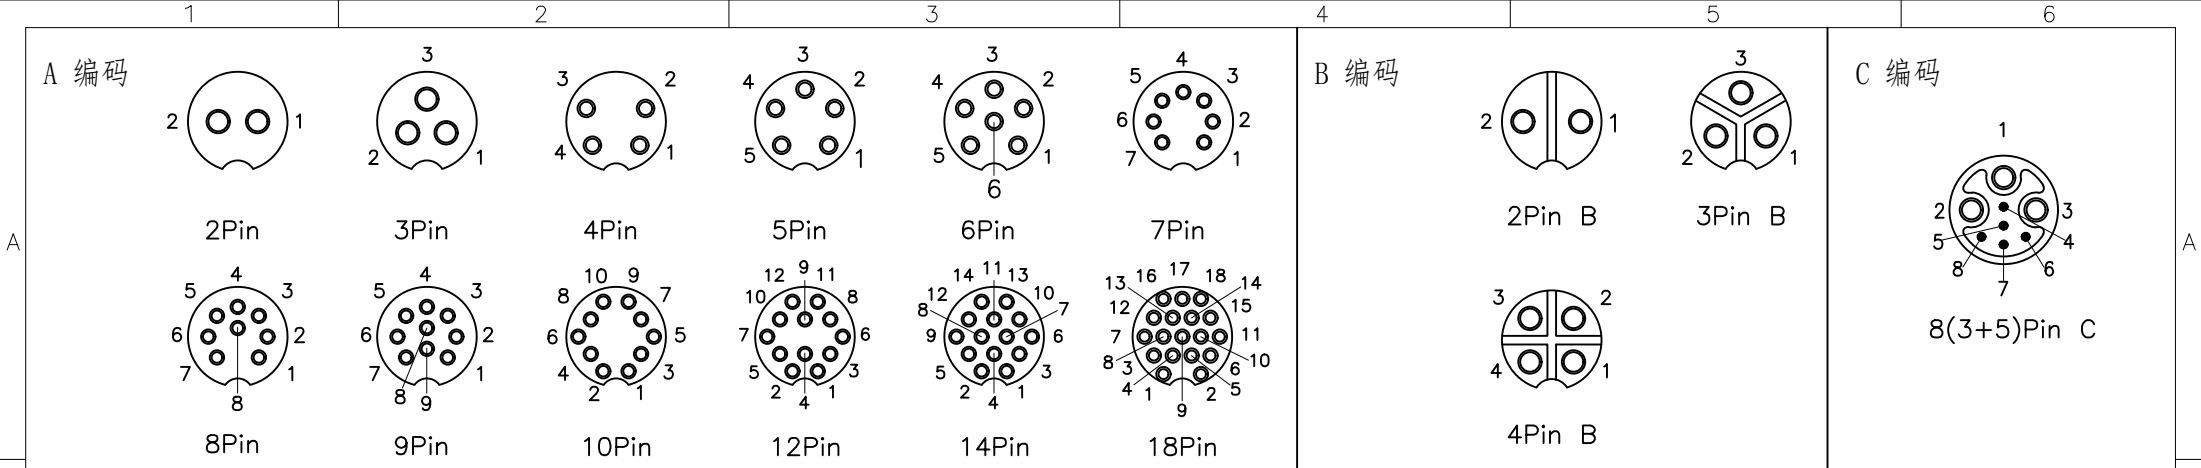

芯数	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P	14P	18P	2P B	3P B	4P B	8P B
额定电压	125V	125V	125V	125V	125V	60V	60V	60V	60V	60V	60V	30V	300V	300V	300V	125+30V
额定电流	20A	20A	10A	10A	10A	5A	5A	5A	5A	5A	5A	2A	20A	20A	20A	15+2A
防水等级	IP67/IP68															
使用温度	-45℃~105℃															

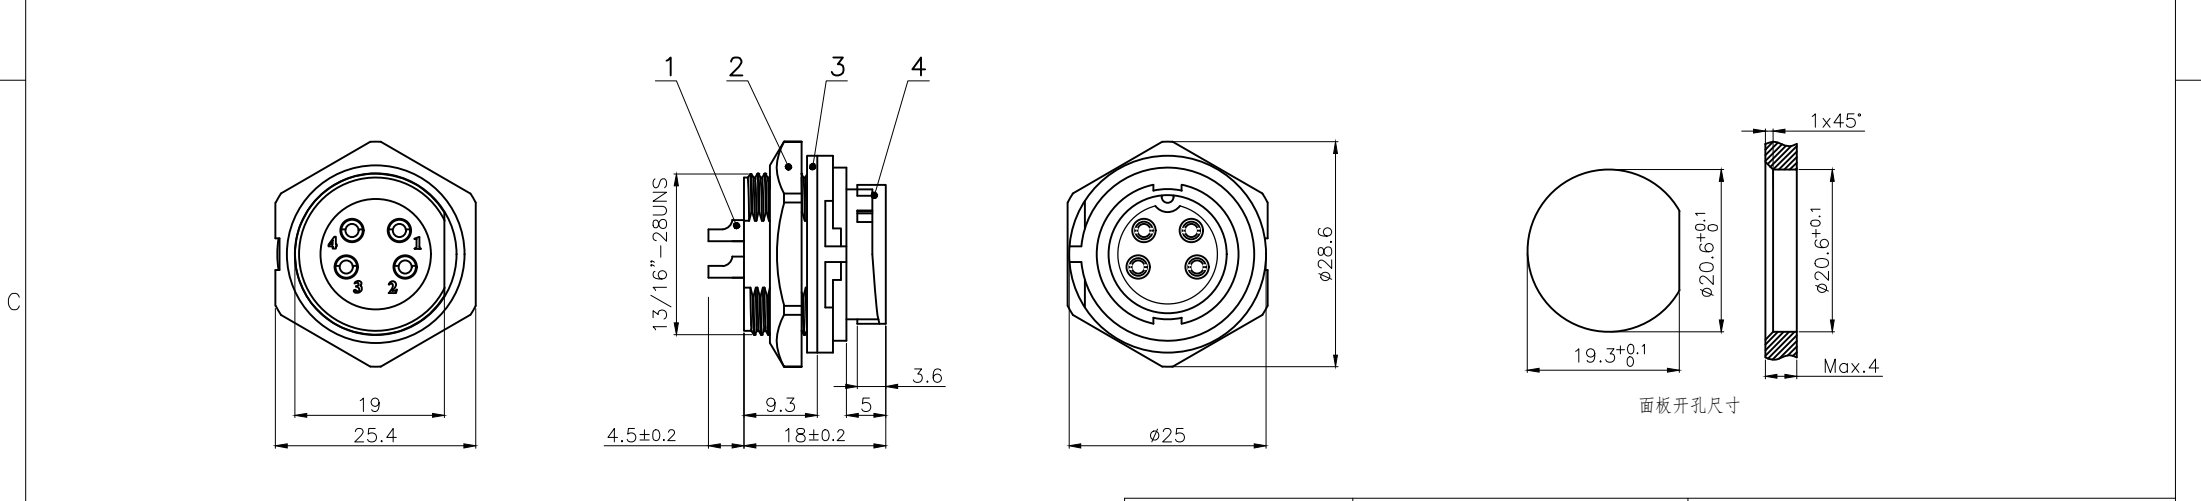

D							GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 ＜10~≤20 ±0.2 ＜20~≤50 ±0.5 Angle ±1°	DWN		
	4	E13 卡扣式板前针型插座外壳	尼龙	/	pc	1		CHK		
	3	E13 塑胶座子防水垫片 Φ24.8×Φ20.6×1.5	硅胶	/	pc	1		APVD		
	2	E13 塑胶六角螺母 13/16-28UNS	尼龙	/	pc	1			TITLE E13 卡扣式板前孔型插座	
	1	E系列 焊线式母针短针	黄铜	镀金	pc	2~18	 THIRD ANGLE	UNIT MM	REV A	PART NO
	No.	Specification	Material	Treat	Unit	Q'ty		SIZE A4	SHEET 1 OF 1	DRAWING NO E13P-BB-Sx