

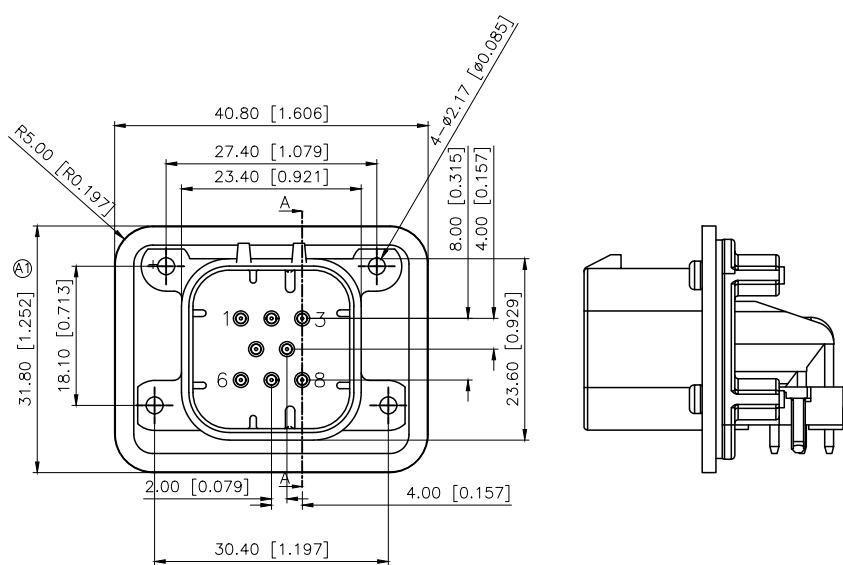


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A)X1	尺寸变更, 图面升级整理图面	2025.1.9	阿树

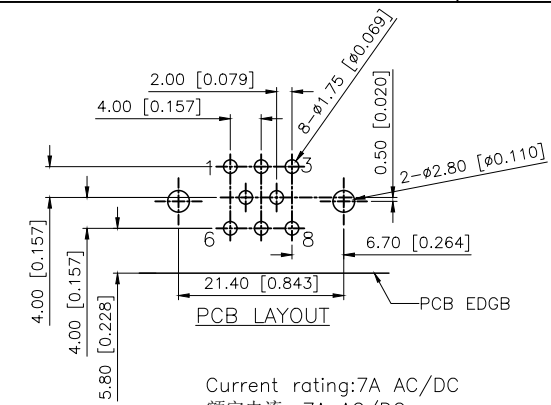

K776280WR-08-PTXXB

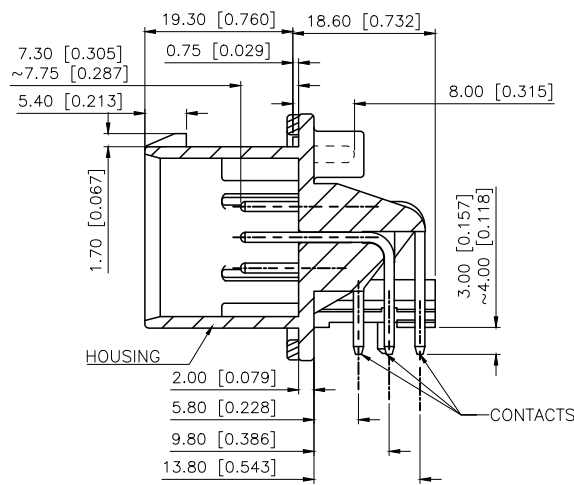

Current rating: 7A AC/DC
额定电流: 7A AC/DC
Temperature range: -40°C ~ +85°C
温度范围: -40°C ~ +85°C



PART NO.:

K 776280 W R-08-PT SN B
① ② ③ ④ ⑤ ⑥ ⑦ ⑧



- ① K: XKBTEK - Car Connector
- ② XKB Series No
- ③ Category: W - Wafer
- ④ Welding Board Angle: R - Straight 90°
- ⑤ Row No. Pin No: 08 Pin
- ⑥ Material: PT - PBT
- ⑦ Plating: V01 - Gold Flash ; SN - Plated Tin
- ⑧ Color: X - Black; W - White;

PLAYTING	COLOR	NAME
Gold Flash	White	K776280WR-08-PTV01W
Gold Flash	Black	K776280WR-08-PTV01B
Plated Tin	White	K776280WR-08-PTSNW
Plated Tin	Black	K776280WR-08-PTSNB


K776280WR-08-PTSNB	PBT	Brass	K776280H
PART NO	Material	Material(Pin)	Suitable XKB Housing

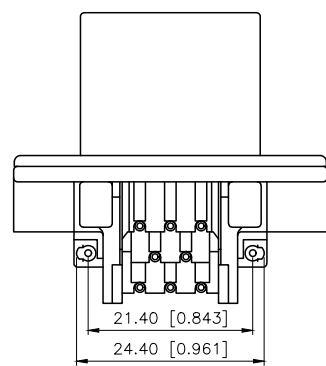

K776280WR-08-PTXXW

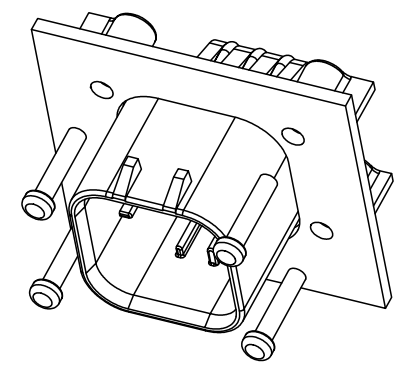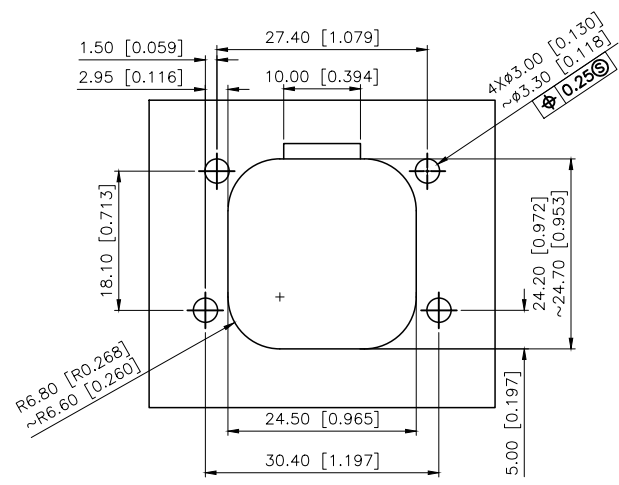

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

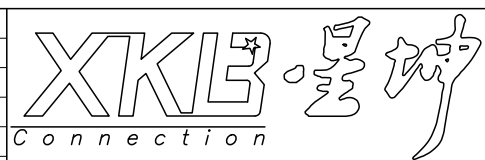

DESIGN	阿树	VIEW:	①
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE: 4.0mm Automobile connector		
PART NO.: K776280WR-08-PTSNB		
DWG NO.: X-K776280WR-08-PTSNB		
SCALE	PAGE	REVISION
N/A	1/1	A1