



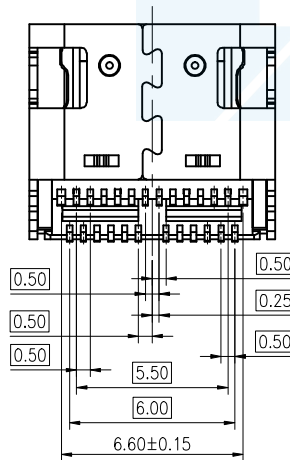
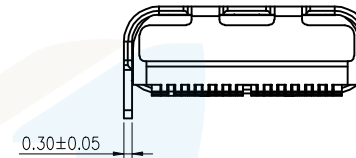


RoHS
Compliant



3D VIEW

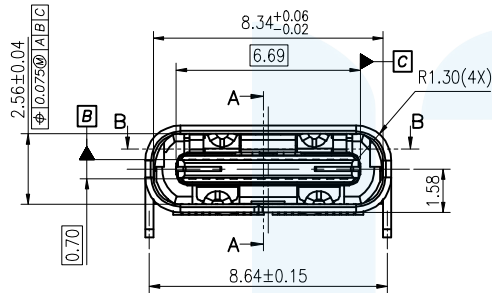

ZONE	ECN.NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

NOTES:

- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 5~20N
 - REMOVAL FORCE: 8~20N FROM 1 TO 1000 CYCLES
6~20N FROM 1001 TO 10000 CYCLES
 - DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - CURRENT RATING: 5.0A FOR VBUS PINS (Pin A4,A9,B4,B9)
1.25A FOR GND PINS (PIN A1,A12,B1,B12)
0.25A FOR OTHER PINS (PIN A1,A12,B1,B12)
 - LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
- INSULATION RESISTANCE: 100MΩ MIN.
- DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -30°C~+85°C.
- IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

PIN ASSIGNMENT

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
5	MIDDLE BLADE	STAINLESS STEEL 0.15t Ni 50u" MIN. UNDER PLATED OVER ALL. Au G/F" Min PLATED ON SOLDER AREA.									1
4	FRONT SHL	STAINLESS STEEL 0.30t Ni 50u" MIN. UNDER PLATED OVER ALL.									1
3	EMI SPRING	STAINLESS STEEL 0.10t CLEANING ONLY									1
2	CONTACT	COPPER ALLOY 0.15t NICKEL 30u" MIN. UNDER PLATED OVER ALL. GOLD PLATED ON THE FUNCTIONAL AREA OF CONTACT;GOLD FLASH PLATED ON SOLDER AREA.									24
1	HOUSING	HIGH TEMPERATURE PLASTIC COLOR BLACK									1
NO.	DESCRIPTION	MATERIAL		REMARKS							QTY

LZG


LZG INDUSTRIAL CO. LTD

PART NAME	USB TYPE C 24 PIN	TOLERANCE UNLESS	0.0±0.20	0.°±2°	UNIT: mm	
PART NO.	ZB48043-24SBAP-A	OTHERWISE SPECIFIED:	0.00±0.15	0.0°±1°		
			0.000±0.05	0.00°±0.5°		





DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB48043-24SBAP-A			SHEET	1/1

RoHS
Compliant

ZONE	EC N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

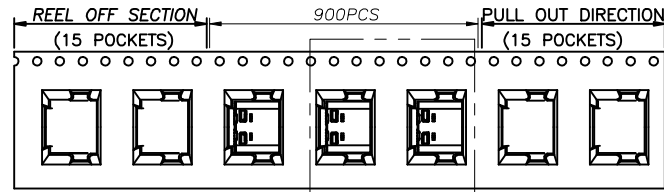

SEE DETAIL X

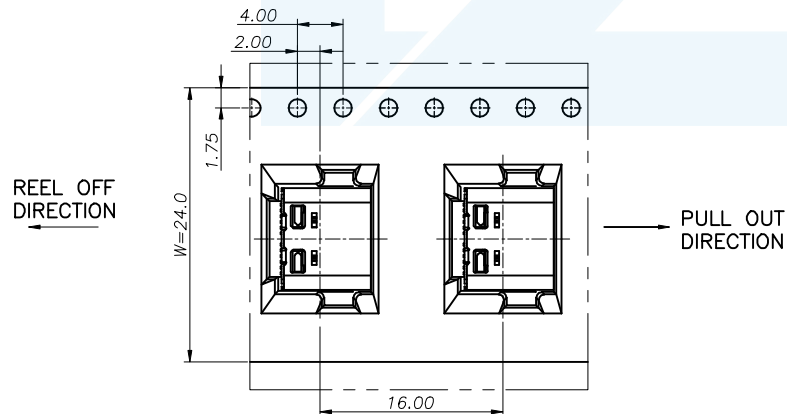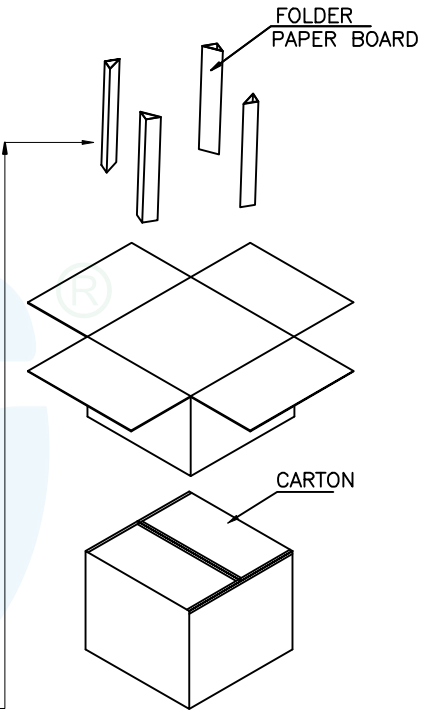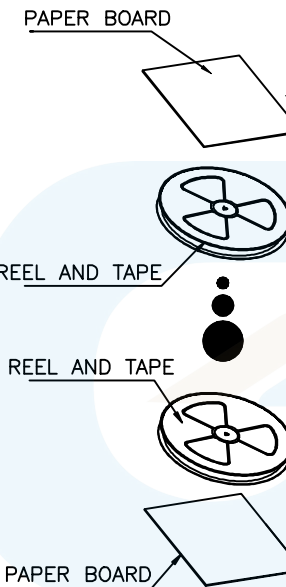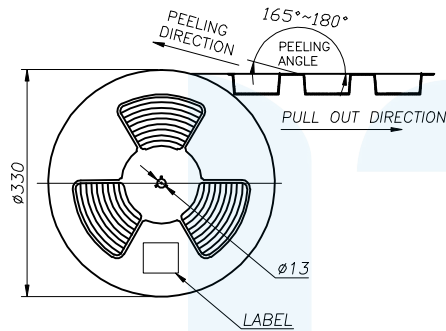

	REEL	CARTON
CONNECTOR (PCS)	900	9000

LZG

LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB48043 PACKING DRAWING	SHEET	1/1		

PART NAME	USB TYPE C 24 PIN	TOLERANCE UNLESS	0.0±0.20	0.°±2°	UNIT:	mm
PART NO.	ZB48043-24SBAP-A	OTHERWISE SPECIFIED:	0.00±0.15	0.0°±1°		
			0.000±0.05	0.00°±0.5°		