


⚠ WARNING	
	ELECTROCUTION HAZARD Disconnect electric power to system at main fuse or circuit breaker box before servicing. Failure to do so could result in death or serious injury.
	FIRE HAZARD Do not exceed transformer ratings. Higher voltage may damage control and could cause personal injury or property damage.

SPECIFICATIONS:


INPUT:	117 V, 50/60Hz
OUTPUT:	36V CT: SEE OUTPUT AMP RATING & VA CAPACITY IN TABLE
INSULATION RATING:	CLASS A (105°C)
TEMPERATURE RISE:	65°C RISE ABOVE 40°C AMBIENT
DIELECTRIC STRENGTH:	1500 VRMS

NOTE:


1. Primary leads Black, #22 AWG.
2. All leads 8" long minimum.

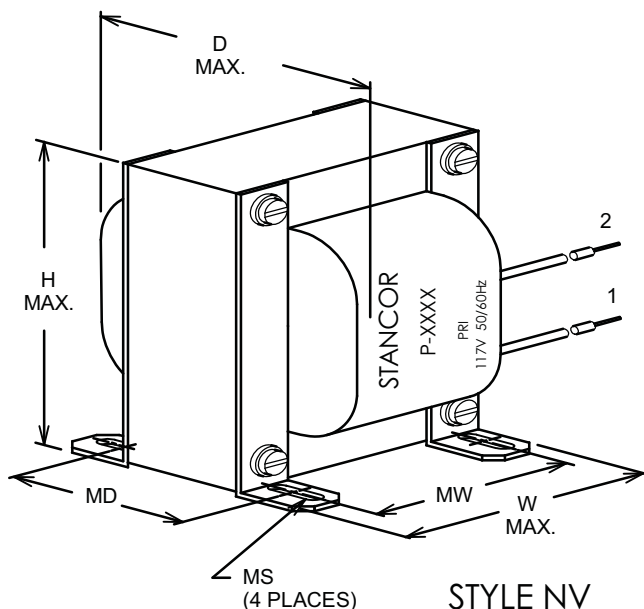

STYLE NV

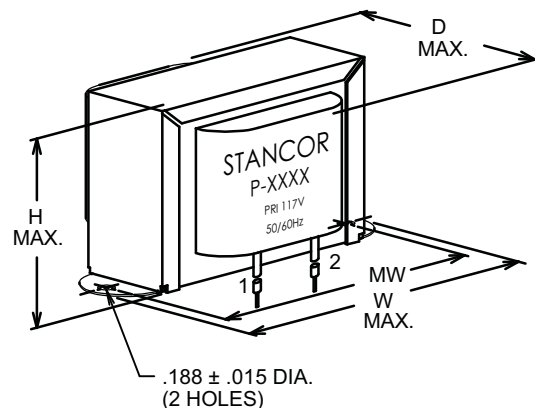

STYLE A

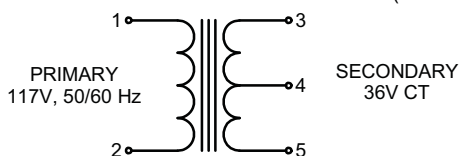

SCHEMATIC DIAGRAM

STANCOR Part No.	Sec. Curr.	VA Cap.	Sec. Lead Wires				Mtg. Style	Dimensions - Inches						Wt. Lbs.
			Color			Awg		H	W	D	MW	MD	MS ± .031	
			#3	#4 (CT)	#5									
P-8611	.135A	4.9	BLU	YEL	BLU	#22	A	1.44	2.44	1.50	2.00	-	-	0.35
P-8612	.30A	10.8	BLU	YEL	BLU	#22	A	1.75	2.88	1.62	2.38	-	-	0.60
P-8613	.55A	19.8	GRN	YEL	GRN	#22	A	2.06	3.31	2.00	2.81	-	-	1.00
P-8671	1.0A	36.0	BLU	YEL	BLU	#22	A	2.38	3.75	2.38	3.12	-	-	2.00
P-8672	2.0A	72.0	GRN	YEL	GRN	#22	NV	3.56	2.88	2.88	2.25	2.13	.188 X .312	3.50
P-8673	4.0A	144.0	GRN	YEL	GRN	#18	NV	4.38	3.56	3.19	2.75	2.38	.188 X .312	6.00
P-8674	6.0A	216.0	GRN	YEL	GRN	#18	NV	4.69	3.81	3.62	3.06	2.47	.203 X .500	8.30