






RoHS
Compliant

ZONE	ECN.N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

SPECIFICATIONS:



1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

3D VIEW

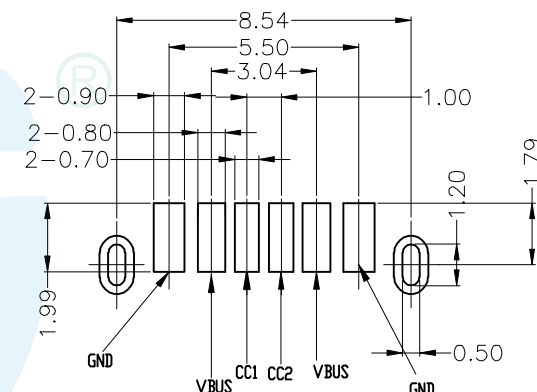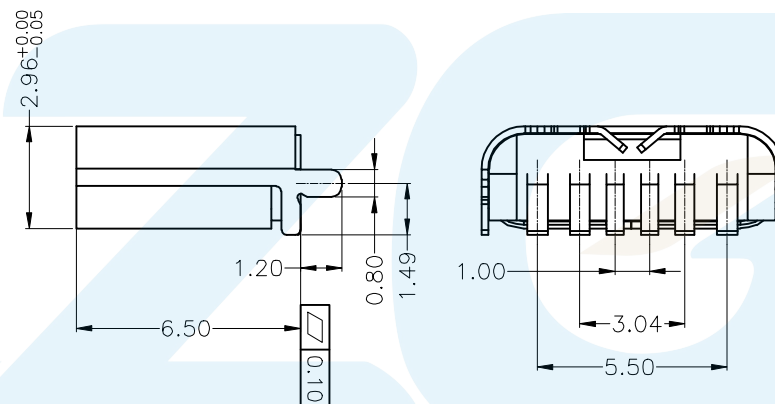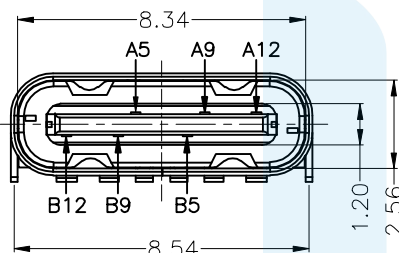

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

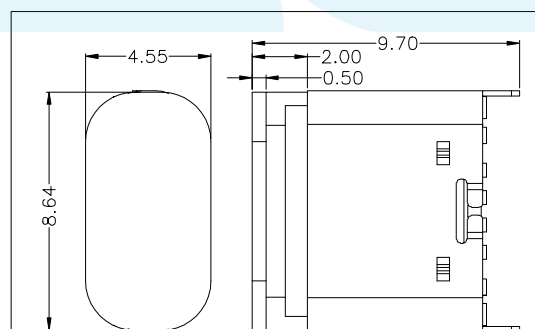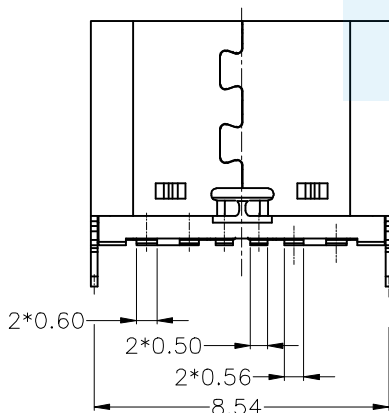

加塞子示意图

5	COVER	HIGH TEMPERATURE PLASTIC	COLOR BLACK	1
4	FRONT SHELL	STAINLESS STEEL	CLEAN	1
3	SHELL	STAINLESS STEEL	Ni:50u" Plated	1
2	CONTACT	COPPER ALLOY	Au1u"/Ni:50u" Plated	6
1	HOUSING	HIGH TEMPERATURE PLASTIC	COLOR BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

LZG

LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	翁进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB48009-06SBAP-A			SHEET	1/1

PART NAME	TYPE C 6 PIN	TOLERANCE UNLESS	0.0±0.3	0.°±2°	UNIT:	
PART NO.	ZB48009-06SBAP-A	OTHERWISE SPECIFIED:	0.00±0.2	0.0°±1°	mm	
			0.000±0.1	0.00°±0.5°		