
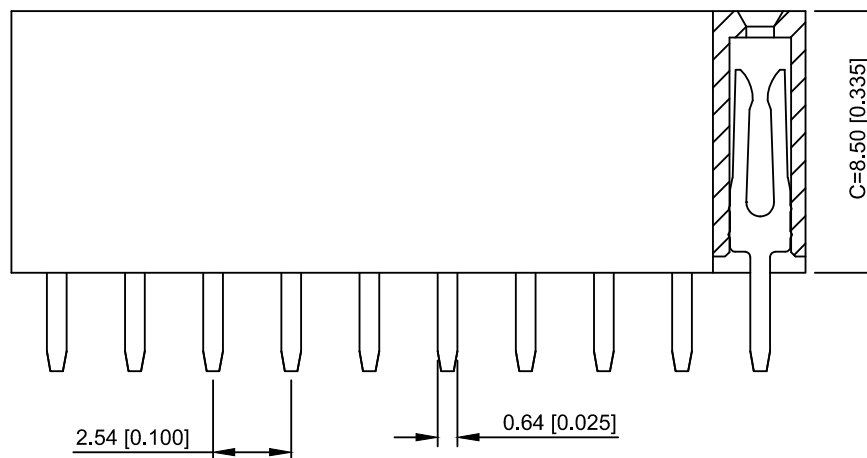
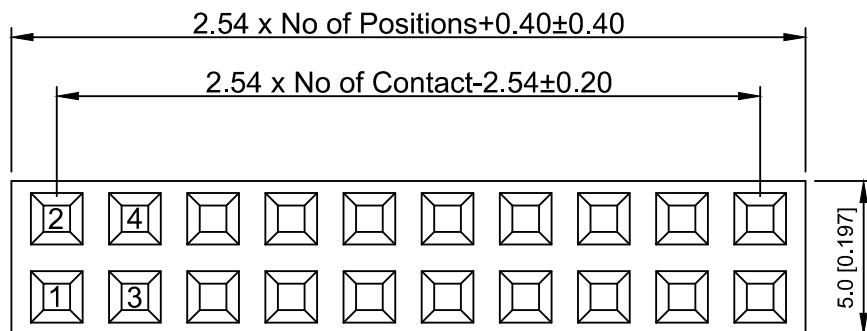


PCB LAYOUT

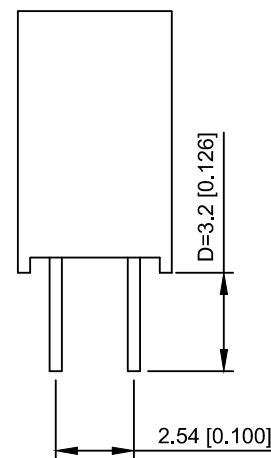

Specifications:

规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 1000V AC/minute
 耐受电压: 1000V AC/分钟
 Temperature range: -40°C~+105°C
 温度范围: -40°C~+105°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤20mΩ
 接触电阻: ≤20mΩ
 Material: PA6T UL94V-0
 材质: PA6T UL94V-0
 Plating Category: 1U"Gold
 镀层: 1U"Gold
 Wave soldering temperature: 255±5°C, 10S
 波峰焊温度: 255±5°C, 10S

X6521 F V - 2x22 - C85 D32
 ① ② ③ ④ ⑤ ⑥

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Stright 180°
- 4.Row No.Pin No:2xXX-2x01~2x40P
- 5.Plastic Height:C=8.5mm
- 6.Pin Length:D=3.2mm

X6521FV-2x22-C85D32	PA6T	Brass	X6521W
PART NO	Material	Material(Pin)	Suitable XKB Wafer

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	2.54mm BTB Connector
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	X6521FV-2x22-C85D32
			DWG NO.:
			X-X6521FV-2x22-C85D32
WEIGHT		SHEET	REVISION
		1/1	A0