



[My Cart](#) |



[My Part Lists](#) |



[Sign In/Register](#) |



[English \(Change\)](#)

Have a Question?

Chat with a Product Information Specialist



What can we help you find?



[Products](#)

[Industries](#)

[Resources](#)

[About TE](#)

[My Account](#)

[Innovation](#)

[Support Center](#)


[Home](#) > [Products](#) > [Two-Piece, High-Speed Connectors](#) > [Product Feature Selector](#) > [Product Details](#)

2007781-3 Product Details

[Share](#)

[Print](#)

[Email](#)

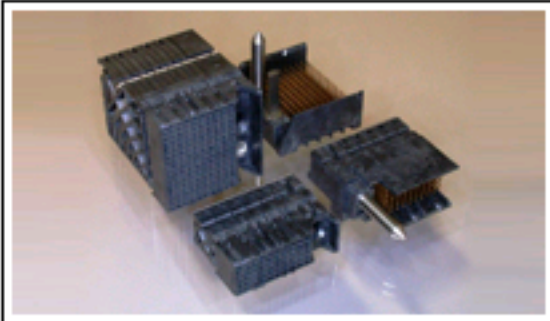

2007781-3

TE Internal Number: 2007781-3

Active

[View 3D PDF](#)

Impact High Density Backplane Connectors



Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Impedance = 100 Ω
- Board-to-Board Configuration = Right Angle
- Connector Style = Header
- Header Type = Partially Shrouded
- PCB Mounting Orientation = Vertical

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [IMPACT, 3 PAIR, 10 COLUMN, HEADER RIGHT GUIDED, OPEN...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing](#) (DXF, Version B)
- [3D Model](#) (IGES, Version B)
- [3D Model](#) (STEP, Version B)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- PCB Mounting Orientation = Vertical
- PCB Mount Retention Type = Action/Compliant Tail and Screw(s)
- PCB Mount Alignment Type = Locating Post(s)
- Shrouded = Yes - Partial
- UL File Number = E28476

Electrical Characteristics:

- Impedance (Ω) = 100
- Operating Voltage Reference = AC/DC
- Operating Voltage (VAC) = 120
- Operating Voltage (VDC) = 120

Termination Features:

- Tail Length (mm [in]) = 1.2 [0.047]

Dimensions:

- PCB Hole Diameter (mm [in]) = 0.39 [0.015]
- Length (X-Axis) (mm [in]) = 25.55 [1.006]
- Width (Z-Axis) (mm [in]) = 16.70 [0.657]
- Profile Height (Y-Axis) (mm [in]) = 11.95 [0.470]

Body Features:

- Header Type = Partially Shrouded

Contact Features:

- Contact Length (mm [in]) = 5.50 [0.217]
- Contact Plating, Termination Area, Material = Matte Tin
- Contact Plating, Termination Area, Thickness (μm [μin]) = 1.27 [50]
- Contact Type = Pin

Housing Features:

- Connector Style = Header
- End Wall Location = Open
- Housing Color = Black
- UL Flammability Rating = UL 94V-0

Configuration Features:

- Number of Differential Pairs Per Column = 3
- Number of Columns = 10
- Guide Location = Right
- Number of Rows = 9
- Number of Positions = 90
- Connector Contact Configuration (No. of Pos./Type) = 60/Signal, 30/Ground

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant
- UL Rating = Recognized
- CSA Certified = Yes

Environmental:

- Operating Temperature ($^{\circ}\text{C}$ [$^{\circ}\text{F}$]) = -55 - +85 [-67 - +185]

Conditions for Usage:

- Board-to-Board Configuration = Right Angle

Operation/Application:

- Industry Application = Networking (Communications)

Packaging Features:

- Packaging Method = Tube

Other:

- Brand = TE Connectivity

Corporate Information

[About TE](#)

[Investors](#)

[News Room](#)

[Supplier Portal](#)

[Careers](#)

[Terms & Conditions](#)

[Privacy Policy](#)

Quick Links

[Distributor Inventory](#)

[Product Cross Reference](#)

[Documents & Drawings](#)

[Product Compliance Support Center](#)

[Site Map](#)

Customer Support

[Email or Chat With Us](#)

[Find a Phone Number](#)

[Knowledge Base](#)

[Manage Your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

