
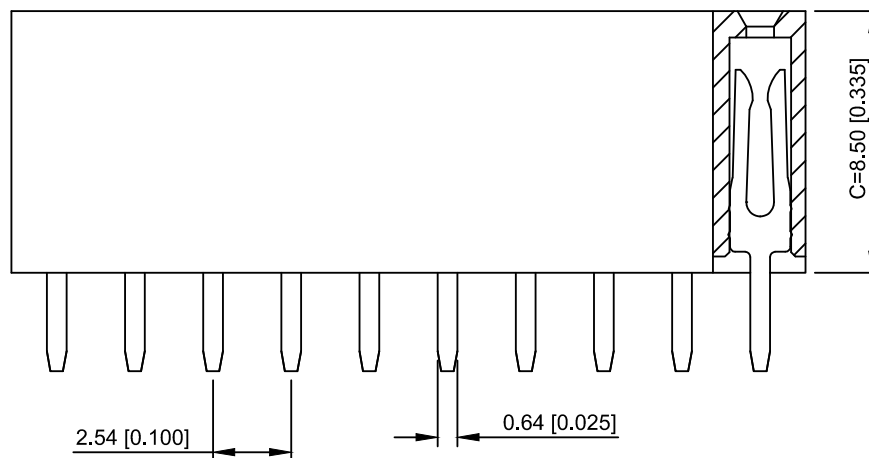
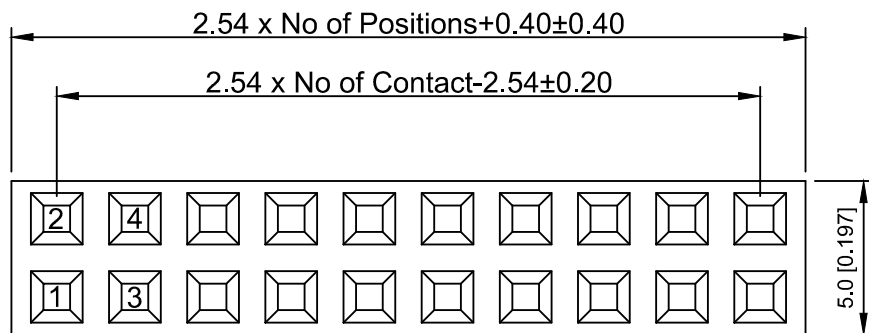


PCB LAYOUT

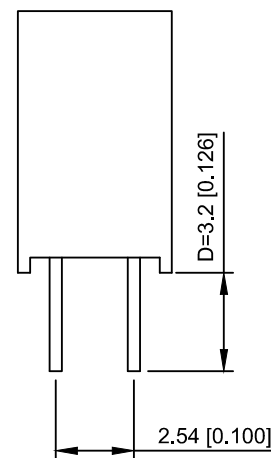

Specifications:

规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 1000V AC/minute
 耐受电压: 1000V AC/分钟
 Temperature range: -40°C ~ +105°C
 温度范围: -40°C ~ +105°C
 Insulation resistance: ≥ 1000MΩ
 绝缘电阻: ≥ 1000MΩ
 Contact resistance: ≤ 20mΩ
 接触电阻: ≤ 20mΩ
 Material: PA6T UL94V-0
 材质: PA6T UL94V-0
 Plating Category: 1U" Gold
 镀层: 1U" Gold
 Wave soldering temperature: 255 ± 5°C, 10S
 波峰焊温度: 255 ± 5°C, 10S

X6521 F V - 2x19 - C85 D32
 ① ② ③ ④ ⑤ ⑥

1. Series No
2. Category: F-Female
3. Welding Board Angle: V-Stright 180°
4. Row No. Pin No: 2xXX-2x01~2x40P
5. Plastic Height: C=8.5mm
6. Pin Length: D=3.2mm

X6521FV-2x19-C85D32	PA6T	Brass	X6521W
PART NO	Material	Material(Pin)	Suitable XKB Wafer

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	2.54mm BTB Connector
CHKD	UNIT: mm/in	PART NO.: X6521FV-2x19-C85D32
APPD	SIZE: A4	DWG NO.: X-X6521FV-2x19-C85D32
		WEIGHT
		SHEET
		REVISION
		1/1
		A0