

1




2

3



4

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.28	阿树

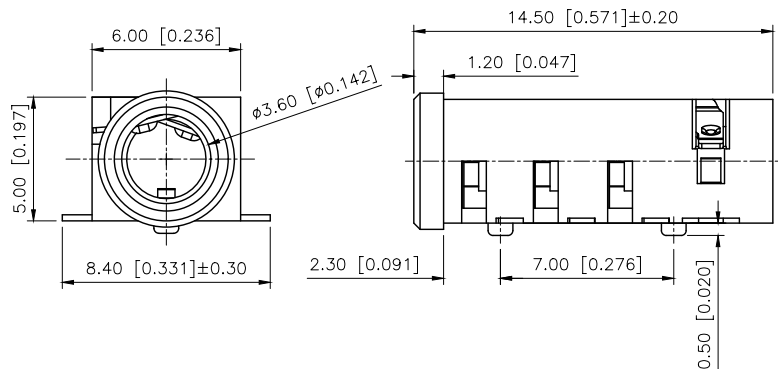

SPECIFICATION
1.Rating : DC 30V 0.5A;
2.Contact resistance: $\leq 30\text{m}\Omega$;
3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-20N;
6.life test: 5,000 cycles.

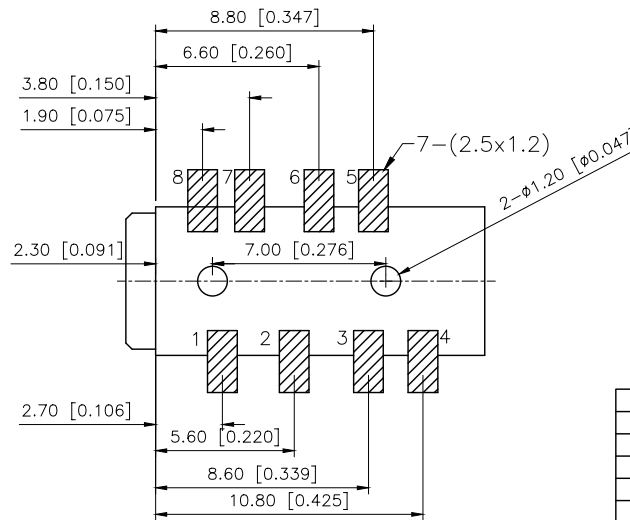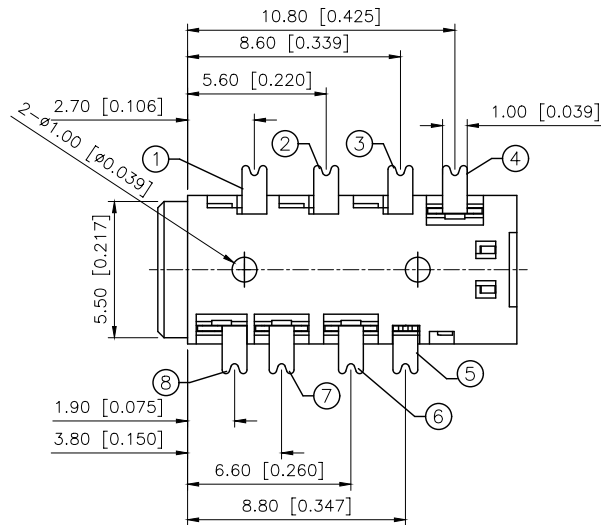

PCB LAYOUT TOP VIEW

Model No.	PJ-35367	PJ-35368
Schematic		

10	HOUSING	1	PA9T	
9	SPRING PLATE	1	SUS	
8	TERMINAL 8	1	Phosphor bronze	Ag-Plating
7	TERMINAL 7	1	Phosphor bronze	Ag-Plating
6	TERMINAL 6	1	Phosphor bronze	Ag-Plating
5	TERMINAL 5	1	Phosphor bronze	Ag-Plating
4	TERMINAL 4	1	Phosphor bronze	Ag-Plating
3	TERMINAL 3	1	Phosphor bronze	Ag-Plating
2	TERMINAL 2	1	Phosphor bronze	Ag-Plating
1	TERMINAL 1	1	Phosphor bronze	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN

阿树

VIEW:

MODEL TYPE:
3.5 PHONE JACK

CHECKED

UNIT: mm/in

PART NO.:
PJ-35368-B-SMT

APPROVED

SIZE: A4

DWG NO.:
X-PJ-35368-B-SMT

1

2

3

4