

You are here: Products » Connectors f.con » PCB connectors » Male headers » MK LP 43 ... » MK LP 43



▶ Heatsinks f.cool

▶ Cases f.case

▼ Connectors f.con

▶ Sockets

▼ PCB connectors

■ Male headers

■ Female headers

■ Direct female connectors

■ Jumpers

▶ IDC-connectors

▶ D-Sub connectors

■ Brackets for PC

▶ Optoelectronics


Male headers

MK LP 43 ...

MK LP 43 50 Z

Low profile

add to request

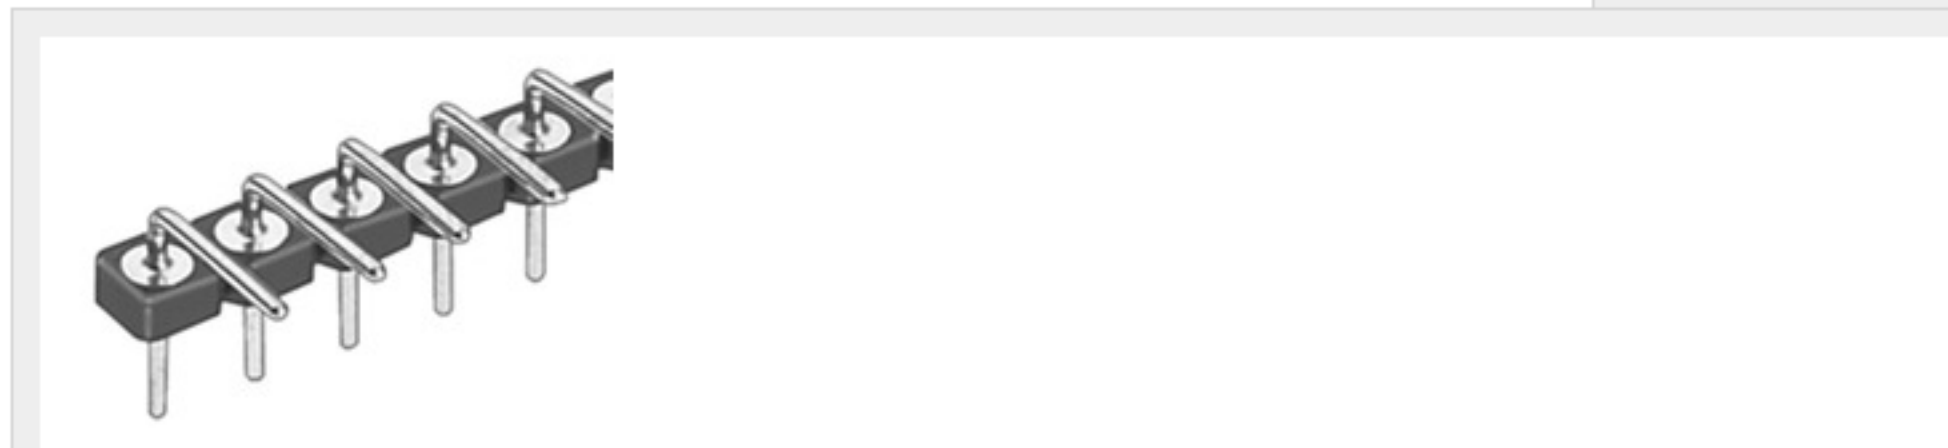

Features Technical Drawing Service Accessories / related products

no. of contacts	50
contact material	CuZn-alloy
surface contact / contact sleeve	Ni+≥0.2µm Au Ni+4...6µm Sn
surface of contact	tin-plated
shock resistance	50 g
volume resistance	≤10 mΩ
vibration resistance max.	15 g
capacity between two adjacent contacts	≤0,4 pF
nominal current	1.5 A
nominal voltage	60 V DC
test voltage	1000 V
insulating body material	PA 4.6. GF
temperature range	-40°C... +163°C (260°C/10 s)
class of flammability	UL 94 V-0
specific insulation resistance	>10.0 ^{7.0} Ω·m
connection type	soldering
version	low profile
reflow solderable	yes