
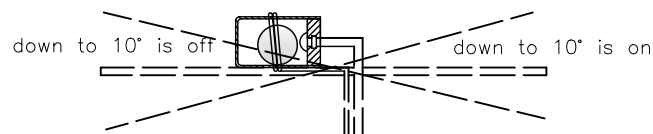


A

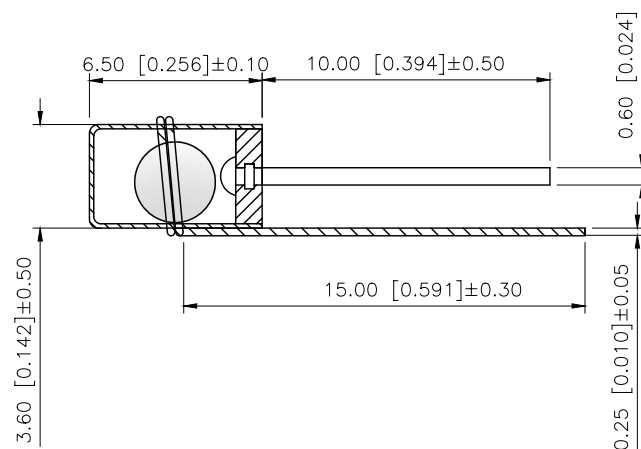

Voltage: < 12V
Current: < 20mA
Conduction time: 2ms
Closed circuit resistance: < 1 ohm
Open circuit resistance: > 1 ohm
High temperature resistance: 120 degrees
Terminal tension: 500gf / min
Humidity: 25~95%RH
Operating life: 100000 times

⑥	Heat shrinkable tube	1	PET	
⑤	Spring	1	Phosphor copper	Tinning
④	Rubber stopper	1	PLC	
③	BALL	1	Brass	Plate with silver
②	PIN	1	Brass	Gold-plated
①	Copper tube	1	Brass	Plate with silver
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: Vibration switch		
CHECKED		UNIT: mm/in	PART NO.: SW-105AC-10G		
APPROVED		SIZE: A4	DWG NO.: X-SW-105AC-10G		
PRECISION CO., LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1