


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.18	阿树

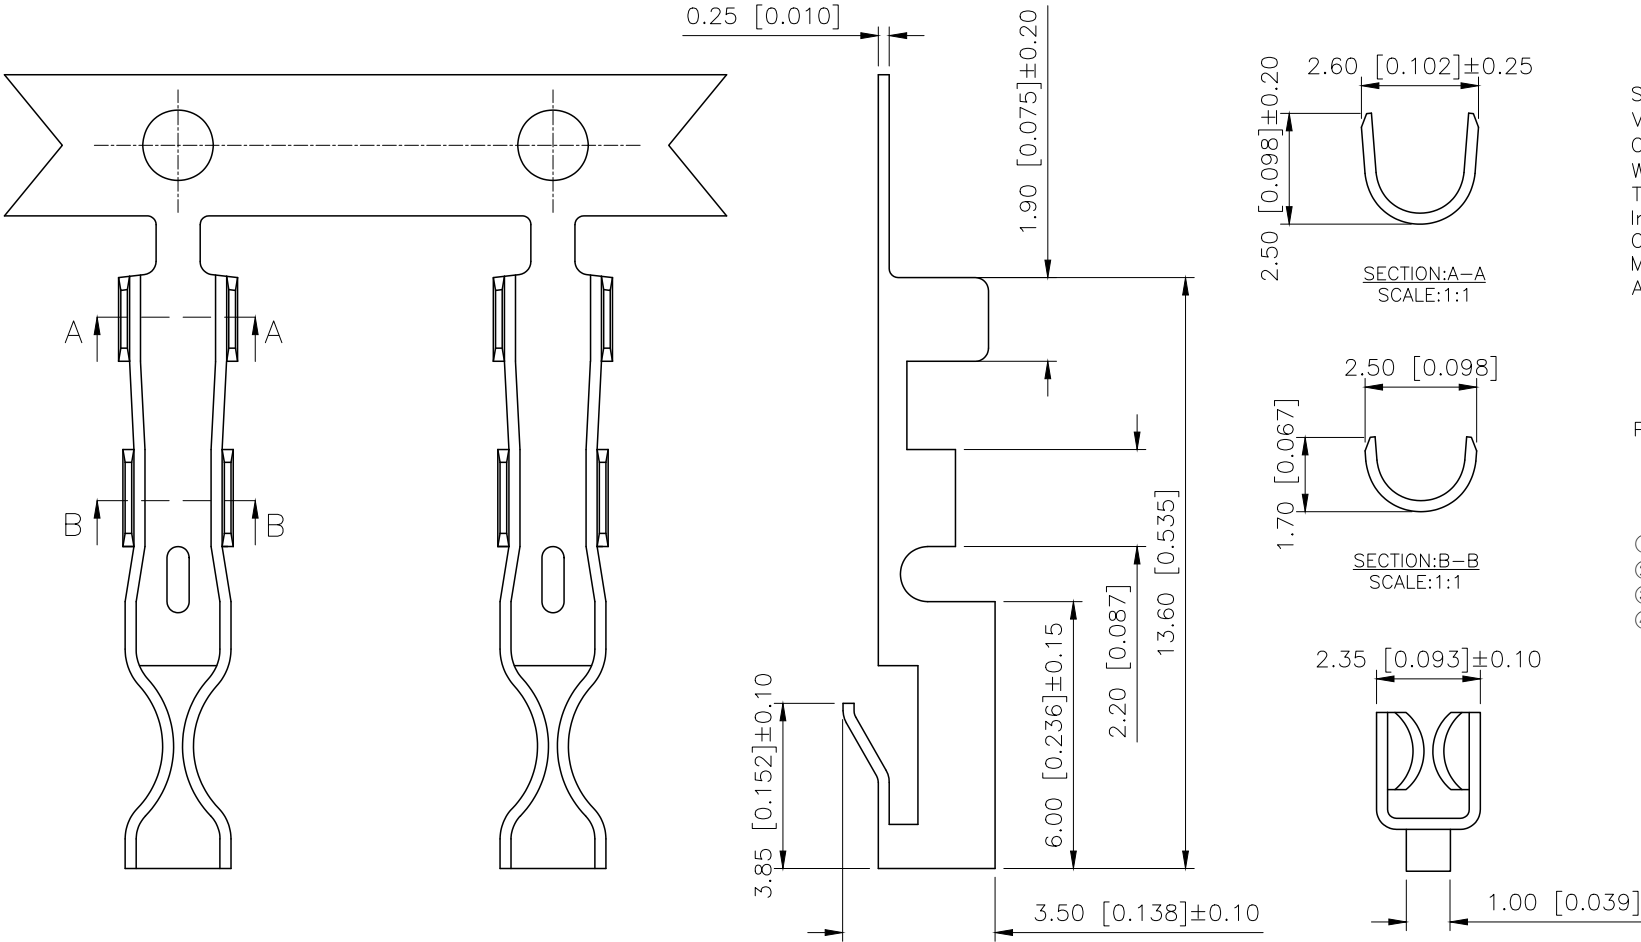

Specifications:
Voltage rating:250V AC/DC
Current rating:7A AC/DC
Withstanding voltage:1500V AC/minute
Temperature range:-40℃-+125℃
Insulation resistance:≥1000MΩ
Contact resistance:≤20mΩ
Material:Phosphoric bronze Tin-plated
Applicable Wire Sizes:AWG#18~22

PART NO.:

X8475 I-P SN
① ② ③ ④

- ①Series Number.
②Category: T-terminal
③Material:P-Phosphor bronze
④Plating:SN-Bright tin plating

X8475T-PSN	Phosphoric bronze	AWG#18-22	TIN Plated	X8475H
PART NO	Material	Wire Range	Finish	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	7.50mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X8475T-PSN
APPROVED		SIZE: A4	DWG NO.: