

1

2

3

4

A

A

B

B








C

C

D

D

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.8	阿树

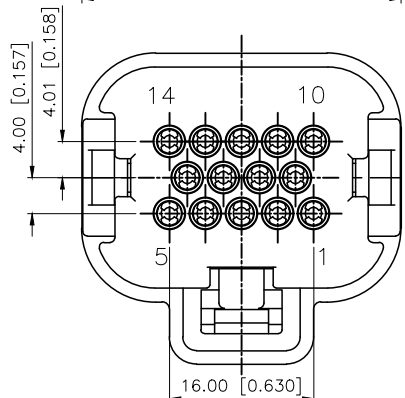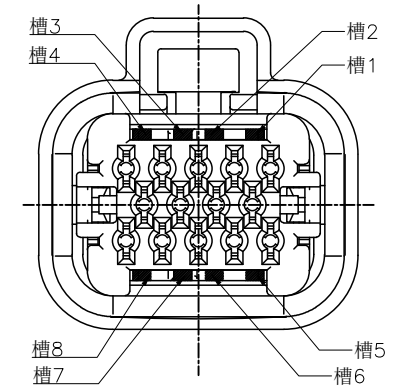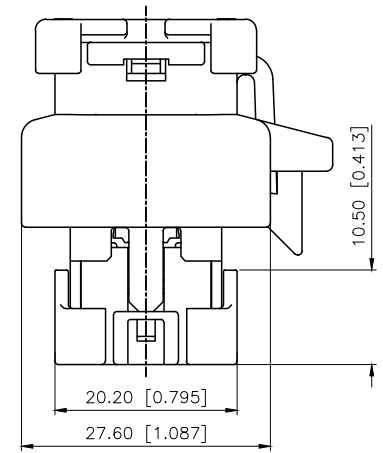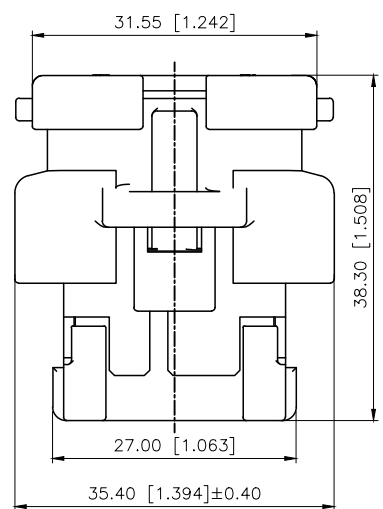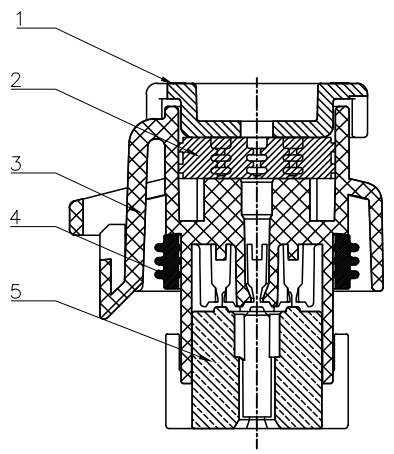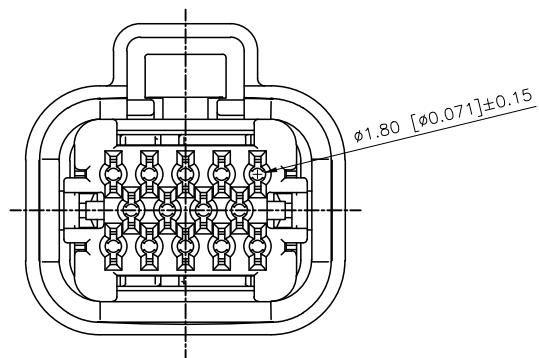

Temperature range: -40°C - +125°C
温度范围: -40°C - +125°C

PART NO.:

① K 776280 ② H-14-PT ③ B
④ ⑤ ⑥

Slot location	Color	PART NO
3 7	Black	K776280H-14-PTB
1 6	White	K776280H-14-PTW
2 8	Gray	K776280H-14-PTGY
3 5	Blue	K776280H-14-PTBL

- ①K:XKBTEK-Car Connector
- ②XKB Series No
- ③Category:H-Housing
- ④Row No.Pin No:14 Pin
- ⑤Material:PT-PBT
- ⑥Color:X:B-Black; W-White; GY-Gray; BL-Blue

5	Terminal locks	Red	PBT	1
4	Rubber rings	Green	Silica gel	1
3	Housing		PBT	1
2	Rubber plugs	Green	Silica gel	1
1	Cover	Black	PBT	1
NO	NAME	COLOR	MATERIAL	QTY

K776280H-14-PTB	PBT	K776280W	K776280T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	4.0mm Automobile connector
PART NO.:	K776280H-14-PTB
DWG NO.:	X-K776280H-14-PTB

1

2

3

4