

标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

Materials and Electroplating

- ①. Plastic body: PA66
- ②. Clip: Copper, nickel plated
- ③. Square box: Copper, nickel plated
- ④. Plastic cover plate: PA66
- ⑤. Screw: M2.0, iron, galvanized, straight groove

Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min



Using wire diameter: 28-16AWG 1.5mm²

mechanical properties

Temperature range: -40 $^{\circ}\text{C}$ ~+105 $^{\circ}\text{C}$ Instantaneous temperature: +250 $^{\circ}\text{C}$ for 5
econds

Torque: 0.2Nm (1.77Lbin)

Stripping length: 6-7mm

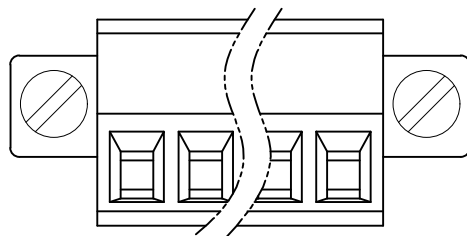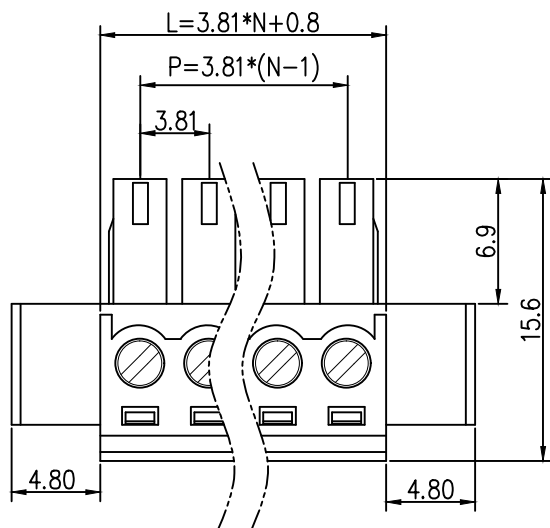

2	方盒	铜	镀镍	
1	基座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司			品 名	接线端子																				
				TITLE																					
				料 号	HC-JXDZKM-3.81-4P																				
				PART NO																					
GENERAL TOLERANCES (UNLESS SPECIFIED)				比 列	1 : 1																				
				SCALE																					
<table border="1" data-bbox="1413 1351 1518 1422"><tr><th colspan="3">公差参数</th></tr><tr><th>Range</th><th>DimP</th><th>DimL</th></tr><tr><td>2~6P</td><td>±0.10</td><td>±0.20</td></tr><tr><td>7~12P</td><td>±0.20</td><td>±0.30</td></tr><tr><td>13~18P</td><td>±0.25</td><td>±0.40</td></tr><tr><td>19~24P</td><td>±0.30</td><td>±0.50</td></tr></table>				公差参数			Range	DimP	DimL	2~6P	±0.10	±0.20	7~12P	±0.20	±0.30	13~18P	±0.25	±0.40	19~24P	±0.30	±0.50	单 位	MM	制 图	AhYe
				公差参数																					
Range	DimP	DimL																							
2~6P	±0.10	±0.20																							
7~12P	±0.20	±0.30																							
13~18P	±0.25	±0.40																							
19~24P	±0.30	±0.50																							
				UNIT	DRAW																				
X.X ±0.35 X.XX ±0.25 X.XXX ±0.15				张 数	1 OF 1	审 核	夏操云																		
				PART NO	CHECKED																				
				版 本	批准	赵亮亮																			
				REV	APPROVE																				

