

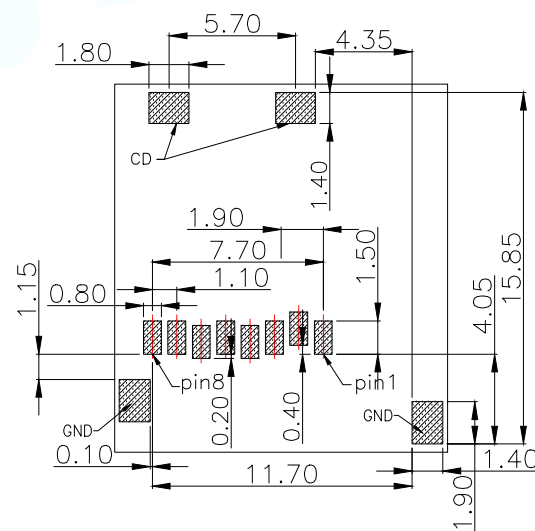
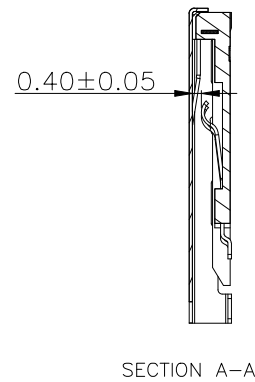


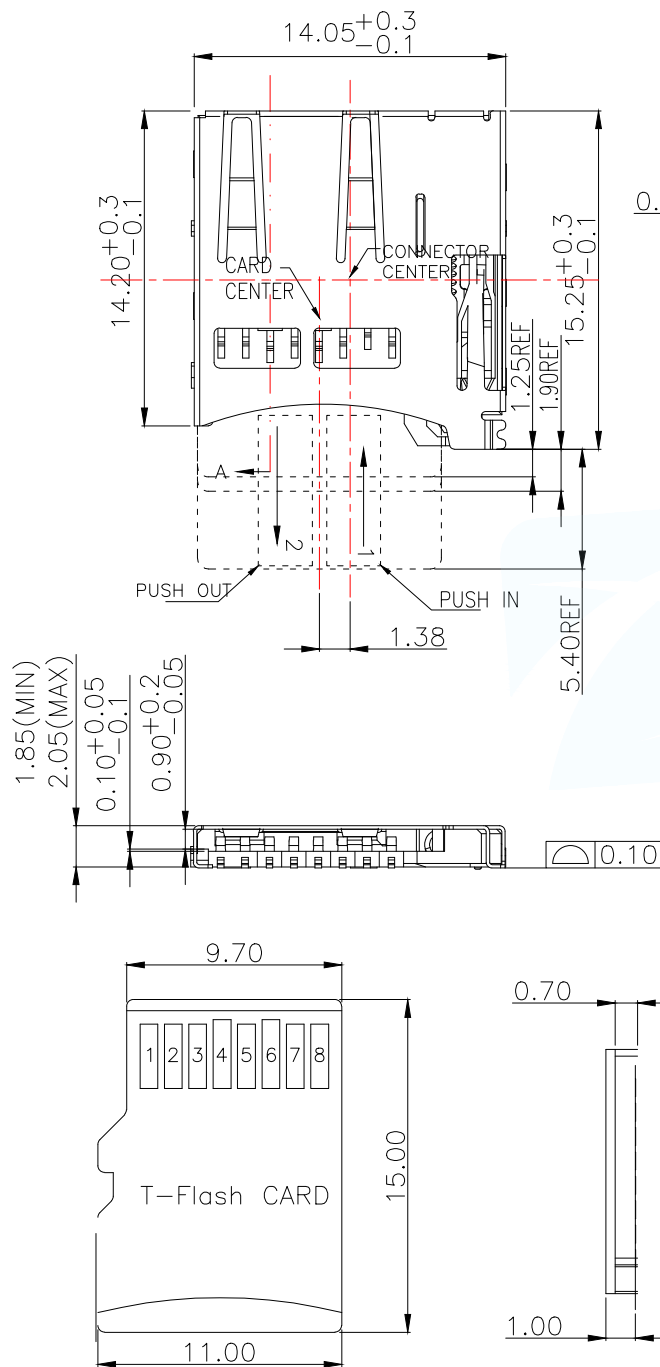

▨ PAD AREA
■ KEEP OUT AREA

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

Circuit Diagram for Detect Switch



NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.


2.PLATING:

UNDERPLATE: NICKEL.

CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: TIN OVER NICKEL.

3.MULTIMEDIA CARD COMPATIBLE

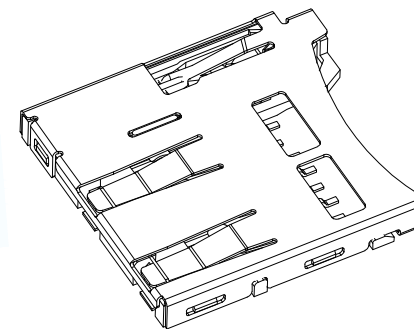

TF CARD PIN DEFINE

PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

MANUFACTURE DWG



东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,Ltd

UNLESS OTHERWISE
SPECIFIED TOLERANCES



TITLE:T-FLASH CARD PUSH
PUSH B TYPE 内焊

PAR TF-101B-ARP8

DECIMALS:

X.X:±0.35

ANGLES:

X.X':±3°

X.XX:±0.25

X.XX':±2°

X.XXX:±0.15

CUSTOMER COPY


SCALE:1:1

SIZE:A4


UNIT:MM

SHEET:1F1


REV:A

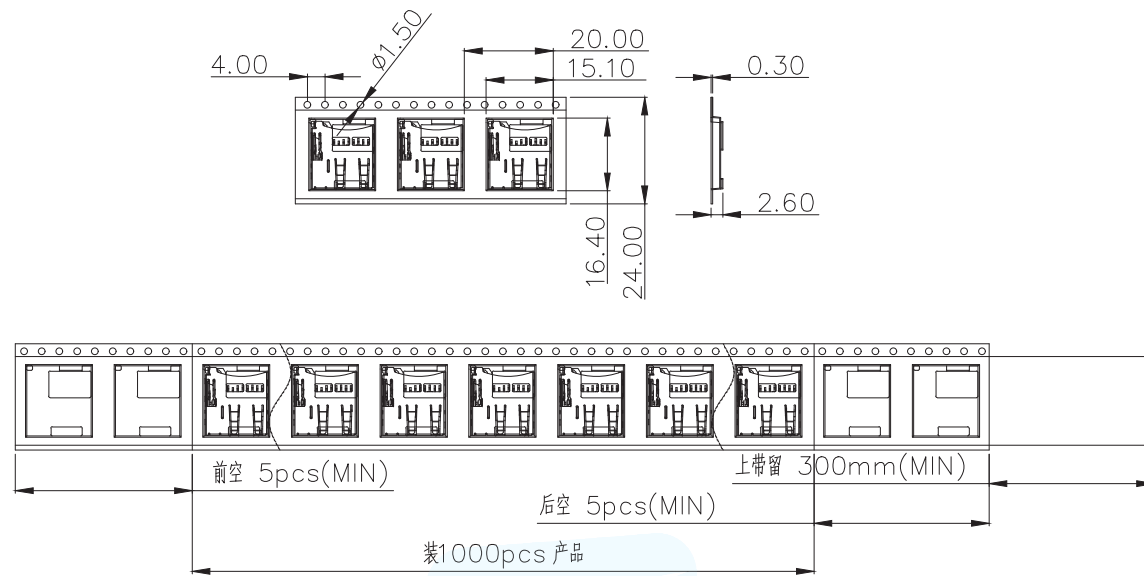

NO.1

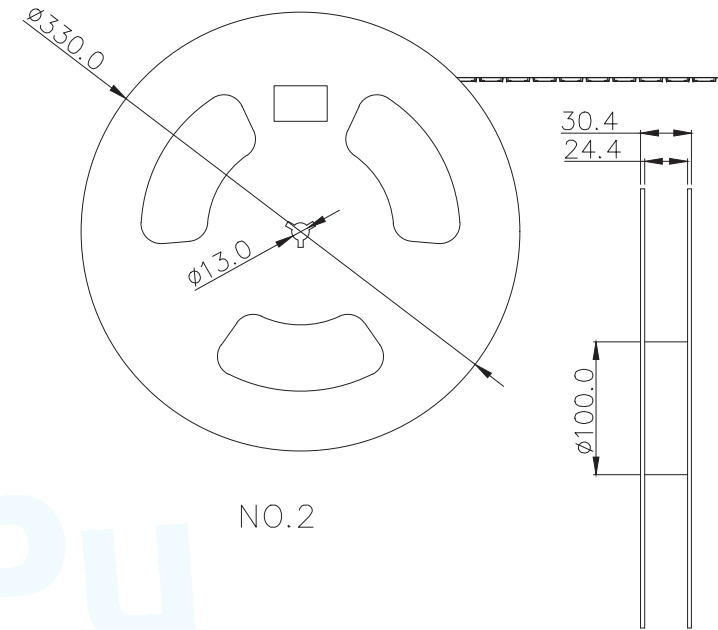


NO.2

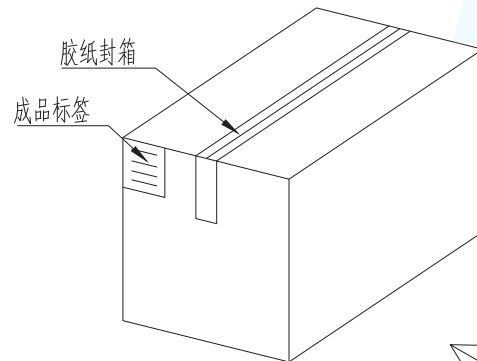


纸箱规格: 330*330*385

NO.4

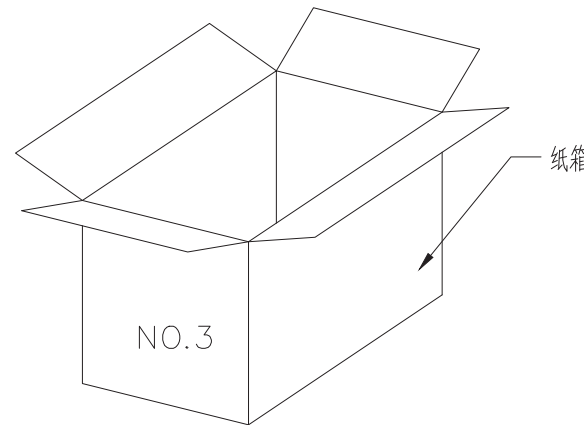

NO.3



1. 材质要求:

- 1.1 纸箱的材质为K=K; 外形尺寸为33*33*38.5CM;
- 1.2 卷盘的材质为PS, 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
- 1.3 卷带的材质为PS, 卷带的外形尺寸为20200*24.00*2.6mm

2. 包装要求:

- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留300MM长度。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的12盘叠放入纸箱中共计12Kset;
- 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: T-FLASH CARD PUSH PUSH B TYPE 内焊	
			PAR	TF-101B-ARP8
DECIMALS:	ANGLES:		DWN	
X.X: ±0.35	X.X': ±3°		CHKD	
X.XX: ±0.25	X.XX'': ±2°		APVD	
X.XXX: ±0.15			SCALE1: 1	UNIT: MM
CUSTOMER COPY		SIZE: A4	SHEET: 1F1	REV: A