

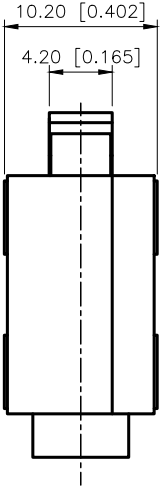


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A2	N/A		图面修正, 图面升级整理图面	2024.12.2	阿树
A3	N/A		系列图拆分	2025.03.31	阿树

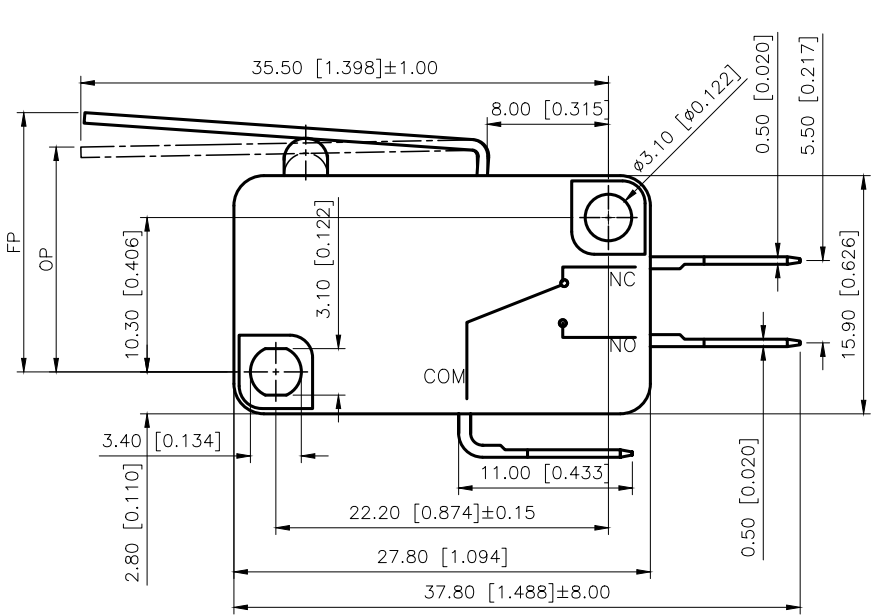


Specifications:
规格:
电气额定值Electrical Rating: 16A 250V AC
环境温度Ambient temperature:T125
电气寿命Electric lifetime:5E4 cycles
动作力Operating force:0.5-1.5N
自由位置Free position:≤13.5mm
动作位置Operating position: 14.7±1mm
接触电阻Contact Resistance:≤50mΩ
耐压(Withstand Voltage): 端与端500V/60S/5mA,
端与壳1500V/60S/5mA。
绝缘电阻(Insulation Resistance): ≥100MΩ (Test Voltage 500VDC)

电路简图

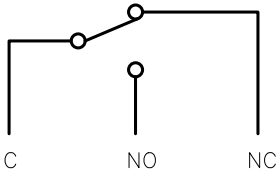

端子尺寸:



AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: MICRO SWITCH
CHECKED		UNIT: mm/in	PART NO.: DV-16-278N-1
APPROVED		SIZE: A4	DWG NO.: