




FACE VIEW - FEMALE INSERT
SCALE 2 : 1



1 BROWN
3 BLUE
4 BLACK



1 BROWN
2 WHITE
3 BLUE
4 BLACK






1 BROWN
2 WHITE
3 BLUE
4 BLACK
5 GRAY

PART NUMBER	POLES	DESCRIPTION	FINISHED LENGTH
1200700056	3	8R3A00A18A120	12.0" +.75" -0 [0.3M +19.1MM -0]
1200700114	4	8R4A00A18A120	12.0" +.75" -0 [0.3M +19.1MM -0]
1200700201	5	8R5A00A18A120	12.0" +.75" -0 [0.3M +19.1MM -0]

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 250V
CURRENT RATING: 4 AMPS
4. PROTECTION: IP67 (WHEN MATED)
5. DIMS SHOWN ARE FOR REFERENCE ONLY

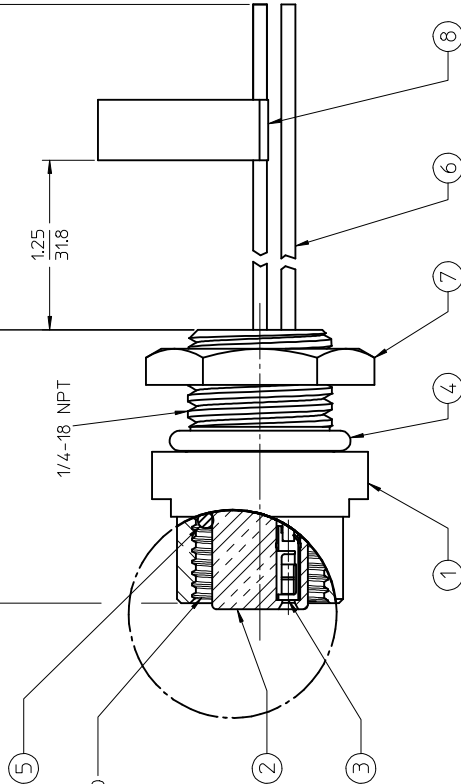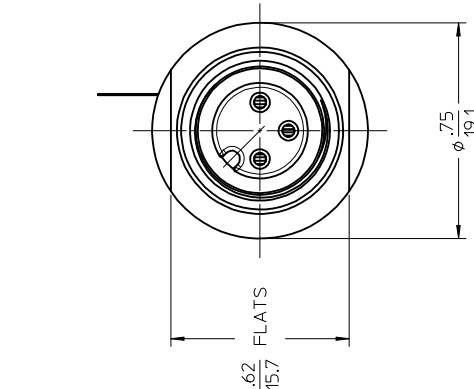

REF. KNOCK-OUT HOLE

REF. ATTACHED TO
BLUE WIRE

FINAL ASSEMBLY
1200700056 (SHOWN)

8	FLAG LABEL	VINYL	BLACK/YELLOW
7	PANEL NUT	STEEL	ZINC PLATED
6	WIRE, 22-1	PVC INSULATED	SEE FACE VIEWS
5	O-RING (MATING)	VITON	RED
4	O-RING (PANEL)	NITRILE	BLACK
3	CONTACT SOCKET	CU ALLOY	GOLD PLATED
2	INSERT, FEMALE	NYLON	BLACK
1	SHELL	ALUMINUM	CLEAR ANODIZE
ITEM	DESCRIPTION	MATERIAL	FINISH

REV	DESCRIPTION
B	REDRAWN, ADD NOTES CORRECTED PIN-OUT CR 1 & 3 EC NO: PG2017-0287 DRWNR:RSTONE 2016/09/14 CHKD:K COX 2016/16/19 APP:TWOLDEGBR1E2016/09/16

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNIT'S	THIRD ANGLE PROJECTION
	4 PLACES ± .0005	IN/MM	3:1	INCH	
	3 PLACES ± .0005	DATE	TITLE		
	2 PLACES ± .0005	27/08/09	MICRO-CHANGE RECEPTACLE		
	1 PLACE ± .0005	27/08/09	M12 FEMALE, 22 AWG		
	ANGULAR ± 1/2°	27/08/09	1/4 NPT FRONT PANEL MT		
		2009/08/27	MOLEX INCORPORATED		
			MOLEX INCORPORATED		
			SD-120070-056		
			1 OF 1		
			SHEET NO.		