

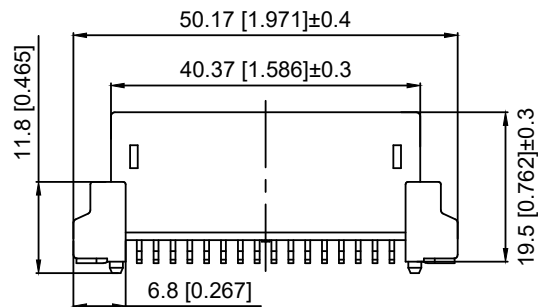
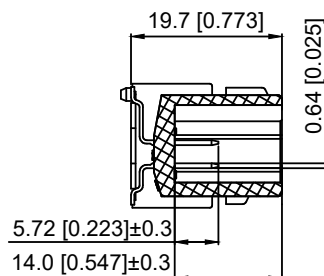


Current rating:3A AC/DC
 额定电流: 3A AC/DC
 Temperature range:-40℃~+245℃
 温度范围: -40℃~+245℃

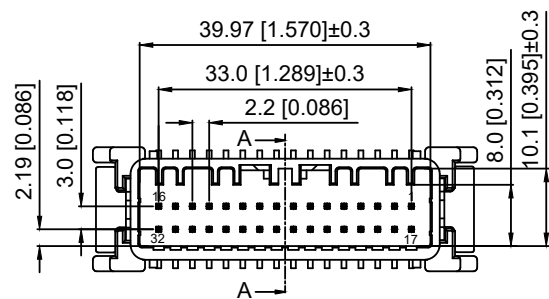



SEC:A-A

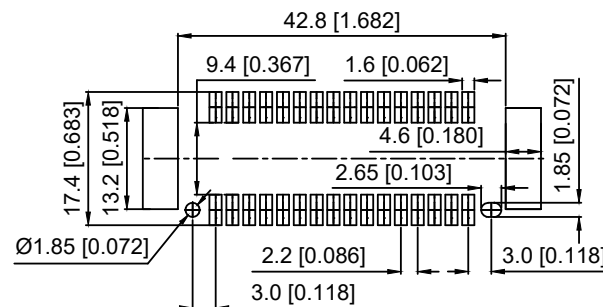

PCB Layout

K 137635 W V S - 2x16 - PS SW
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- 1.K: XKBTEK-Car Connector
- 2.XKB Series No
- 3.Category:W-Wafer
- 4.Welding Board Range:V-Stright 180°
- 5.Welding Way:S-SMT
- 6.Row No.Pin No:2xXX-2x16 Pin
- 7.Material:PS-PPS+GF40% (Black color)
- 8.Palting:SW-Matte Tin Plated

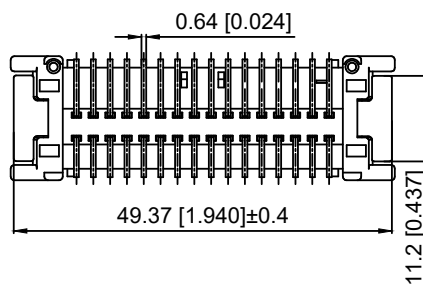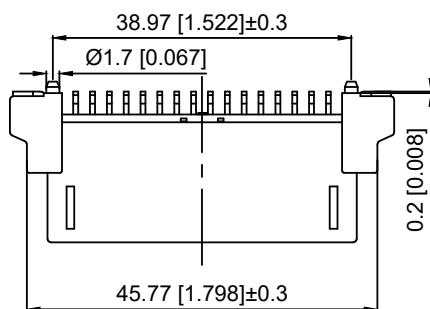

K137635WVS-2x16-PSSW	PPS	Brass	K137635HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND	SCALE: N/A	MODEL TYPE: 2.2mm Automobile connector
DWN	VIEW:	PART NO.: K137635WVS-2x16-PSSW
CHKD	UNIT: mm/in	DWG NO.: X-K137635WVS-2x16-PSSW
APPD	SIZE: A4	WEIGHT
XKB INDUSTRIAL PRECISION CO.,LIMITED		SHEET
		REVISION
		1/1
		A0

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKB