


Male headers

SL 21 THR 097 48 G

square 0.635 mm, standard

[add to](#)

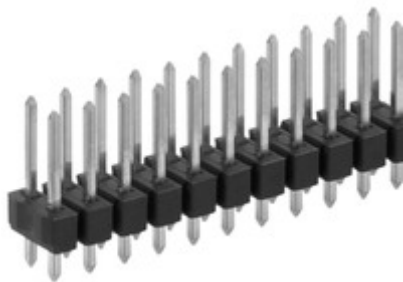

[Features](#) [Technical Drawing](#) [Variants](#)

no. of contacts	48
contact material	CuSn-Legierung
surface contact / contact sleeve	Ni+0,2µm Au Ni+4...6µm Sn
surface of contact	gold-plated
volume resistivity	≤5 mΩ
nominal current	3 A
nominal voltage	250 V AC
test voltage	2000 V
material isolation body	PA 4.6, GF
temperature range	-40 °C ... +163 °C (260 °C / 10 s)
class of flammability	UL 94 V-0
insulation resistance	>10 ¹² Ω
connection type	THR
version	standard
reflow solderable	yes