

Features

- 85°C, 1,000 hours assured
- Standard micro miniature size with 5mm height
- RoHS Compliance




Sleeve & Marking Color: Black & White

SPECIFICATIONS


Items	Performance																																							
Category Temperature Range	-40℃ ~ +85℃																																							
Capacitance Tolerance	±20% (at 120Hz, 20℃)																																							
Leakage Current (at 20℃)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																																							
Dissipation Factor (Tanδat 120Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>Tanδ(max)</td><td>0.35</td><td>0.25</td><td>0.20</td><td>0.17</td><td>0.15</td><td>0.13</td><td>0.10</td></tr></table>								Rated Voltage	4	6.3	10	16	25	35	50	Tanδ(max)	0.35	0.25	0.20	0.17	0.15	0.13	0.10																
Rated Voltage	4	6.3	10	16	25	35	50																																	
Tanδ(max)	0.35	0.25	0.20	0.17	0.15	0.13	0.10																																	
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table><tr><td colspan="2">Rated Voltage</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td rowspan="2">Impedance Ratio</td><td>Z(-25℃)/Z(+20℃)</td><td>7</td><td>6</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>15</td><td>12</td><td>8</td><td>6</td><td>4</td><td>4</td><td>4</td></tr></table>								Rated Voltage		4	6.3	10	16	25	35	50	Impedance Ratio	Z(-25℃)/Z(+20℃)	7	6	4	3	2	2	2	Z(-40℃)/Z(+20℃)	15	12	8	6	4	4	4						
Rated Voltage		4	6.3	10	16	25	35	50																																
Impedance Ratio	Z(-25℃)/Z(+20℃)	7	6	4	3	2	2	2																																
	Z(-40℃)/Z(+20℃)	15	12	8	6	4	4	4																																
Endurance	<table><tr><td>Test Time</td><td colspan="7">1,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="7">Within ±30% of initial value 4 ~ 6.3V; Within ±25% of initial value 10 ~ 50V</td></tr><tr><td>Dissipation Factor</td><td colspan="7">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="7">Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied with rated ripple current for 1,000 hours at 85℃.								Test Time	1,000 Hrs							Capacitance Change	Within ±30% of initial value 4 ~ 6.3V; Within ±25% of initial value 10 ~ 50V							Dissipation Factor	Less than 200% of specified value							Leakage Current	Within specified value						
Test Time	1,000 Hrs																																							
Capacitance Change	Within ±30% of initial value 4 ~ 6.3V; Within ±25% of initial value 10 ~ 50V																																							
Dissipation Factor	Less than 200% of specified value																																							
Leakage Current	Within specified value																																							
Shelf Life Test	Test time: 500 hours; other items are the same as those for the Endurance.																																							
Ripple Current & Frequency Multipliers	<table><tr><td>Freq.(Hz) Cap.(μF)</td><td>60 (50)</td><td>120</td><td>500</td><td>1k</td><td>10k up</td></tr><tr><td>Under 47</td><td>0.75</td><td>1.00</td><td>1.15</td><td>1.34</td><td>1.50</td></tr><tr><td>100 to 330</td><td>0.80</td><td>1.00</td><td>1.08</td><td>1.20</td><td>1.30</td></tr></table>								Freq.(Hz) Cap.(μF)	60 (50)	120	500	1k	10k up	Under 47	0.75	1.00	1.15	1.34	1.50	100 to 330	0.80	1.00	1.08	1.20	1.30														
Freq.(Hz) Cap.(μF)	60 (50)	120	500	1k	10k up																																			
Under 47	0.75	1.00	1.15	1.34	1.50																																			
100 to 330	0.80	1.00	1.08	1.20	1.30																																			

DIAGRAM OF DIMENSIONS

1. $\phi D = 3mm$

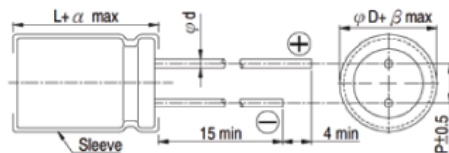

2. $\phi D \geq 4mm$

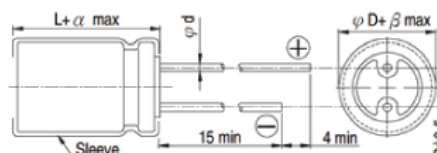

Unit: mm

LEAD SPACING AND DIAMETER					
ϕD	3	4	5	6.3	8
P	1.0	1.5	2.0	2.5	2.5
ϕd	0.4	0.45			
α	1.0				
β	0.5				

DIMENSION & PERMISSIBLE RIPPLE CURRENT

Dimension: $\phi D \times L(mm)$

Ripple Current: mA/rms at 120 Hz, 85°C

V. DC		4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
μF	Contents	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA
0.1	0R1													4×5(3×5)	1(1)
0.22	R22													4×5(3×5)	2(2)
0.33	R33													4×5(3×5)	3(2.8)
0.47	R47													4×5(3×5)	5(4)
1	010													4×5(3×5)	8.7(7)
2.2	2R2											4×5(3×5)	8.7(7)	4×5(3×5)	10(9)
3.3	3R3									4×5(3×5)	11(10)	4×5	12	4×5	13
4.7	4R7							4×5(3×5)	14(11)	4×5	14	4×5	17	5×5	20
10	100					4×5(3×5)	17(13)	4×5	23	5×5	27	5×5	27	6.3×5	31
22	220			4×5(3×5)	22(18)	5×5	30	5×5	35	6.3×5	42	6.3×5	46	6.3×5	46
33	330	4×5	27	4×5	34	5×5	41	5×5	49	6.3×5	52	6.3×5	52	8×5	66
47	470	4×5	34	5×5	37	6.3×5	50	6.3×5	58	6.3×5	58	8×5	72	8×5	80
100	101	5×5	55	6.3×5	62	6.3×5	70	8×5	99	8×5	99				