

1

2

3

4

A

B

C

D





A

B



C

D

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

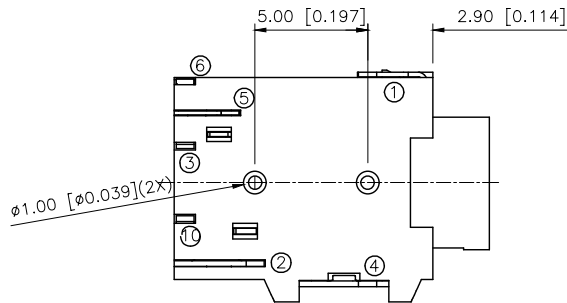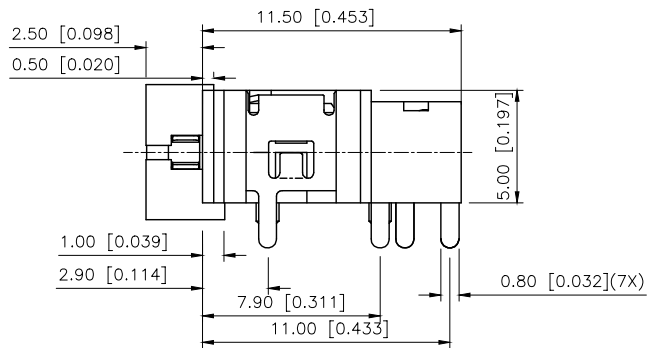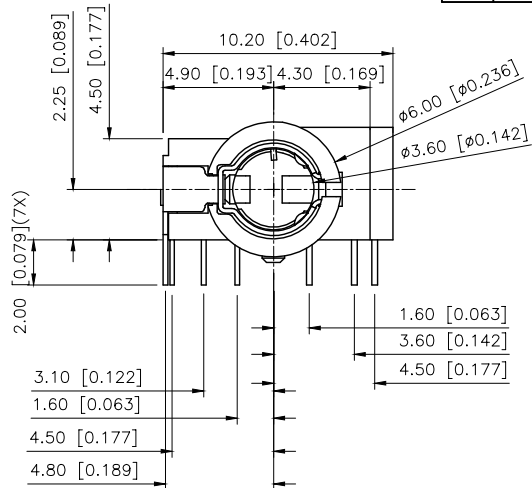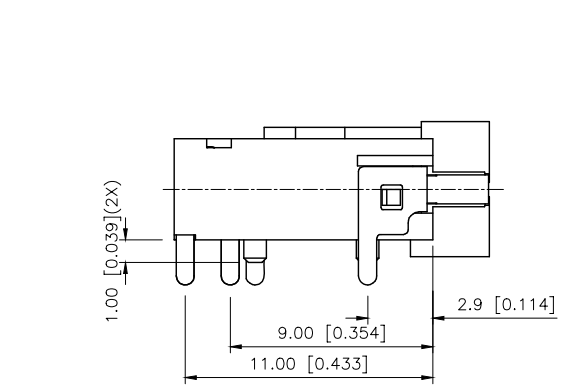

Specification:
1.Rating:DC30V 0.5A;
2.Contact resistance: $\leq 50\text{m}\Omega$;
After life test: $\leq 100\text{m}\Omega$;
3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
After life test: $\leq 50\text{M}\Omega$;
4.Withstand voltage:500V AC;
5.Insertion and extraction force:3-30N;
6.Life test:5,000 Cycles Min

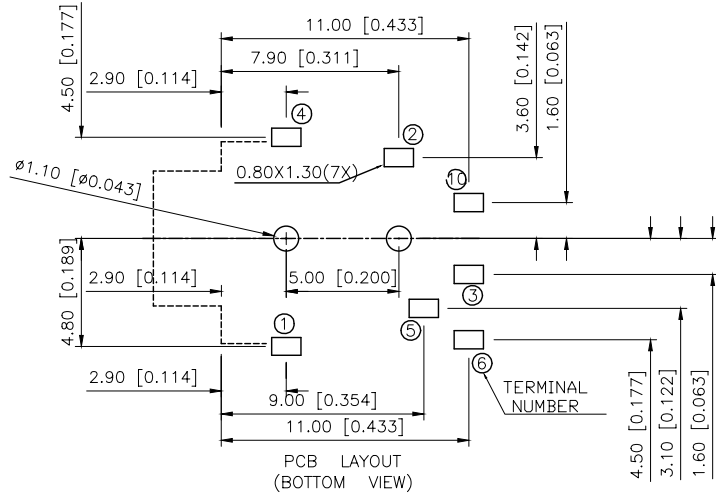

MODEL NO.	PJ-3020	PJ-3021	PJ-3022	PJ-3023
SCHEMATIC				

Plastic	High Temp. Thermoplastic	
Terminal 10	Phosphor Bronze	Silver
Terminal 6	Phosphor Bronze	Silver
Terminal 5	Phosphor Bronze	Silver
Terminal 4	Phosphor Bronze	Silver
Terminal 3	Phosphor Bronze	Silver
Terminal 2	Phosphor Bronze	Silver
Terminal 1	Phosphor Bronze	Silver
PAPT NAMF	MATERIAL	PLATING

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-3020
APPROVED		SIZE:	A4	DWG NO.:	X-PJ-3020
		SCALE	N/A	PAGE	1/1
		REVISION			A1

1

2

3

4