
1N4001 - 1N4007, BY133

1.0 AMP. Silicon Rectifiers



DO-41

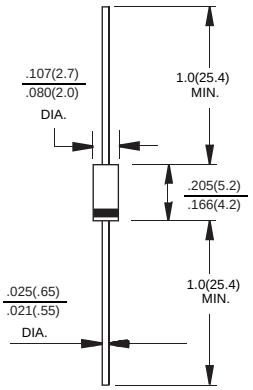

Dimensions in inches and (millimeters)

Features

- ✧ High efficiency, Low VF
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Low power loss
- ✧ Easily cleaned with Freon, Alcohil, Isopropanop and similar solvents

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 260 °C /10 seconds/.375",(9.5mm) lead lengths at 5 lbs.,(2.3kg) tension
- ✧ Weight: 0.35 gram

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	1N 4001	1N 4002	1N 4003	1N 4004	1N 4005	1N 4006	1N 4007	BY 133	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	1300	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	910	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	1300	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @T_A = 75 °C	$I_{(AV)}$	1.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	30								A
Maximum Instantaneous Forward Voltage @1.0A	V_F	1.0								V
Maximum DC Reverse Current @ T_A=25 °C at Rated DC Blocking Voltage @ T_A=125 °C	I_R	5.0 50								uA uA
Maximum Full Load Reverse Current ,Full Cycle Average .375"(9.5mm) Lead Length @T_A=75 °C	HT_{IR}	30								uA
Typical Junction Capacitance (Note 1)	Cj	10								pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	65								°C/W
Operating and Storage Temperature Range	T_J ,T_{STG}	-65 to +150								°C

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.
2. Mount on Cu-Pad Size 5mm x 5mm on P.C.B.

1N4001 - 1N4007, BY133

1.0 AMP. Silicon Rectifiers

RATINGS AND CHARACTERISTIC CURVES (1N4001 THRU 1N4007/BY133)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

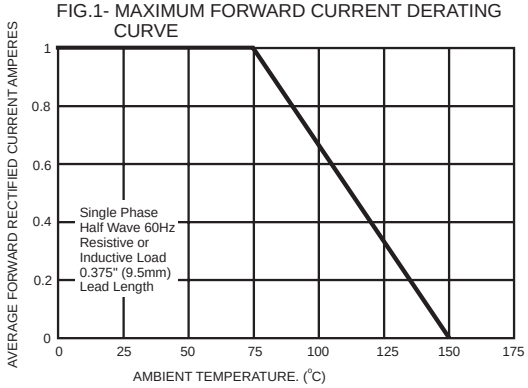


FIG.2- TYPICAL REVERSE CHARACTERISTICS

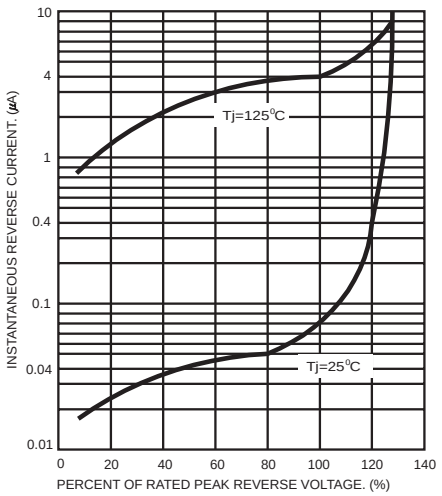


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

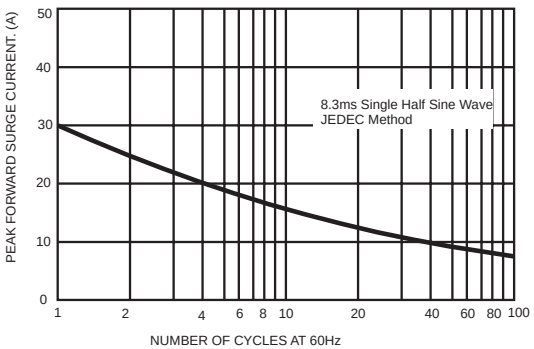


FIG.4- TYPICAL JUNCTION CAPACITANCE


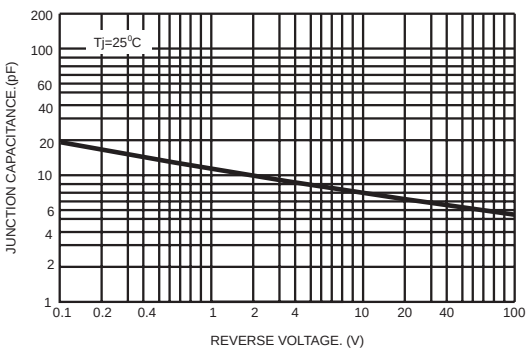


FIG.5- TYPICAL FORWARD CHARACTERISTICS

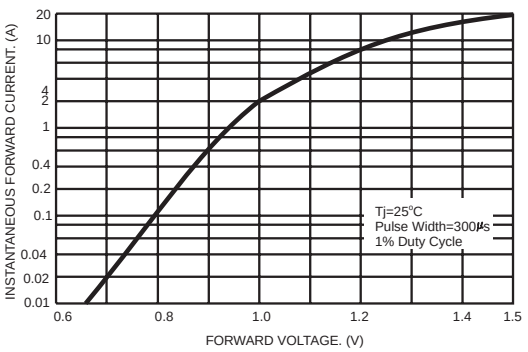

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-41	5000/AMMO	50000	42X28X31	14.00	12.00