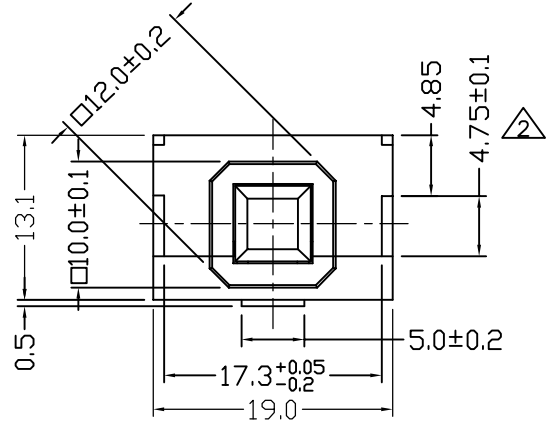
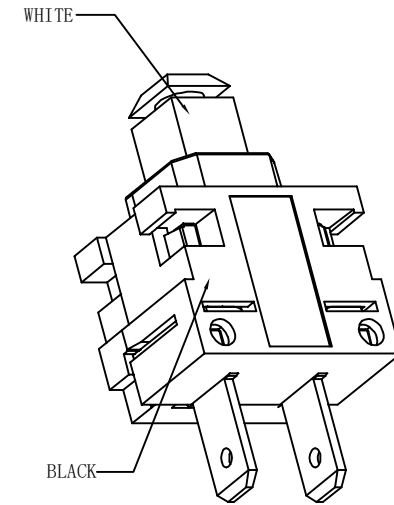
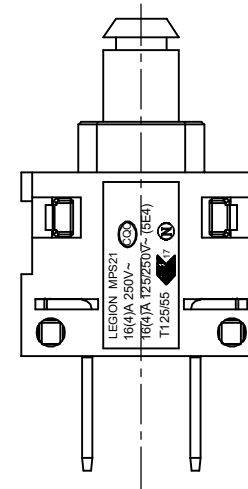
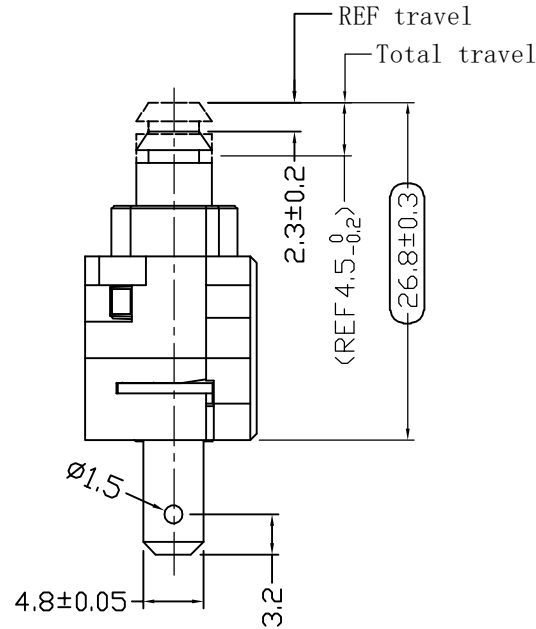
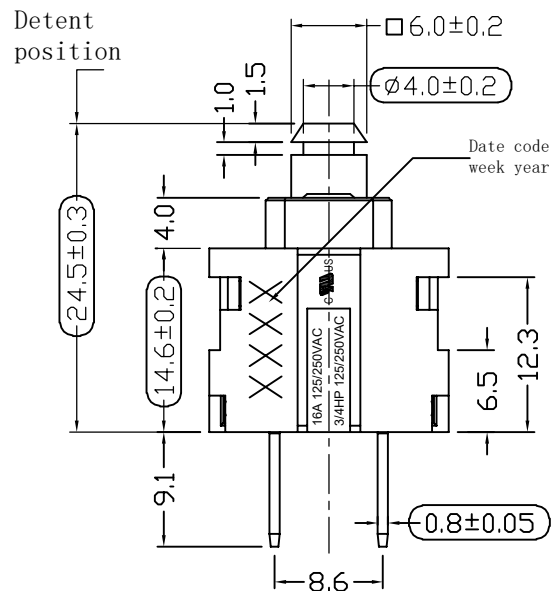


NOTES:

1. Circuit: ON/OFF
2. Operation force: 800±300gf
3. Rating: 16A 125/250VAC 3/4HP 125/250VAC (CUL)
16(4)A 125/250V~ T125/55 5E4 (ENEC17;NEMKO;CB)
16(4)A 250~ T125/55 1E4 (CQC)
4. Contact resistance: <30mΩ
5. Insulation resistance: >100MΩ (500VDC between open contacts)
6. Dielectric strength: >1500Vac 0.5mA 1 minute
7. Actuator color: WHITE
Housing color: BLACK

品名	备注
MPS21-WBBDD-R	无周期
MPS21-WBBDD-R D/C	印周期

				DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN		MM		
				RANGE	TOLERANCE					SCALE		NO		
				20≤	±0.40	MAT'L		***						
	5. 6→4. 75 2026. 06. 03			10~20	±0.30	 legion-switch.com 东莞市六钧电子五金有限公司				MATERIAL NO.		DRAWING NO.	REV.	
	增加品名 2024. 08. 14			≤10	±0.20					MPS21—WBBDD—R*		WIF117005	A2	
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1'									