

1

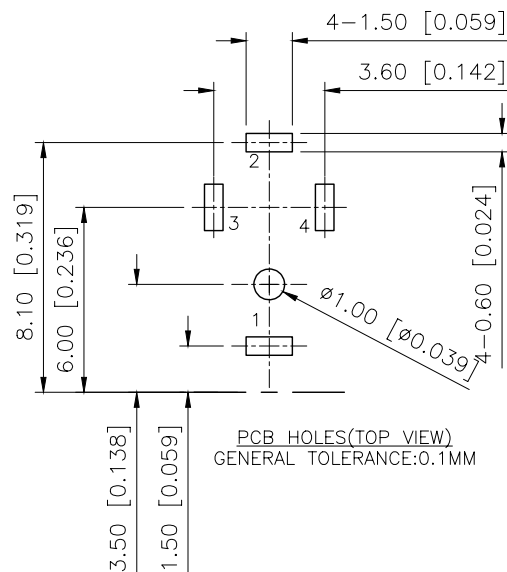
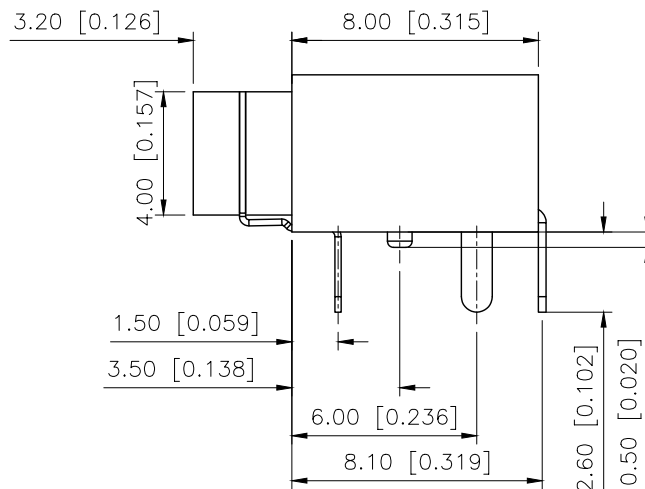
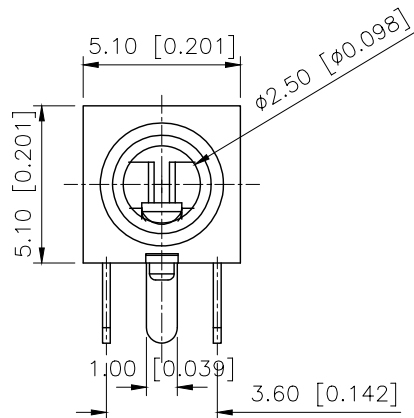
2

3

4

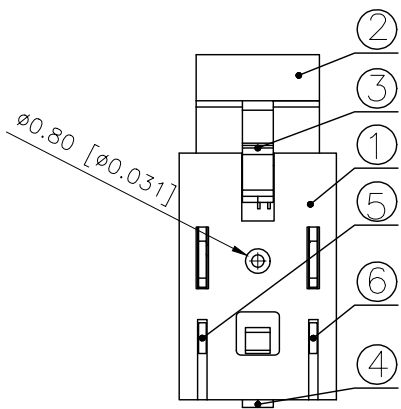

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.25	阿树

PCB HOLES(TOP VIEW)
GENERAL TOLERANCE:0.1MM

NOTES:

- 1.Electrical characters:
1-1.Rating:DC 30V 0.5A;
1-2.Contact Resistance:<30mΩ;
1-3.Insulation Resistance:>100MΩ DC500V;
1-4.Withstanding Voltage:AC 500V 1min;
1-5.LIFE:5.000CYCLES;
2.Mechanical characteristics:
2-1.Insertion&Extraction Force:3~30N;
2-2.Operating Temperature:-30°C~+70°C;



⑤	Terminal 4	1	Manganese steel(t=0.25)	SnSb PLATED
④	Terminal 3	1	Manganese steel(t=0.25)	SnSb PLATED
③	Terminal 2	1	Manganese steel(t=0.25)	SnSb PLATED
②	Axle sleeve	1	H59	CuSb PLATED
①	Housing	1	PA66	Black
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-210B
APPROVED		SIZE:	A4	DWG NO.:	PJ-210B

1

2

3

4