
D882

TO-252-2L Bipolar Transistor(NPN)

FEATURES


- Power Dissipation

TO-252-2L



1. BASE
2. COLLECTOR
3 .EMITTER

Equivalent Circuit



MAXIMUM RATINGS (T_a=25℃ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	30	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	3	A
P_C	Collector Power Dissipation	1.25	W
T_J,T_{stg}	Operation Junction and Storage Temperature Range	-55-150	℃

ELECTRICAL CHARACTERISTICS (T_a=25℃ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V(BR)_{CBO}$	I_C = 100μA, I_E=0	40			V
Collector-emitter breakdown voltage	$V(BR)_{CEO}$	I_C = 10mA, I_B=0	30			V
Emitter-base breakdown voltage	$V(BR)_{EBO}$	I_E= 100μA, I_C=0	6			V
Collector cut-off current	I_{CBO}	V_{CB}= 40 V, I_E=0			1	μA
Collector cut-off current	I_{CEO}	V_{CE}= 30 V, I_B=0			10	μA
Emitter cut-off current	I_{EBO}	V_{EB}= 6 V, I_C=0			1	μA
DC current gain	h_{FE}	V_{CE}= 2 V, I_C= 1A	60		400	
Collector-emitter saturation voltage	$V_{CE\ (sat)}$	I_C= 2A, I_B= 0.2 A			0.5	V
Base-emitter saturation voltage	$V_{BE\ (sat)}$	I_C= 2A, I_B= 0.2 A			1.5	V
Transition frequency	f_T	V_{CE}= 5V, I_C=0.1A f =10MHz		90		MHz

CLASSIFICATION OF h_{FE}


Rank	R	O	Y	GR
Range	60-120	100-200	160-320	200-400

D882


TO-252-2L Bipolar Transistor(NPN)

Typical Characteristics


Static Characteristic

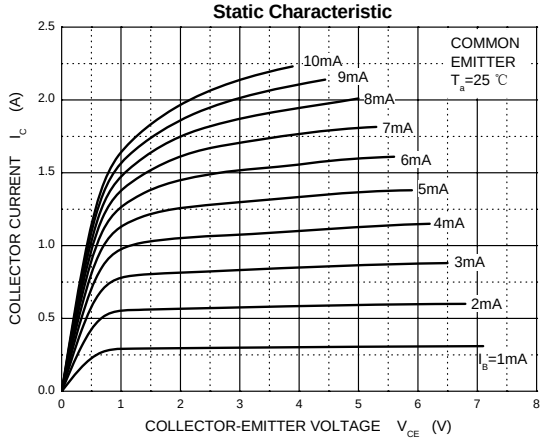


h_{FE} —— I_C

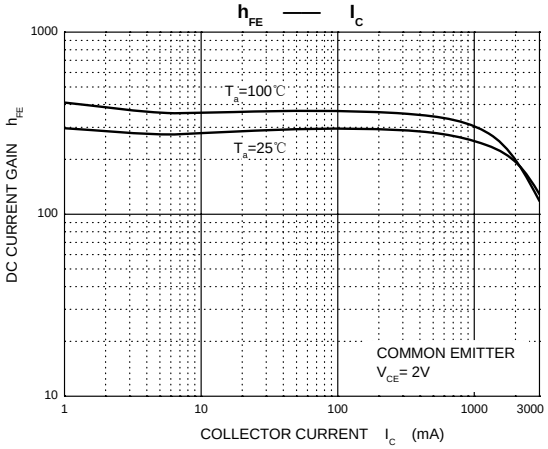


V_{CEsat} —— I_C

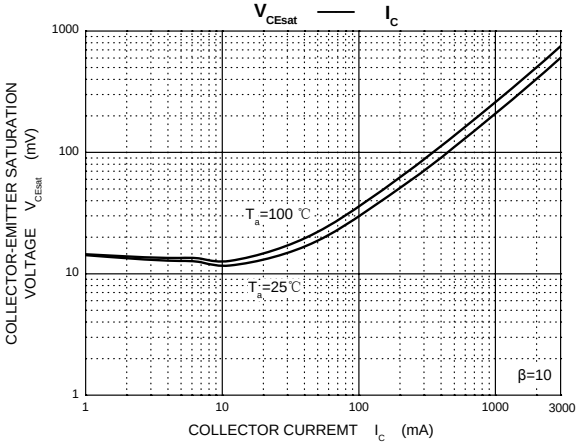


V_{BEsat} —— I_C

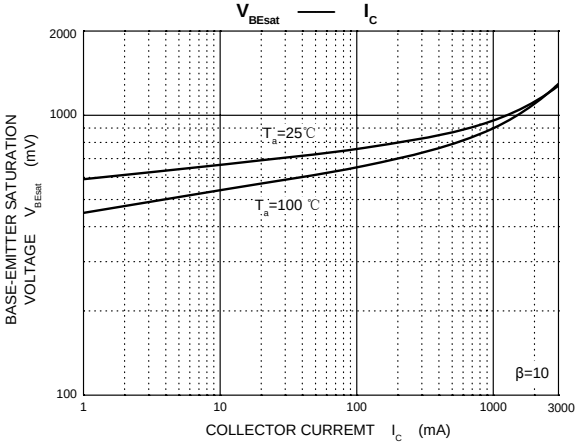


I_C —— V_{BE}

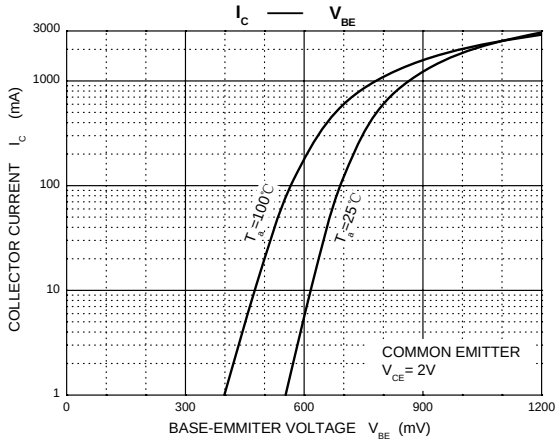

C_{ob}/C_{ib} —— V_{CB}/V_{EB}

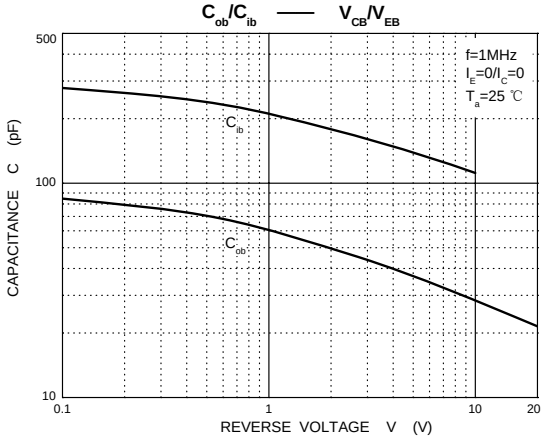


P_C —— T_a

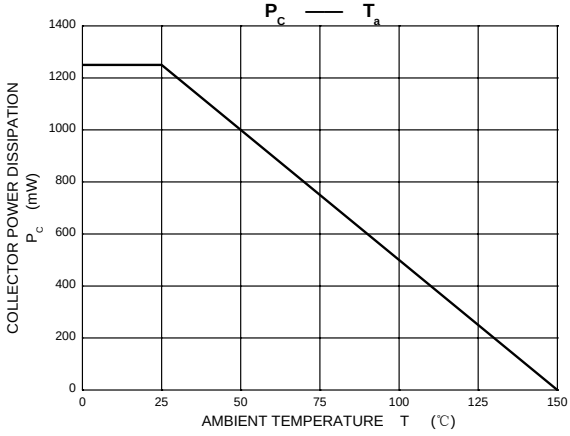

D882


TO-252-2L Bipolar Transistor(NPN)

TO-252-2L Package Outline Dimensions

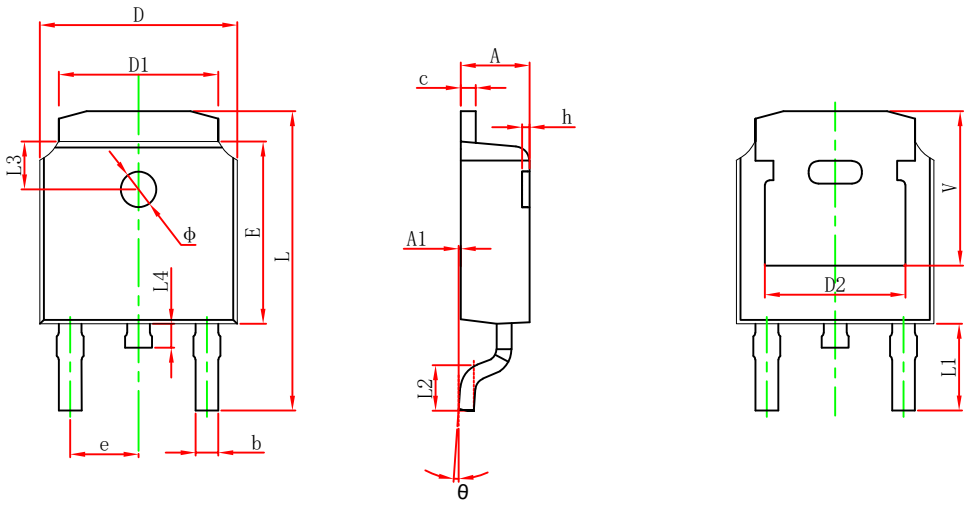

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.382	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	

TO-252-2L Suggested Pad Layout

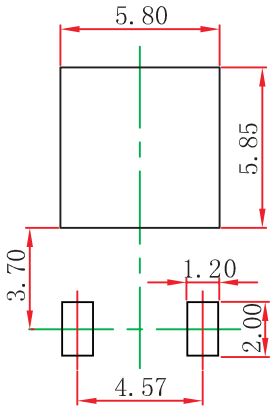

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

Packge	Packing	Box Size L×W×H(mm)	Quatity(pcs/box)	Carton Size L×W×H(mm)	Quatity(pcs/carton)
TO-252	80pcs/Tube	560×150×50	4000	570×290×180	40000
TO-252	2500pcs/Reel	335×335×40	2500	370×370×440	12500/25000