
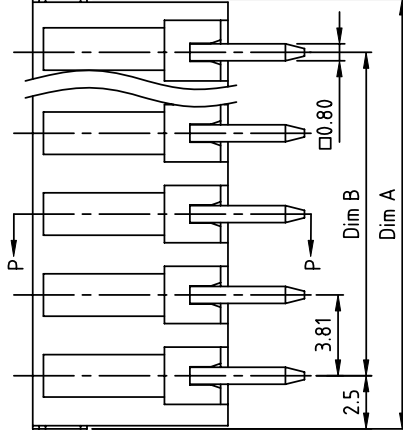
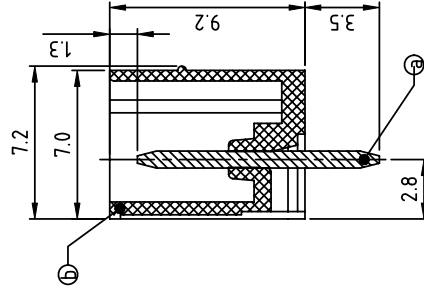
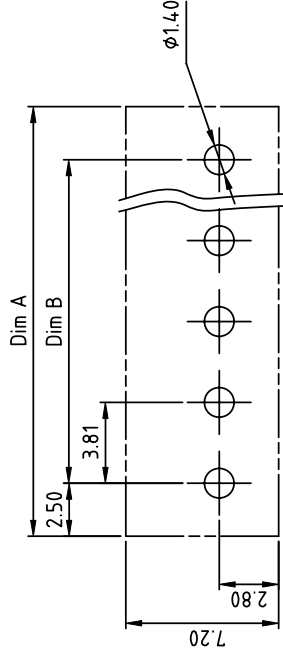


PRODUCT NUMBER	PITCH
00xx32x000J0G	3.81 mm

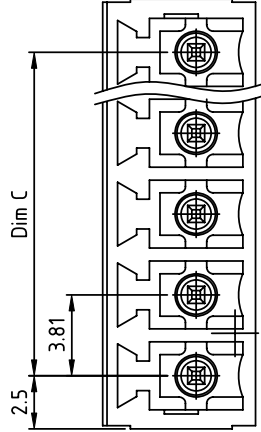


RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:

- Item a Male contact pin: Copper Tin plated
- Item b Terminal housing: Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 300V/300V
- Current rating: 10A/10.5A
- Withstanding Voltage: 1.6 KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: 

cULus /VDE

DIMENSION

Dim A	(N-1)×3.81+5.0
Dim B&C	(N-1)×3.81

N= number of poles

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

PART NO.: 00 XX 32 X 0 00J0 G

- No. of poles
- 02 2 poles
 - 03 3 poles
 -
 - 24 24 poles
- Body Color
- 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7035/D)
 - 9 White(RAL1102)
 - C Green(RAL6018/U)
- RoHS compliant (lead=4%)
In copper Alloy

mat'l. code		surface	tolerance	projection	product family	terminal block
litr	ecn no/dr	date	ASME Y14.5 unless otherwise specified		title	
			angles X±1°	MM	TERMINAL BLOCK	
			X.X±0.3	scale	PLUGGABLE SOCKET,VERTICAL	
			X.XX±0.1			
			dr HANKE FENG 032714			dwg no sheet 1 of 1 size
			engr HANKE FENG 032714			A4
			chr SHI JUN 032714			00xx32x000J0G
			appd SHI JUN 032714			type CUSTOMER Drawing
sheet index	revision A	sheet 1				