



Description


The LM1084ISX-xx/NOPB is a low dropout three terminal regulator with 5A output current capability.

The output voltage is adjustable with the use of a resistor divider or fixed 1.5V, 1.8V, and 3.3V.

Dropout is guaranteed at a maximum of 1.5V at maximum output current. Its low dropout voltage and fast transient response make it ideal for low voltage microprocessor applications. Internal current and thermal limiting provides protection against any overload condition that would create excessive junction temperatures.

Features

- Dropout Voltage 1.4V at 5A Output Current.
- Fast Transient Response.
- Line Regulation typically at 0.015%
- Load Regulation typically at 0.1%.
- Internal Thermal and Current Limiting.
- Adjustable Output Voltage or Fixed 1.5V, 1.8V, 3.3V.

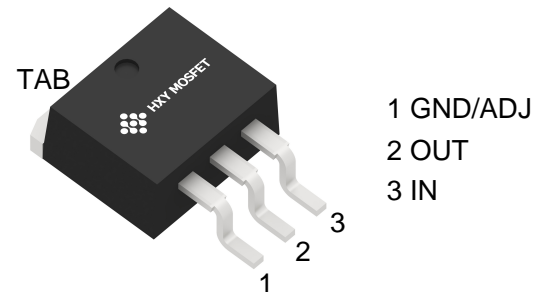

TO-263-3L

Application


- Mother Board I/O Power Supplies.
- Microprocessor Power Supplies.
- High Current Regulator.
- Post Regulator for Switching Supply.

Pin Configuration

- **ND (Adj.)** : Power Ground (Providing $V_{REF} = 1.25V$ (typ.) for adjustable V_{OUT} . $V_{REF} = V_{OUT} - V_{ADJ}$ and $I_{ADJ} = 55\mu A$ (typ.))
- **Output** :Adjustable output voltage
- **Input** :Power input



Block Diagram

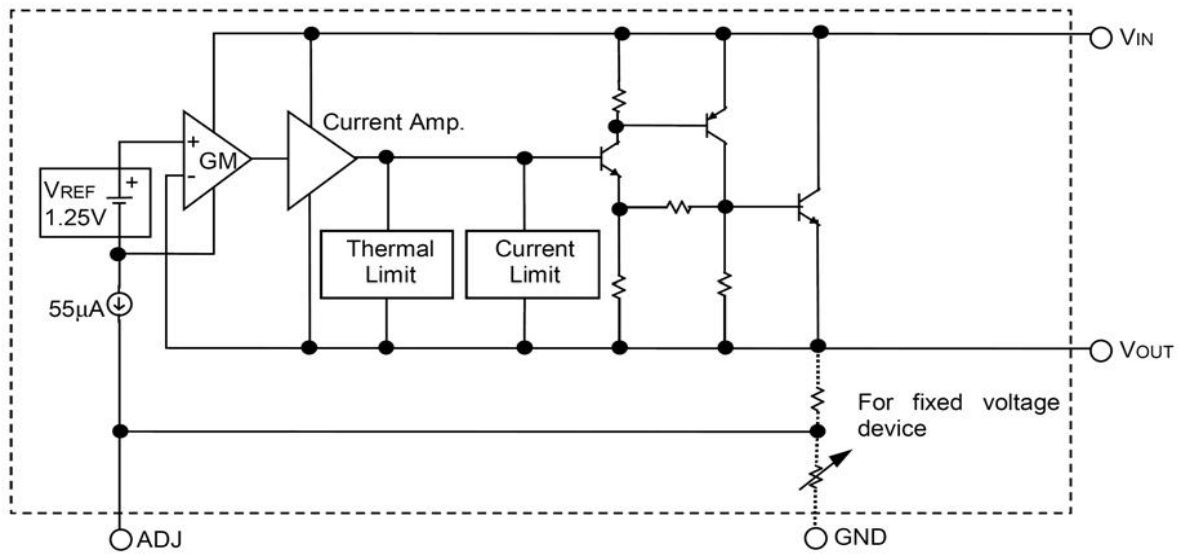

Ordering Information

Package Marking	Output Voltage	Package Type
LM1084ISX-ADJ/NOPB	Adj.	TO-263-3L
LM1084ISX-1.5/NOPB	1.5V	TO-263-3L
LM1084ISX-1.8/NOPB	1.8V	TO-263-3L
LM1084ISX-2.5/NOPB	2.5V	TO-263-3L
LM1084ISX-3.3/NOPB	3.3V	TO-263-3L
LM1084ISX-5.0/NOPB	5.0V	TO-263-3L



Absolute Maximum Ratings (Ta=25°C) *

Characteristics	Value	Unit
Vin pin to ADJ/GND pin	15	V
Thermal Resistance Junction to Case,θJC	3	°C/W
Thermal Resistance Junction to Ambient,θJA	60	°C/W
Lead Temperature (Soldering,10 Seconds)	260	°C
Storage Temperature	-65 ~ +150	°C

Recommended Operating Conditions

Characteristics	Value	Unit
Vin pin to ADJ/GND pin	12	V
Operating Junction Temperature	0 ~ 125	°C


Electrical Characteristics (unless otherwise specified :Vin=5V,T=25°C
Io=10mA)

Characteristics	Symbol	Test conditions	Min	Typ	Max	Unit
Reference voltage	VREF	B1084(Adj.) T _J =25°C	1.238	1.25	1.262	V
		B1084(Adj.) 0°C ≤ T _J ≤ 125°C	1.225	1.25	1.275	
Output Voltage	B1084-1.5	V _{IN} =5V	1.48	1.5	1.52	V
	B1084-1.8		1.78	1.8	1.82	
	B1084-3.3		3.27	3.3	3.33	
Line regulation	REG (LINE)	4.75 ≤ V _{IN} ≤ 5.25, T _J =25°C		0.015	0.2	%
		0°C ≤ T _J ≤ 125°C		0.035	0.2	
Load regulation	REG (LOAD)	T _J =25°C		0.1	0.3	%
		0°C ≤ T _J ≤ 125°C		0.2	0.4	



Dropout voltage	V_D	$V_{OUT}, V_{REF} = 1\%,$ $10mA \leq I_o \leq 5A$ $0^\circ C \leq T_J \leq 125^\circ C$		1.3	1.5	V
Current limit	I_{CL}	$4.75 \leq V_{IN} \leq 5.25$ $0^\circ C \leq T_J \leq 125^\circ C$	6.0	7.5		A
Adjust pin current	I_{ADJ}	$4.75 \leq V_{IN} \leq 5.25$ $10mA \leq I_o \leq 5A$ $0^\circ C \leq T_J \leq 125^\circ C$		55	120	μA
Temperature stability		$I_o = 0.5A$ $0^\circ C \leq T_J \leq 125^\circ C$		0.5		%
Adjusted pin current change	I_{ADJ}	$4.75 \leq V_{IN} \leq 5.25$ $10mA \leq I_o \leq 5A$ $0^\circ C \leq T_J \leq 125^\circ C$		0.2	5.0	μA
Minimum load current	I_o	$0^\circ C \leq T_J \leq 125^\circ C$		5	10	mA
RMS output noise	V_N	$10Hz \leq f \leq 10kHz$		0.003 of V_{out}		%
Ripple rejection ratio	R_A	120Hz input ripple, 60 $C_{OUT} = 25\mu F$ $V_{IN} -$ $V_{OUT} = 3V$	60	72		dB

Application Circuit

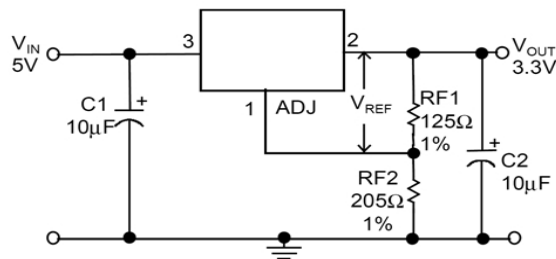


Adjustable Voltage Regulator

$$V_{REF} = V_{OUT} - V_{ADJ} = 1.25V \text{ (typ.)}$$

$$V_{OUT} = V_{REF} \times (1 + RF2/RF1) + I_{ADJ} \times RF2$$

$$I_{ADJ} = 55\mu A \text{ (typ.)}$$





- (1) C1 needed if device is far away from filter capacitors.
- (2) C2 required for stability.

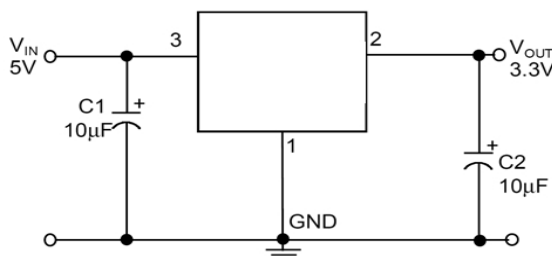

Fixed Voltage Regulator



Chara Cteristics Curve

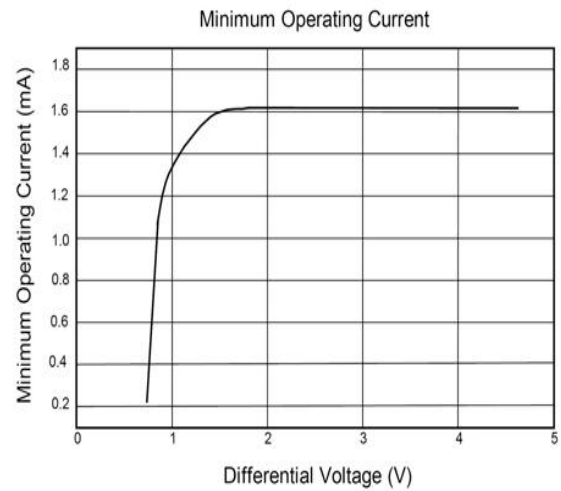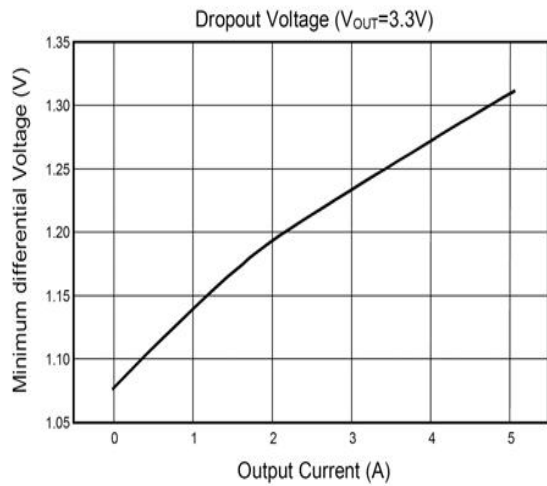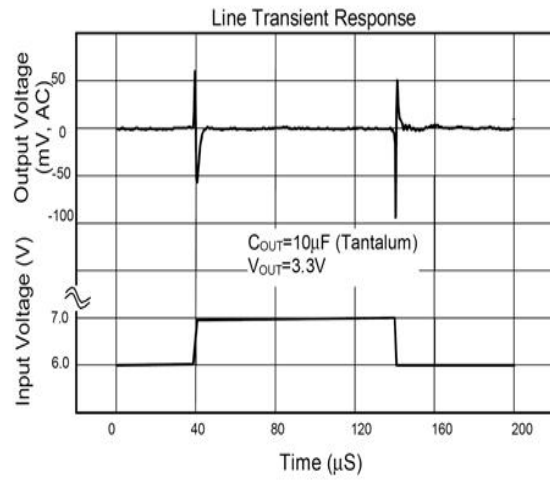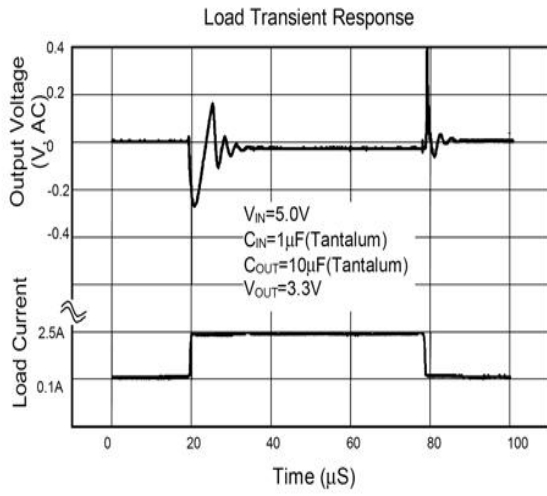




Outline Drawing

TO-263-3L

Unit: mm

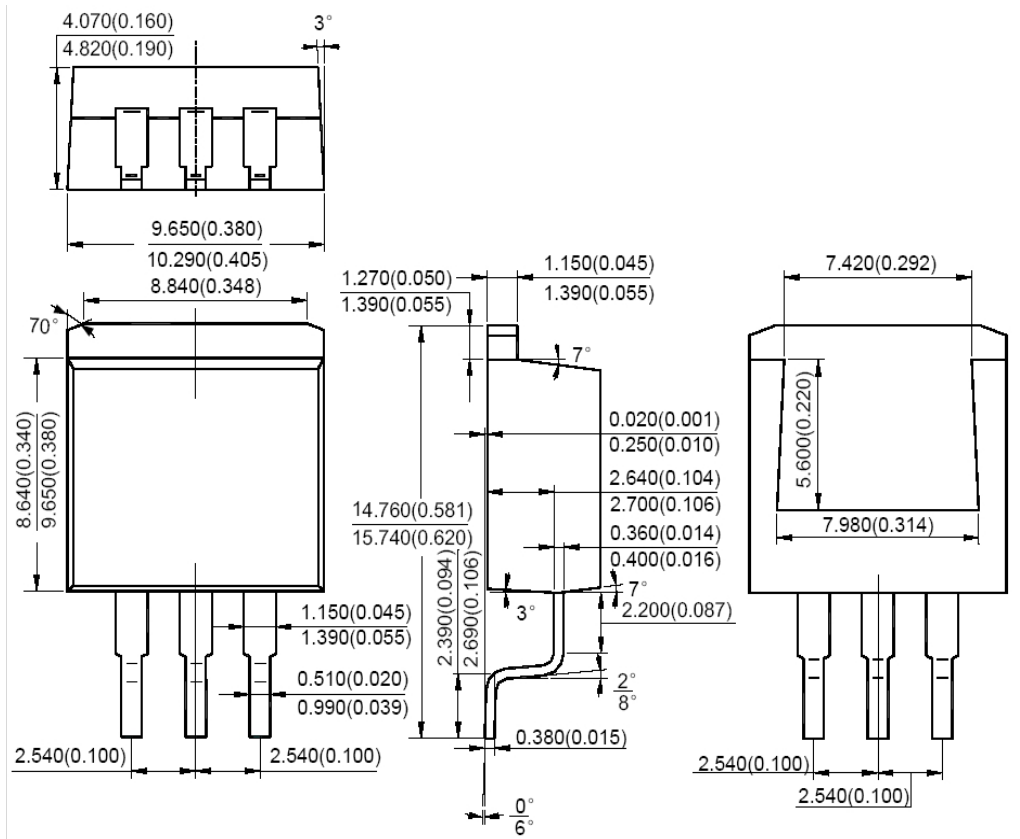



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.