





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2025.06.27	阿树
A2	ECN-P-2026041501	A2X5	产品材质及尺寸变更	2026.04.16	山楂

A

B

C

D

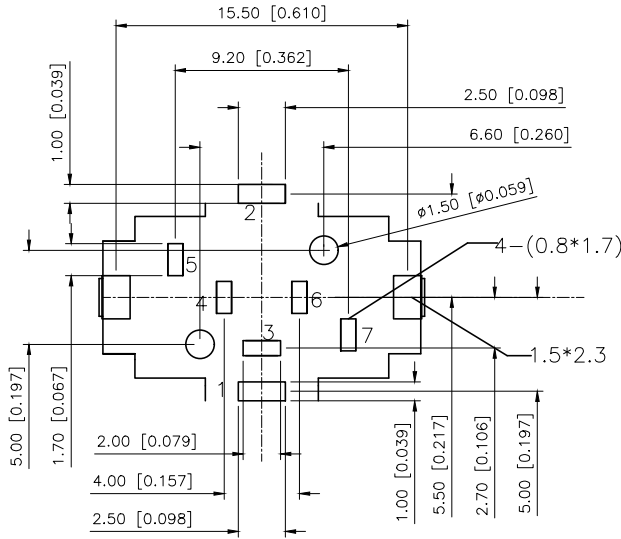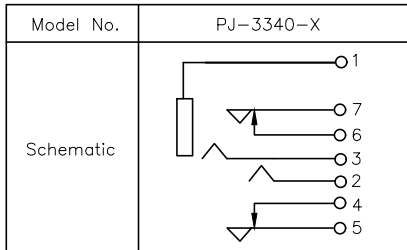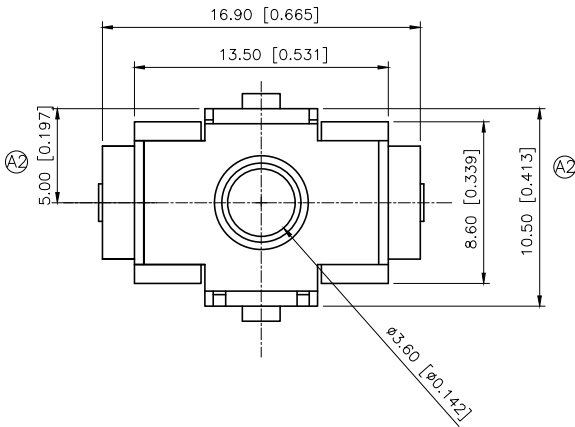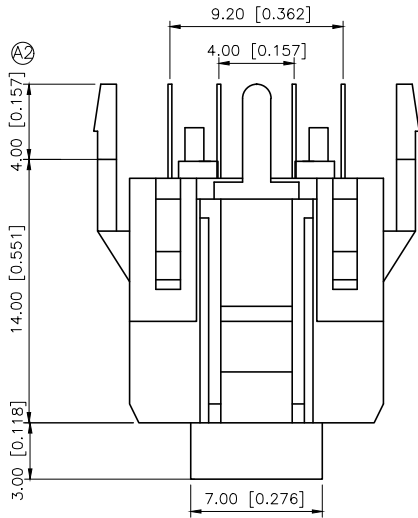

PCB LAYOUT

Specifications (规格):

- 1.Voltage rating (额定电压): DC 30V
- 2.Current rating (额定电流): 0.5A AC/DC
- 3.Withstanding voltage (耐压值): $\geq 500V$ AC/minute
- 4.Insulation resistance (绝缘电阻): $\geq 100M\Omega$ Min
- 5.Contact resistance (接触电阻): $\leq 30m\Omega$ Max
- 6.Mating cycles (使用寿命): 5000 cycles Min
- 7.Insertion and extraction force (插拔力): 3~20N

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	山楂	VIEW:		MODEL TYPE:	3.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-3340-2
APPROVED		SIZE:	A4	DWG NO.:	