
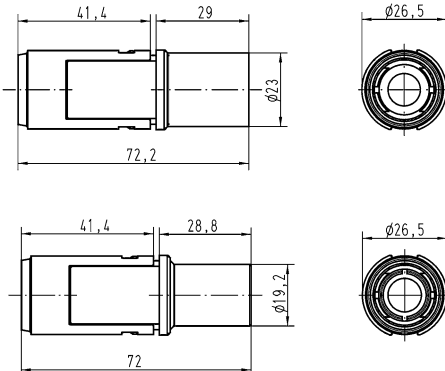

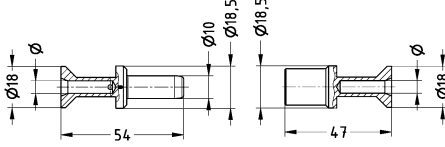



250 A 2.000 V 12 kV 3

Han  
HC

Identification	Conductor cross-section (mm <sup>2</sup> )	Part number		Drawing (dimensions in mm)																												
		Male	Female																													
Han® HC Modular, 250, Crimp termination  Please order crimp contacts separately.	10 ... 70	09 11 001 3021	09 11 001 3121																													
TC 250, Crimp contact, Contact surface: Silver plated 	10 16 25 35 50 70	09 11 000 6184 09 11 000 6185 09 11 000 6126 09 11 000 6127 09 11 000 6128 09 11 000 6129	09 11 000 6284 09 11 000 6285 09 11 000 6226 09 11 000 6227 09 11 000 6228 09 11 000 6229	 <table border="1" data-bbox="965 1220 1412 1422"> <thead> <tr> <th>Conductor cross-section</th> <th>Tool identification</th> <th>Stripping length A</th> <th>Ø</th> </tr> </thead> <tbody> <tr> <td>10 mm<sup>2</sup></td> <td>6</td> <td>22 mm</td> <td>4.3 mm</td> </tr> <tr> <td>16 mm<sup>2</sup></td> <td>8</td> <td>22 mm</td> <td>5.5 mm</td> </tr> <tr> <td>25 mm<sup>2</sup></td> <td>10</td> <td>22 mm</td> <td>7 mm</td> </tr> <tr> <td>35 mm<sup>2</sup></td> <td>12</td> <td>22 mm</td> <td>8.45 mm</td> </tr> <tr> <td>50 mm<sup>2</sup></td> <td>14</td> <td>22 mm</td> <td>10.25 mm</td> </tr> <tr> <td>70 mm<sup>2</sup></td> <td>16</td> <td>22 mm</td> <td>11.75 mm</td> </tr> </tbody> </table> <p>for stranded wire according to IEC 60 228 Class 5</p> <p>Crimp zone acc. to DIN 46235</p>	Conductor cross-section	Tool identification	Stripping length A	Ø	10 mm <sup>2</sup>	6	22 mm	4.3 mm	16 mm <sup>2</sup>	8	22 mm	5.5 mm	25 mm <sup>2</sup>	10	22 mm	7 mm	35 mm <sup>2</sup>	12	22 mm	8.45 mm	50 mm <sup>2</sup>	14	22 mm	10.25 mm	70 mm <sup>2</sup>	16	22 mm	11.75 mm
Conductor cross-section	Tool identification	Stripping length A	Ø																													
10 mm <sup>2</sup>	6	22 mm	4.3 mm																													
16 mm <sup>2</sup>	8	22 mm	5.5 mm																													
25 mm <sup>2</sup>	10	22 mm	7 mm																													
35 mm <sup>2</sup>	12	22 mm	8.45 mm																													
50 mm <sup>2</sup>	14	22 mm	10.25 mm																													
70 mm <sup>2</sup>	16	22 mm	11.75 mm																													
TC 250, Crimp contact, PE contact, Contact surface: Silver plated 	16 35	09 11 000 6190 09 11 000 6104	09 11 000 6290 09 11 000 6204	