



High Voltage BIMOSFET™ Monolithic Bipolar MOS Transistor

N-Channel, Enhancement Mode
MOSFET compatible



$$\begin{aligned} I_{C25} &= 9 \text{ A} \\ V_{CES} &= 1600 \text{ V} \\ V_{CE(sat)} &= 4.9 \text{ V typ.} \\ t_{fi} &= 70 \text{ ns} \end{aligned}$$

TO-247 AD



G = Gate,
E = Emitter,

C = Collector,
TAB = Collector

Symbol	Conditions	Maximum Ratings	
V_{CES}	$T_J = 25^\circ\text{C}$ to 150°C	1600	V
V_{CGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GE} = 1 \text{ M}\Omega$	1600	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	$T_C = 25^\circ\text{C}$	9	A
I_{C90}	$T_C = 90^\circ\text{C}$	5	A
I_{CM}	$T_C = 25^\circ\text{C}$, 1 ms	10	A
SSOA (RBSOA)	$V_{GE} = 10 \text{ V}$, $T_{VJ} = 125^\circ\text{C}$, $R_G = 27 \Omega$, $V_{CE} = 0.8 \cdot V_{CES}$ Clamped inductive load, $L = 100 \mu\text{H}$	$I_{CM} = 12$	A
P_c	$T_C = 25^\circ\text{C}$	100	W
T_J		-55 ... +150	$^\circ\text{C}$
T_{JM}		150	$^\circ\text{C}$
T_{stg}		-55 ... +150	$^\circ\text{C}$
T_L	1.6 mm (0.063 in) from case for 10 s	300	$^\circ\text{C}$
M_d	Mounting torque	1.15	Nm
Weight		6	g

Features

- High Voltage BIMOSFET™
 - replaces high voltage Darlington's and series connected MOSFET's
 - lower effective $R_{DS(on)}$
- MOS Gate turn-on
 - drive simplicity
 - MOSFET compatible for 10V turn on gate voltage
- Monolithic construction
 - high blocking voltage capability
 - very fast turn-off characteristics
- International standard package JEDEC TO-247 AD
- Reverse conducting capability

Applications

- Flyback converters
- DC choppers
- Uninterruptible power supplies (UPS)
- Switched-mode and resonant-mode power supplies
- CRT deflection
- Lamp ballasts

Advantages

- Easy to mount with 1 screw (isolated mounting screw hole)
- Space savings
- High power density

Symbol	Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
BV_{CES}	$I_C = 0.25 \text{ mA}$, $V_{GE} = 0 \text{ V}$	1600		V
$V_{GE(th)}$	$I_C = 0.5 \text{ mA}$, $V_{CE} = V_{GE}$	3.5		5.5 V
I_{CES}	$V_{CE} = 0.8 \cdot V_{CES}$ $V_{GE} = 0 \text{ V}$		0.1	100 μA mA
I_{GES}	$V_{CE} = 0 \text{ V}$, $V_{GE} = \pm 20 \text{ V}$			$\pm 500 \text{ nA}$
$V_{CE(sat)}$	$I_C = I_{C90}$, $V_{GE} = 15 \text{ V}$ $T_J = 125^\circ\text{C}$	4.9 5.6		7 V V


Symbol	Conditions	Characteristic Values		
		(T _J = 25°C, unless otherwise specified)		
		min.	typ.	max.
C _{ies}	V _{CE} = 25 V, V _{GE} = 0 V, f = 1 MHz		550	pF
C _{oes}			36	pF
C _{res}			5	pF
Q _g	I _C = 5 A, V _{CE} = 600 V, V _{GE} = 10 V	34		nC
t _{d(on)}	Inductive load, T _J = 125°C I _C = I _{C90} , V _{GE} = 10 V, L = 100 μH, V _{CE} = 960 V, R _G = 27 Ω		140	ns
t _{ri}			200	ns
t _{d(off)}			120	ns
t _{fi}			70	ns
R _{thJC}				1.25 K/W
R _{thCK}			0.25	K/W

Reverse Conduction

(T_J = 25°C, unless otherwise specified)

Symbol	Conditions	min.	typ.	max.
V _F	I _F = I _{C90} , V _{GE} = 0 V		3.6	5

TO-247 AD Outline

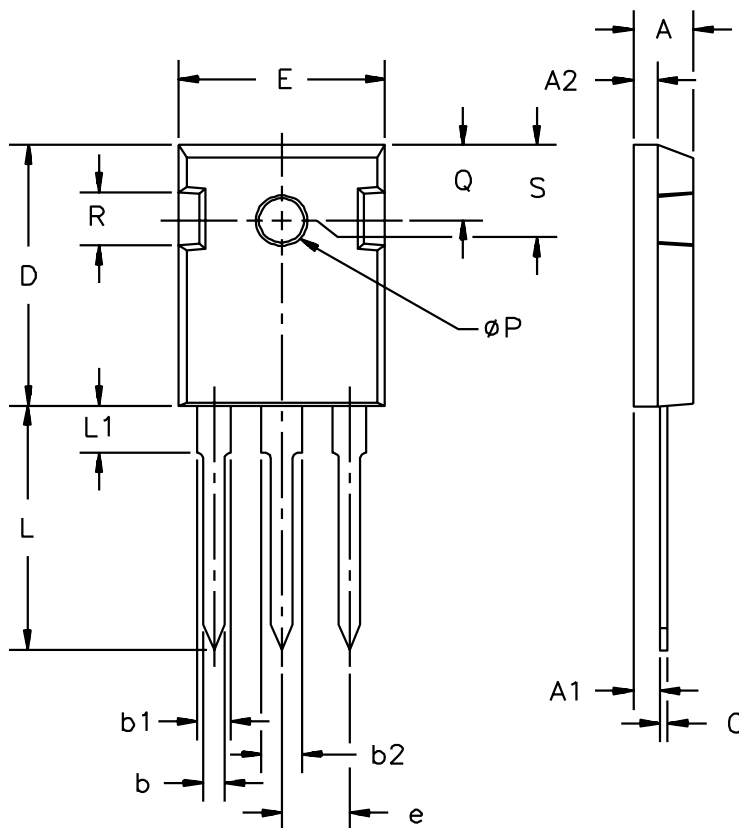

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

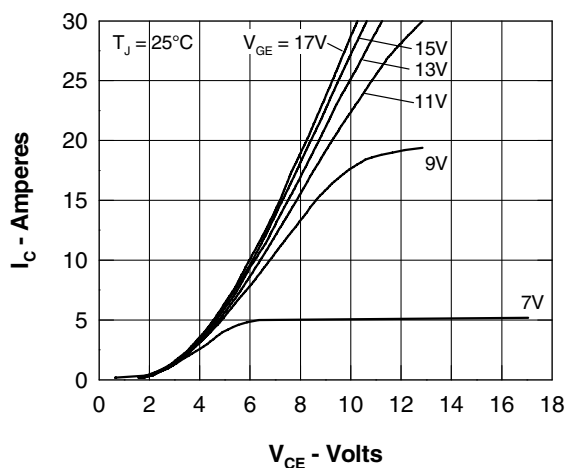


Fig. 1 Typ. Output Characteristics

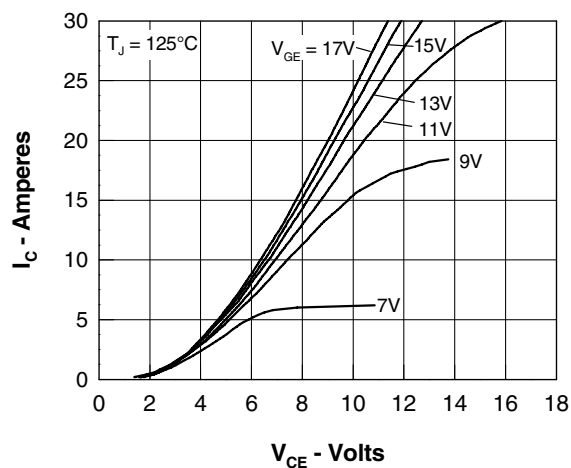


Fig. 2 Typ. Output Characteristics

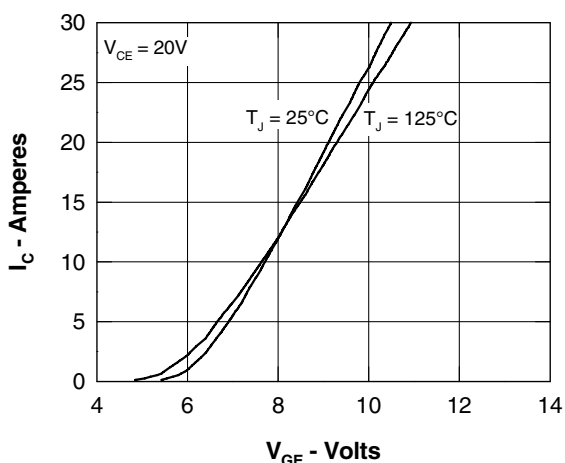


Fig. 3 Typ. Transfer Characteristics

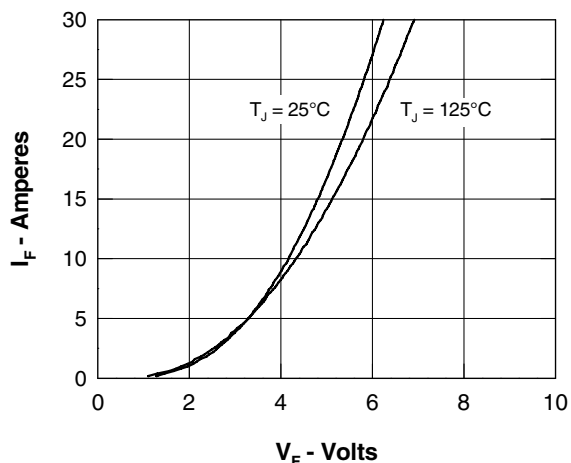


Fig. 4 Typ. Characteristics of Reverse Conduction

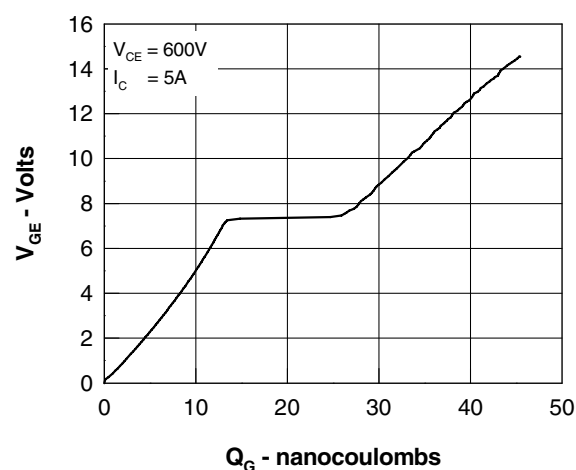


Fig. 5 Typ. Gate Charge characteristics

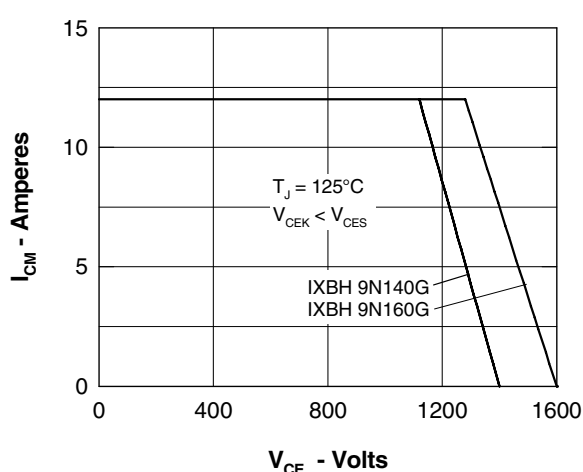


Fig. 6 Reverse Biased Safe Operating Area RBSOA

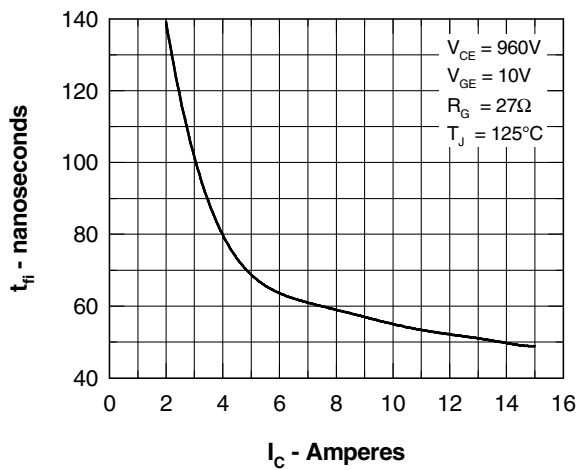


Fig. 7 Typ. Fall Time

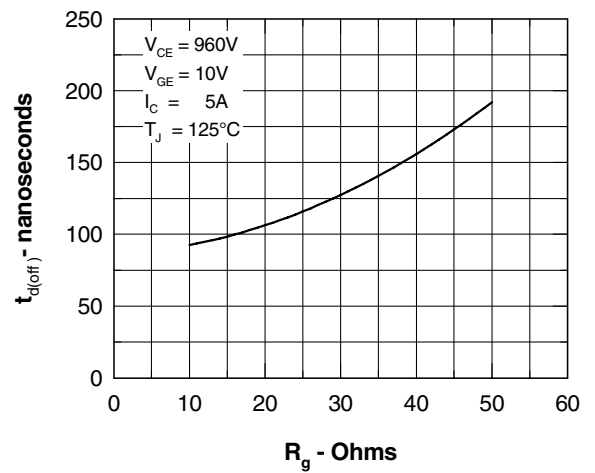


Fig. 8 Typ. Turn Off Delay Time

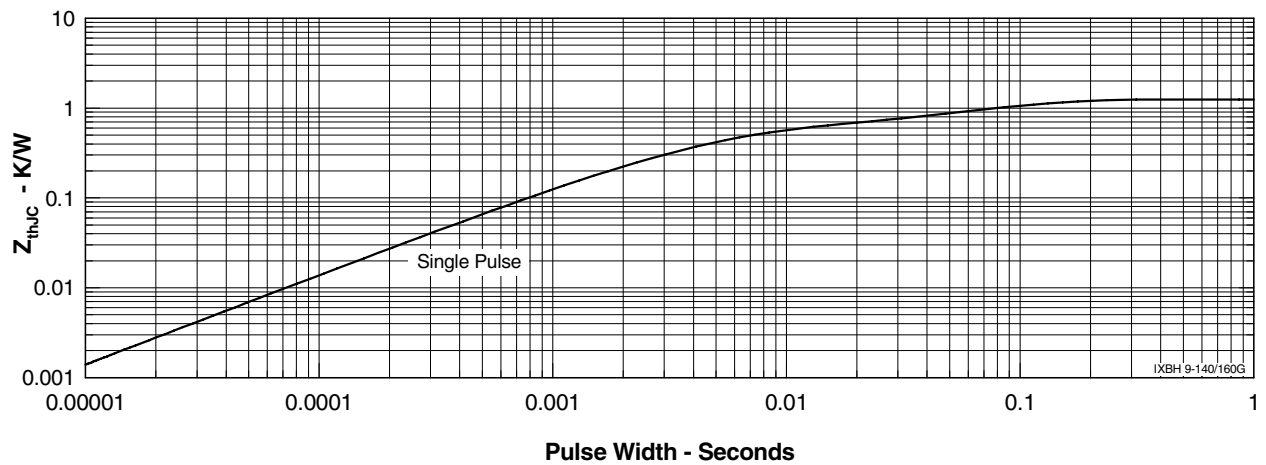


Fig. 9 Typ. Transient Thermal Impedance



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.