

Pitch:2.00x2.00mm(0.079 " x0.079 ")
Female Header Dual Rows With Post S.M.T Type

ELETE
—Professional Connecting Solution—
HFLDMXX Series


Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃


Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

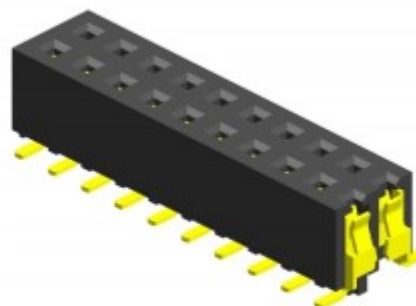

Mating with



HMLDSXX



HMLDSHXX




HMLDMHXX



HMLDR43



HMLDMXX





HMLDS43



HMLDPXX



HMLDRXX

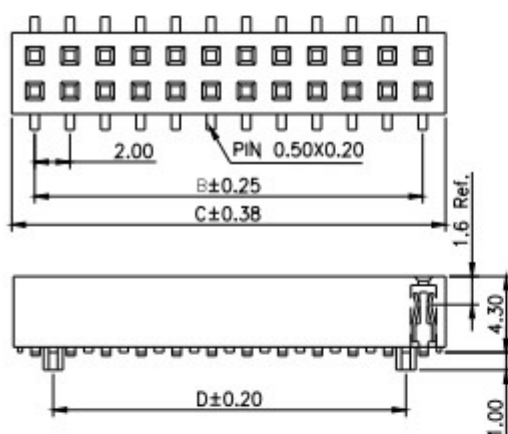

PS:Suggested Mating Pin Length:3.0~4.0mm

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	B	C	D		B	C	D		B	C	D		B	C	D
03	4.00	6.60	2.00	13	24.00	26.60	22.00	23	44.00	46.60	42.00	33	64.00	66.60	62.00
04	6.00	8.60	4.00	14	26.00	28.60	24.00	24	46.00	48.60	44.00	34	66.00	68.60	64.00
05	8.00	10.60	6.00	15	14.00	30.60	26.00	25	48.00	50.60	46.00	35	68.00	70.60	66.00
06	10.00	12.60	8.00	16	15.00	32.60	28.00	26	50.00	52.60	48.00	36	70.00	72.60	68.00
07	12.00	14.60	10.00	17	16.00	34.60	30.00	27	52.00	54.60	50.00	37	72.00	74.60	70.00
08	14.00	16.60	12.00	18	17.00	36.60	32.00	28	54.00	56.60	52.00	38	74.00	76.60	72.00
09	16.00	18.60	14.00	19	18.00	38.60	34.00	29	56.00	58.60	54.00	39	76.00	78.60	74.00
10	18.00	20.60	16.00	20	19.00	40.60	36.00	30	58.00	60.60	56.00	40	78.00	80.60	76.00
11	20.00	22.60	18.00	21	20.00	42.60	38.00	31	60.00	62.60	58.00				
12	22.00	24.60	20.00	22	21.00	44.60	40.00	32	62.00	64.60	60.00				