

Pitch: 2.00x2.00mm (0.079" x 0.079")
Pin Header Dual Rows Right Angle S.M.T Type

ELETE
—Professional Connecting Solution—
HMLDPXX Series

Specifications

Current Rating: 2.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
LCP/NL6T

All material RoHS & Reach Compliant
Halogen-free is available



Mating with




HFLDSXX






HFLDR63



HFLDMXX



HFLDS72

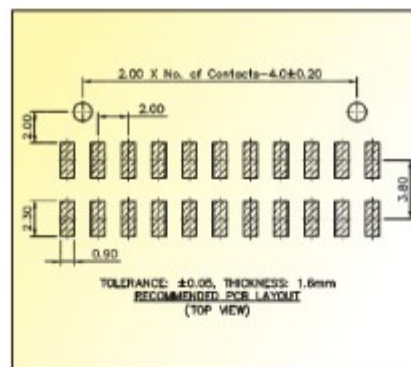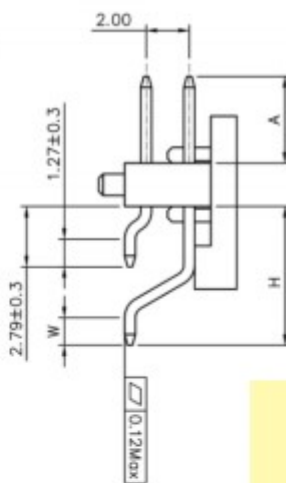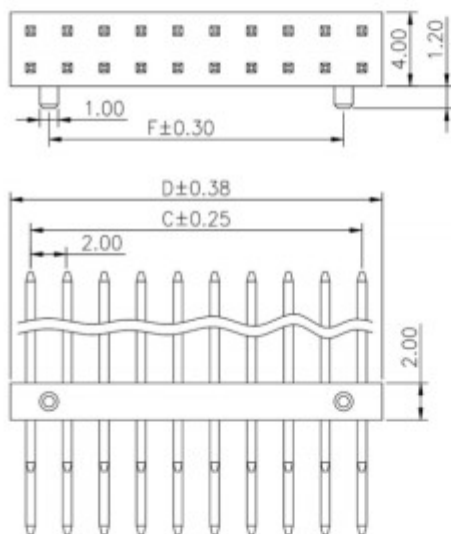

HFLDP63



HFLDR72



HFLDM51



HFLDR51

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D	F		C	D	F		C	D	F		C	D	F
03	4.00	6.20	2.00	09	16.00	18.20	14.00	15	28.00	30.20	26.00	21	40.00	42.20	38.00
04	6.00	8.20	4.00	10	18.00	20.20	16.00	16	30.00	32.20	28.00	22	42.00	44.20	40.00
05	8.00	10.20	6.00	11	20.00	22.20	18.00	17	32.00	34.20	30.00	23	44.00	46.20	42.00
06	10.00	12.20	8.00	12	22.00	24.20	20.00	18	34.00	36.20	32.00	24	46.00	48.20	44.00
07	12.00	14.20	10.00	13	24.00	26.20	22.00	19	36.00	38.20	34.00	25	48.00	50.20	46.00
08	14.00	16.20	12.00	14	26.00	28.20	24.00	20	38.00	40.20	36.00				