

1

2

3

4

A

B

C

D

A



B

C



D

REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	/
A1	N/A		图面升级整理图面	2025.06.04

Code-x	H
A	2.5
B	3.1
C	3.4
D	3.7
E	4.3
F	5.0

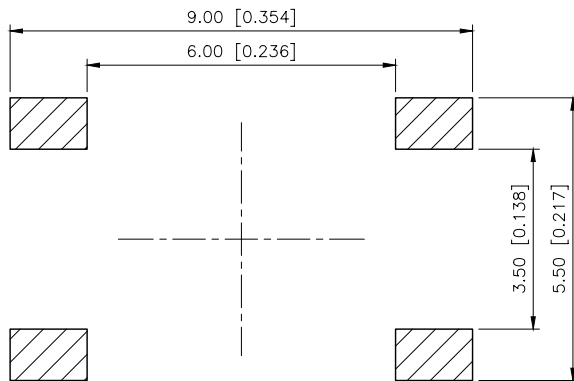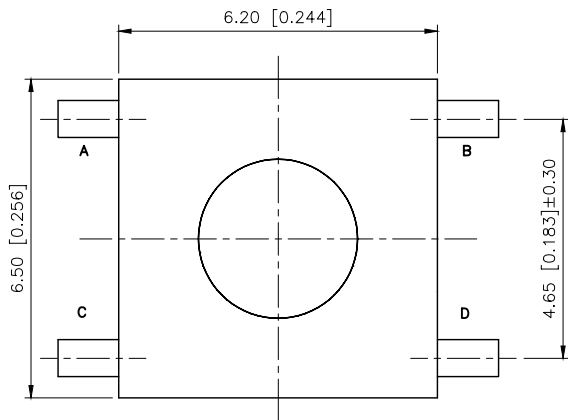


PCB LATOUT TOP VIEW

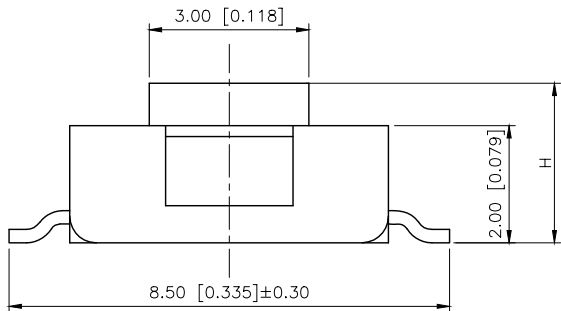

SPECIFICATION
Contact Rating: 50mA,12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100MΩ min.500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -30℃~+85℃
Storage Temp: -30℃~+80℃

PAPT NO	TS-1157-C-A
Operating Force	A:100gf B:160gf C:260gf
Height	Code-x



SCHEMATIC

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	TACT SWITCH
APPROVED		SIZE: A4	PART NO.: TS-1157-C-A
			DWG NO.: TS-1157-C-A

1

2

3

4