

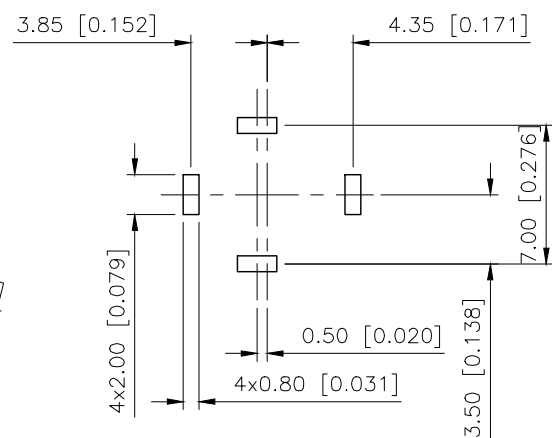
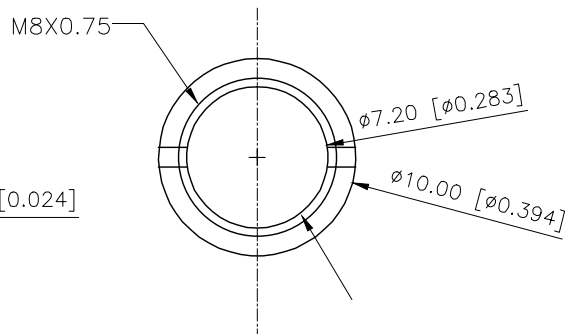
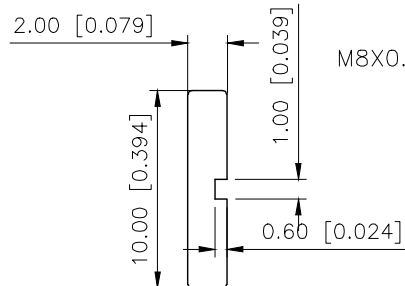
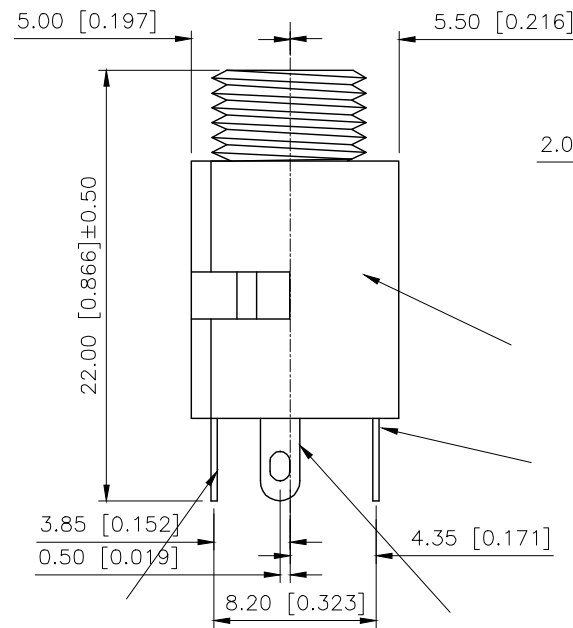
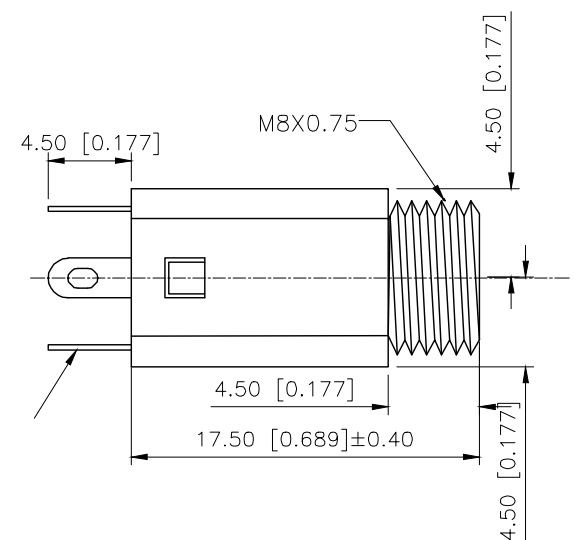


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2024.9.11	

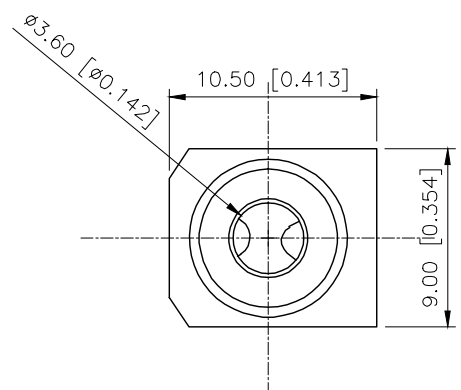

PCB LAYOUT TOP VIEW

SCHEMATIC

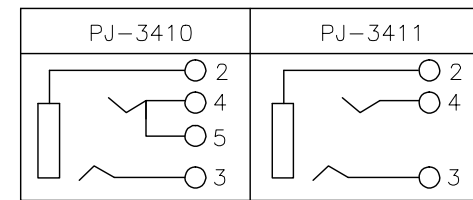

SPECIFICATIONS:
Rating 12V DC 1A
Contact resistance ≤30mΩ
Insulation resistance ≥50MΩ DC100V
Withstanding voltage AC 500V
R.M.A.FOR 1MINUTE
Plugging force 3~20N
Life test 5000 CYCLES

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN		VIEW:		MODEL TYPE:	3.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-3411
APPROVED		SIZE:	A4	DWG NO.:	