
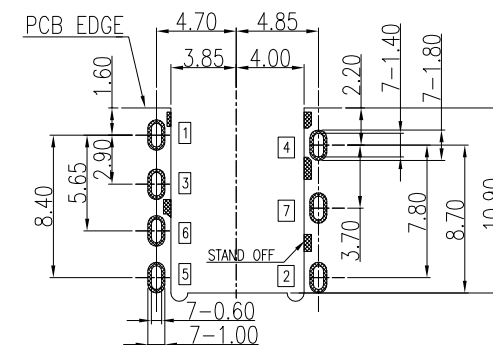

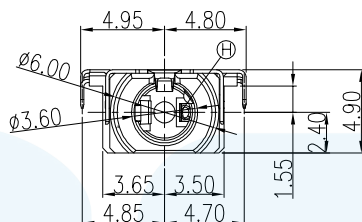
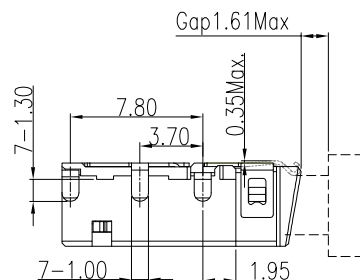




ZONE	E C N . N O .	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2023.11.24



RECOMMENDED P.C.B LAYOUT($t=1.0\text{mm}$)
TOP VIEW (TOLRANCE: ± 0.05)

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 0.5 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial),
100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial),
100 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 3.0Kgf MAX.;
 - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -30°C~+80°C.



3D VIEW

DATE CODE说明:

“YY”代表年份。19代表2019年，20代表2020年... 依此类推。

TABLE 1:




I	Separator	1	HIGH TEMP	BLACK,UL 94V-0	
H	Housing	1	HIGH TEMP	BLACK,UL 94V-0	
G	Contact_6	6	Phosphor bronze	Au 1u" Min On Contact And Solder Tail Area,50u" Nickel underPlated	T=0.20mm
F	Contact_5	5	Phosphor bronze		T=0.20mm
E	Shell	7	Phosphor bronze	50u" Ni Min Plated	T=0.20mm
D	Contact_4	4	Phosphor bronze		T=0.20mm
C	Contact_3	3	Phosphor bronze	Au 1u" Ni On contact preg Plated Matte 50u" min on solder tail, Nickel	T=0.20mm
B	Contact_2	2	Phosphor bronze	50u" Min underplated.	T=0.20mm
A	Contact_1	1	Phosphor bronze		T=0.20mm
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

PLUG SPEC	SCHEMATIC	AFTER INSERT SCHEMATIC



LZG INDUSTRIAL CO. LTD

 LZG INDUSTRIAL CO. LTD					DRAWING:	林生财	DATE:	2023.11.24	SCALE	1:1
					CHECK:	李宏鑫	DATE:	2023.11.24	MATERIAL	*
PART NAME	ø3.50mm AUDIO JACK	TOLERANCE UNLESS	0.0±0.25	0.±2°		APPROVAL:	杨进宝	DATE:	2023.11.24	DWG. NO.
PART NO.	ZB23023-07FBAP-A	OTHERWISE SPECIFIED:	0.00±0.15 0.000±0.05	0.0±1° 0.00±0.5°		UNIT:	ZB23023-07FBAP-A			SHEET

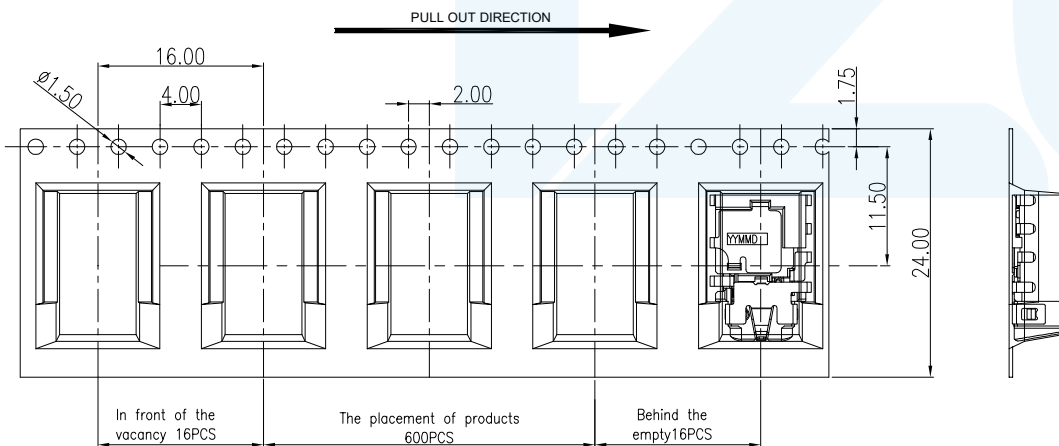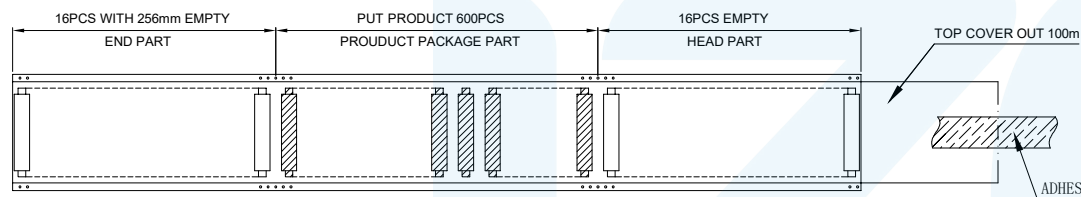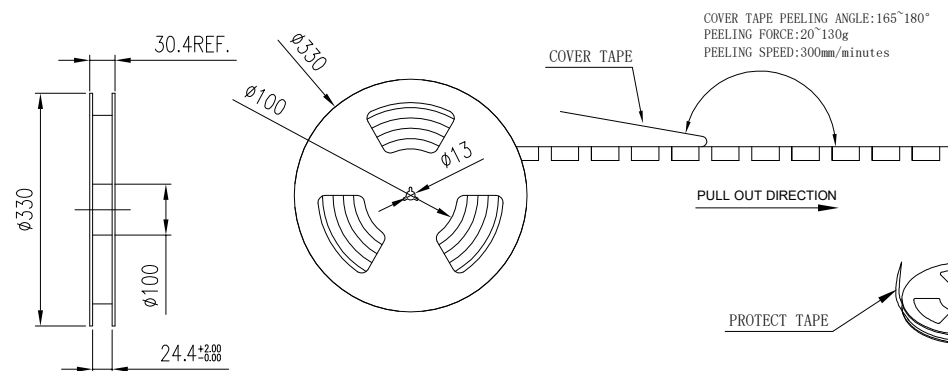






NOTES:

1. Material requirements:

- 1.1 The carton material requirements for the B=B, Dimension is 350*340*310mm;
- 1.2 Reel materials for PET; size reel for 330*30.4.

2. Packaging requirements:

- 2.1 The tape into the packing machine, before the empty 16PCS, after the release of the product 600PCS, then the empty 16PCS with 256mm length of stay;
- 2.2 Top cover should out 100mm of the carrier tape. After winding, using adhesive tape (80~150mm) to stick the leader of cover tap on the side of the carrier tape;
- 2.3 Winding a protect tape around the reel, then stick it by adhesive tape;
- 2.4 Label should paste in the designated area of the reel;
- 2.5 Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
- 2.6 The tired folded 10 disks in the carton total 6000pcs;
- 2.7 Packed finished packing sealing, and in the outer carton label

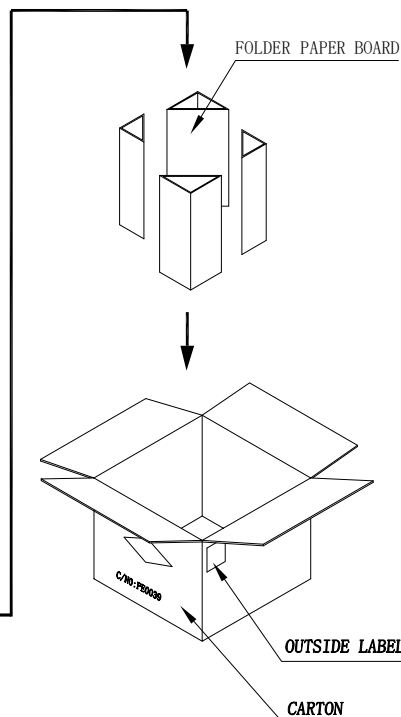

CARTON SIZE

1 CARTON = 10 REEL = 6000 PRODUCT



LZG INDUSTRIAL CO. LTD

PART NAME	ø3.50mm AUDIO JACK	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT:	
PART NO.	ZB23023-07FBAP-A	OTHERWISE SPECIFIED:	0.00±0.15	0.0°±1°	mm	
			0.000±0.05	0.00°±0.5°		

DRAWING:	林生财	DATE:	2023.10.24	SCALE	1:1
CHECK:	李宏鑫	DATE:	2023.10.24	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2023.10.24	DWG. NO.	
DRAWING NO.	ZB23023-07FBAP-A			SHEET	2/2