

1




2

3




4

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

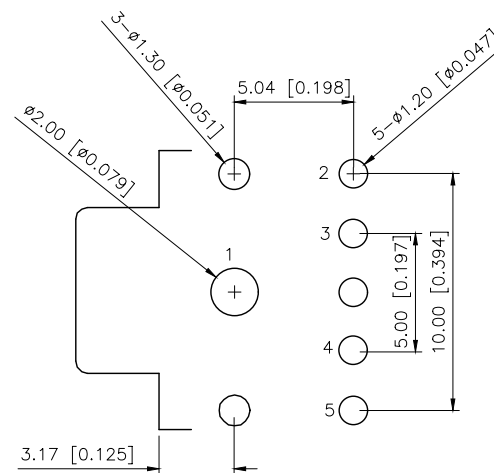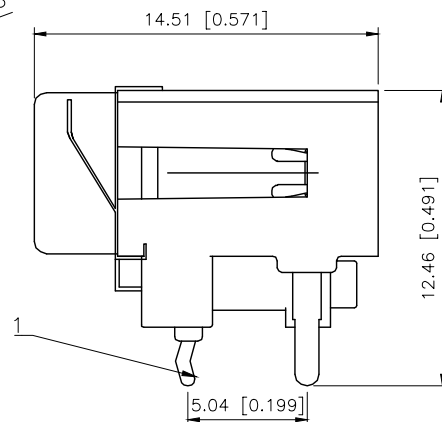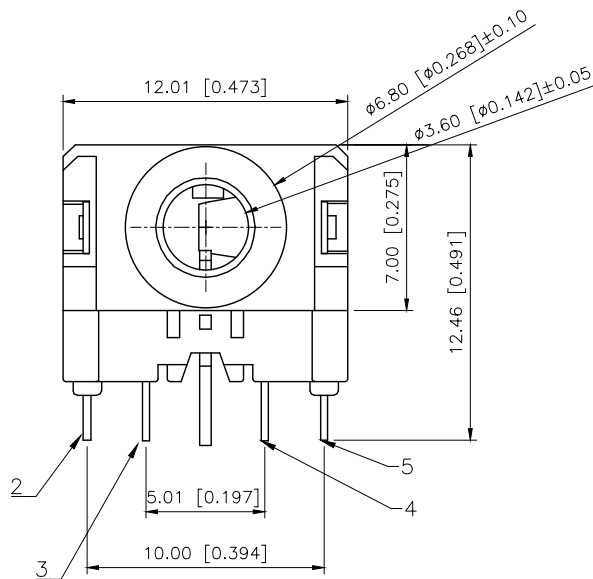

Temperature : -20~70C
Rated Load: DC 30V 0.3A
Contact Resistance : <30mΩ
Insulation Resistance : >100MΩ
Withstand Voltage : AC500V(50Hz)/min
Actuating Force : 2.2~30N
Life : 3000N

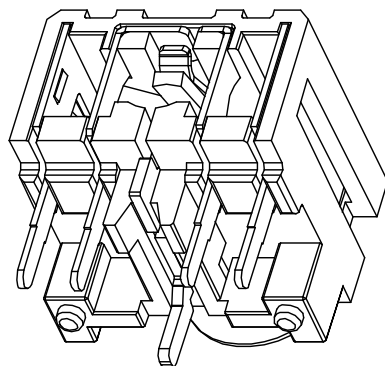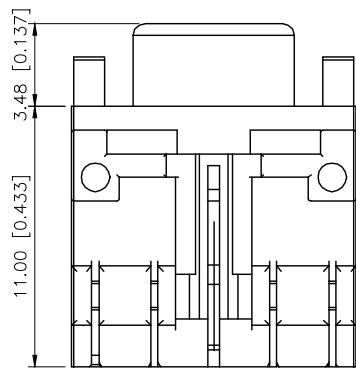

Model No.	PJ-305-X
Schematic	
Color	G:Green R:Red

Plastic	PBT	
Terminal 5	Phosphor Bronze	AG
Terminal 4	Phosphor Bronze	AG
Terminal 3	Phosphor Bronze	AG
Terminal 2	Phosphor Bronze	AG
Terminal 1	Phosphor Bronze	AG
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:

UNIT: mm/in

SIZE: A4

MODEL TYPE:
3.5 PHONE JACKPART NO.:
PJ-305-GDWG NO.:
X-PJ-305-G

SCALE	PAGE	REVISION
N/A	1/1	A1

1

2

3

4