






RoHS
Compliant

ZONE	EC N. NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

NOTE/注释:

1. SPECIFICATION/规格:

- 1.1 Rated current (额定电流): 5.0 A
- 1.2 Voltage rating (额定电压): 5V AC
- 1.3 Contact Resistance (接触阻抗): 40 m Ω Max.
- 1.4 Insulation Resistance (绝缘阻抗): 100M Ω Min.
- 1.5 Withstanding voltage (耐电压): 100 VAC/minute
- 1.6 Mating force (插入力): 5~20N.
- 1.7 Unmating force (拔出力): 8~20N.
- 1.8 Durability Cycle(寿命循环): 10,000 cycle
- 1.9 Operating temperature (工作温度): -40°~+85°

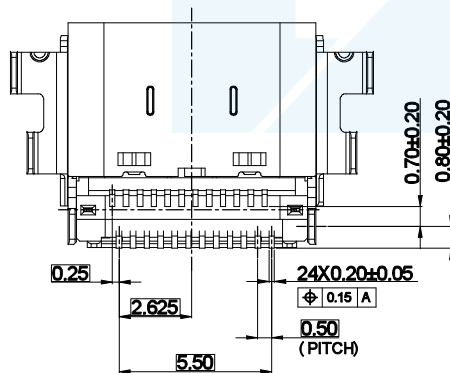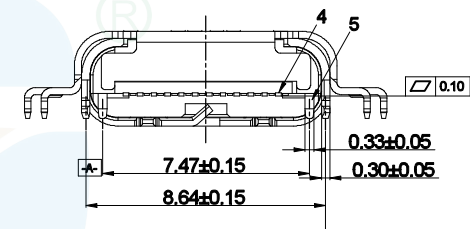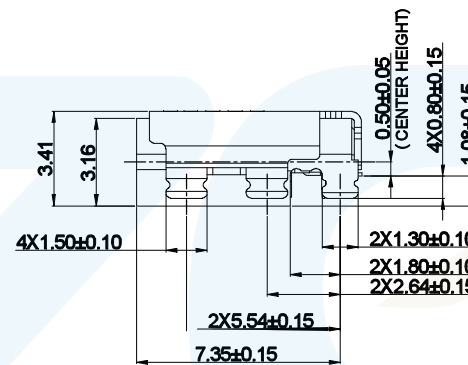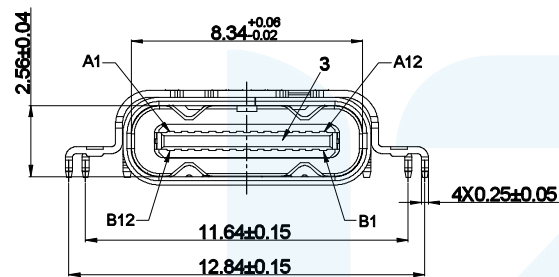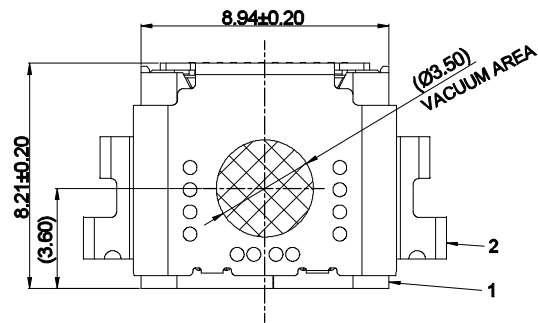

5	MID PLATE	Stainless Steel, T=0.15	NICKEL UNDER PLATED OVER ALL.	1
4	TERMINAL	COPPER ALLOY, T=0.12	MATING SIDE: Gold Plating; SOLDER TAIL: Gold FLASH, 50u" NICKEL OVERALL.	24
3	MAIN HOUSING	HIGH TEMPERATURE	COLOR BLACK UL94V-0	1
2	OUT SHELL	Stainless Steel, T=0.25	NICKEL UNDER PLATED OVER ALL.	1
1	MAIN SHELL	Stainless Steel, T=0.30	NICKEL UNDER PLATED OVER ALL.	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

LZG

LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE:	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL:	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.:	
DRAWING NO.:	ZB48057-24SBAP-A			SHEET:	1/2

PART NAME	TYPE C 24 PIN	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT:	
PART NO.	ZB48057-24SBAP-A	OTHERWISE SPECIFIED:	0.00±0.20 0.000±0.15	0.0°±1° 0.00°±0.5°	mm	

RoHS Compliant		F		E		D		C		B		A	
ZONE		E C N . N O .		DESCRIPTION		DRAWING		DATE					
A				INITIAL		林生财		2020.02.18					


Technical drawing of a Type C 24 Pin connector. The drawing shows a top view of the component with various dimensions and tolerances. Key features include a central pin array, side pins, and mounting tabs. Dimensions are given in millimeters with tolerances. Callouts include A1, B12, A12, B1, and various radii (R0.28, R0.48, R0.20, R0.60). A large 'LZG' watermark is visible in the background.

LZG [®] LZG INDUSTRIAL CO. LTD		DRAWING: 林生财		DATE: 2020.02.18		SCALE: 1:1	
PART NAME: TYPE C 24 PIN		CHECK: 李宏鑫		DATE: 2020.02.18		MATERIAL: *	
PART NO. ZB48057-24SBAP-A		APPROVAL: 杨进宝		DATE: 2020.02.18		DWG. NO.	
		DRAWING NO. ZB48057-24SBAP-A		SHEET		2/2	

RoHS Compliant		F		E		D		C		B		A	
ZONE		E C N . N O .		DESCRIPTION		DRAWING		DATE					
A				INITIAL		林生财		2020.02.18					

Technical drawing of a Type C 24 Pin connector. The drawing shows a top view of the component with various dimensions and tolerances. Key features include a central pin array, side pins, and mounting tabs. Dimensions are given in millimeters with tolerances. Callouts include A1, B12, A12, B1, and various radii (R0.28, R0.48, R0.20, R0.60). A large 'LZG' watermark is visible in the background.

LZG [®] LZG INDUSTRIAL CO. LTD		DRAWING: 林生财		DATE: 2020.02.18		SCALE: 1:1	
PART NAME: TYPE C 24 PIN		CHECK: 李宏鑫		DATE: 2020.02.18		MATERIAL: *	
PART NO. ZB48057-24SBAP-A		APPROVAL: 杨进宝		DATE: 2020.02.18		DWG. NO.	
		DRAWING NO. ZB48057-24SBAP-A		SHEET		2/2	

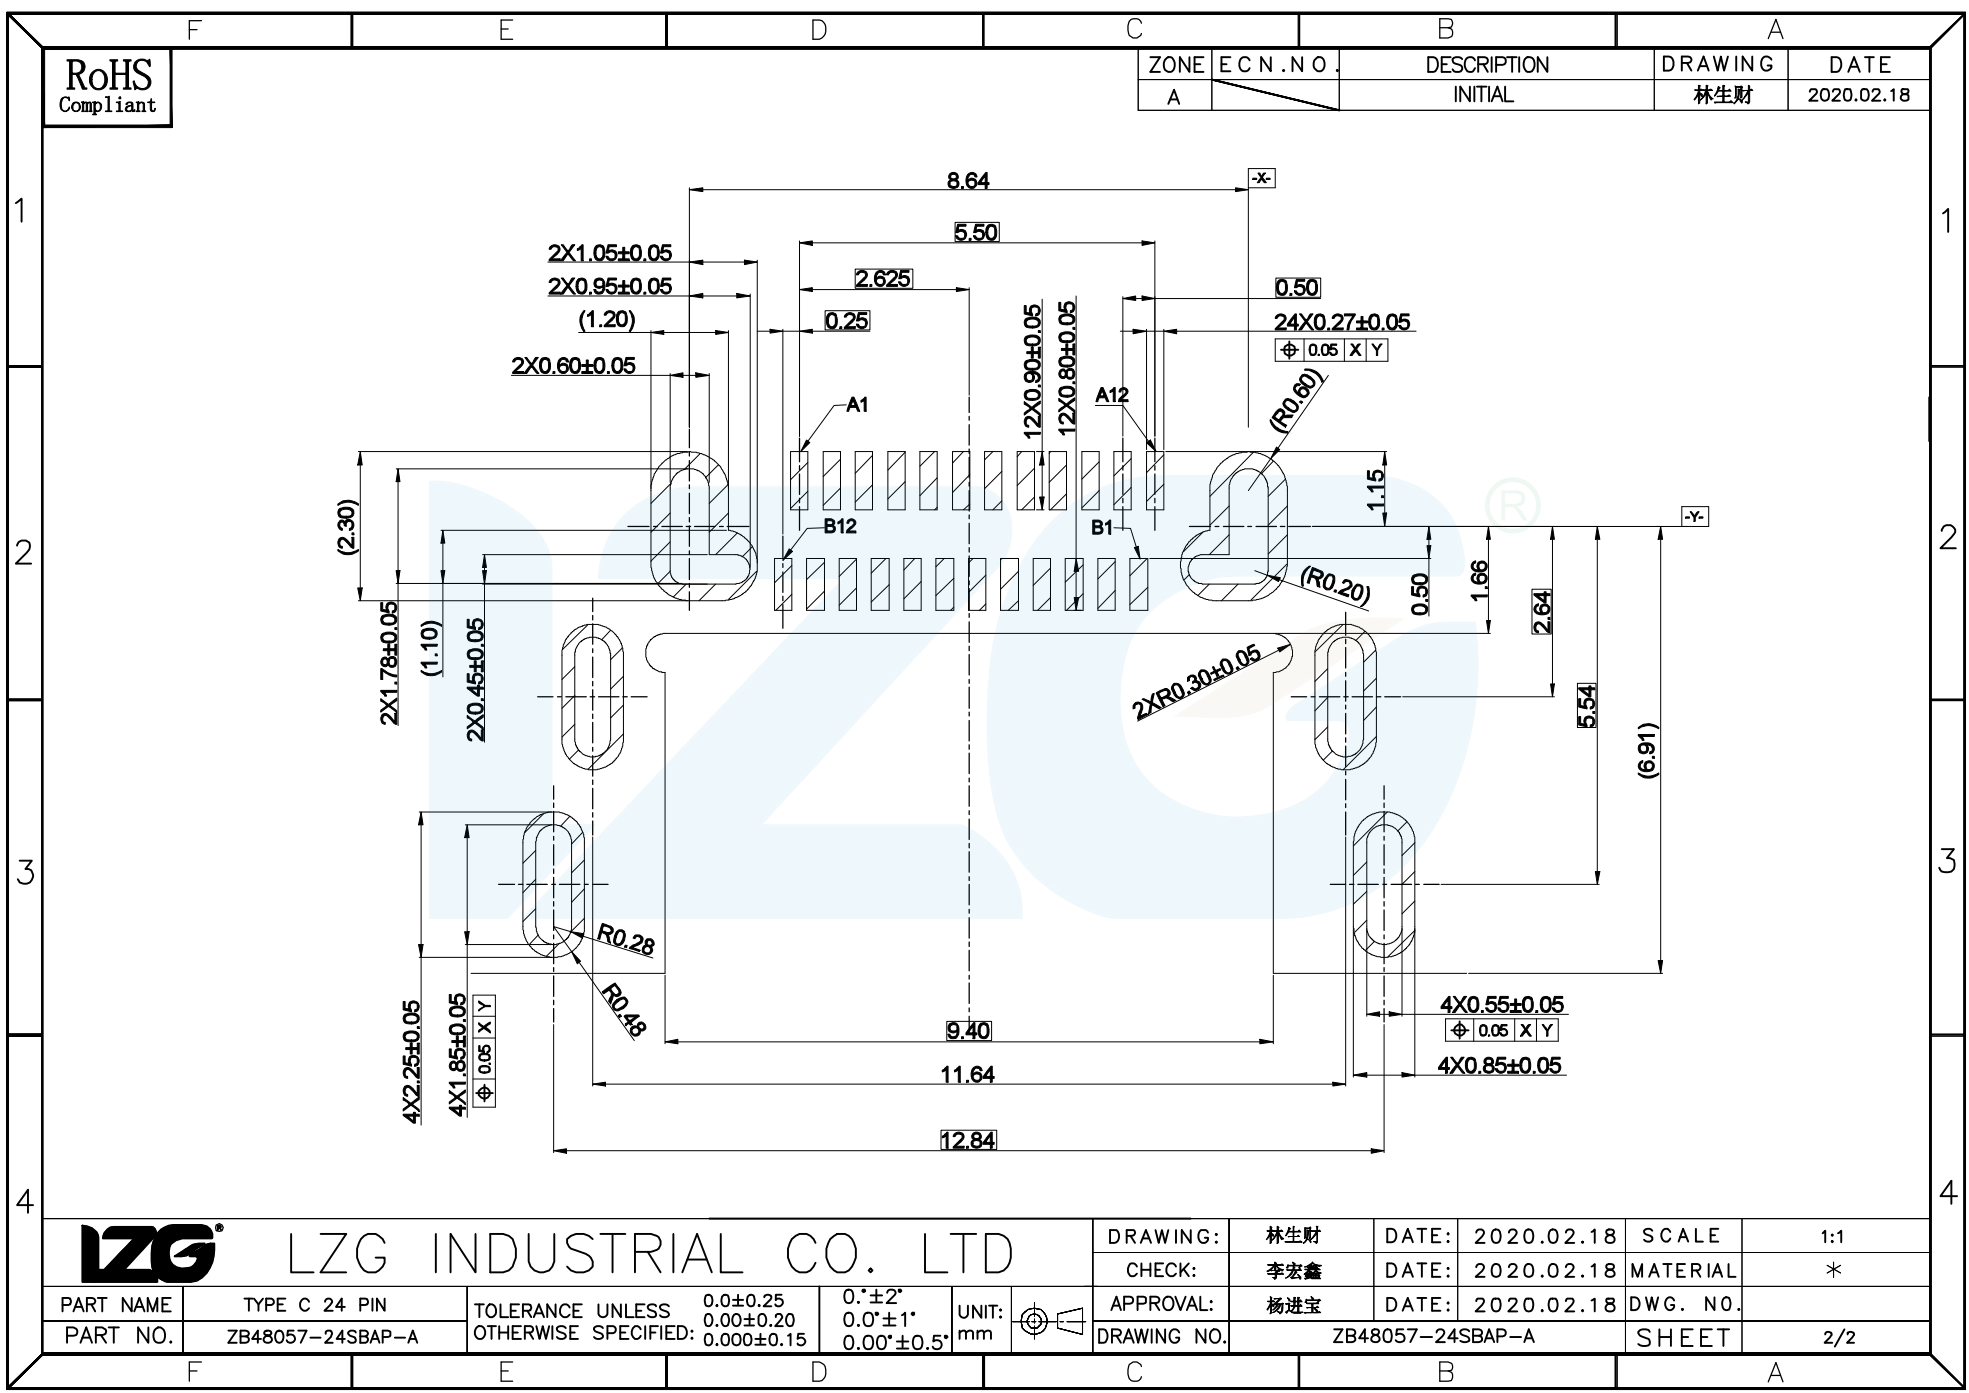

RoHS Compliant		F		E		D		C		B		A	
ZONE		E C N . N O .		DESCRIPTION		DRAWING		DATE					
A				INITIAL		林生财		2020.02.18					

LZG [®] LZG INDUSTRIAL CO. LTD		DRAWING: 林生财		DATE: 2020.02.18		SCALE: 1:1	
CHECK: 李宏鑫		DATE: 2020.02.18		MATERIAL: *			
APPROVAL: 杨进宝		DATE: 2020.02.18		DWG. NO.			
DRAWING NO. ZB48057-24SBAP-A		SHEET		2/2			

PART NAME	TYPE C 24 PIN	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT: mm	
PART NO.	ZB48057-24SBAP-A	OTHERWISE SPECIFIED:	0.00±0.20 0.000±0.15	0.0°±1° 0.00°±0.5°		

RoHS Compliant		F		E		D		C		B		A	
ZONE		E C N . N O .		DESCRIPTION		DRAWING		DATE					
A				INITIAL		林生财		2020.02.18					

LZG [®] LZG INDUSTRIAL CO. LTD		DRAWING: 林生财		DATE: 2020.02.18		SCALE: 1:1	
CHECK: 李宏鑫		DATE: 2020.02.18		MATERIAL: *			
APPROVAL: 杨进宝		DATE: 2020.02.18		DWG. NO.			
DRAWING NO. ZB48057-24SBAP-A		SHEET		2/2			

PART NAME	TYPE C 24 PIN	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT: mm	
PART NO.	ZB48057-24SBAP-A	OTHERWISE SPECIFIED:	0.00±0.20 0.000±0.15	0.0°±1° 0.00°±0.5°		

RoHS Compliant		F		E		D		C		B		A	
ZONE		E C N . N O .		DESCRIPTION		DRAWING		DATE					
A				INITIAL		林生财		2020.02.18					

LZG [®] LZG INDUSTRIAL CO. LTD		DRAWING: 林生财		DATE: 2020.02.18		SCALE: 1:1	
CHECK: 李宏鑫		DATE: 2020.02.18		MATERIAL: *			
APPROVAL: 杨进宝		DATE: 2020.02.18		DWG. NO.			
DRAWING NO. ZB48057-24SBAP-A		SHEET		2/2			

PART NAME	TYPE C 24 PIN	TOLERANCE UNLESS	0.0±0.25	0.°±2°	UNIT: mm	
PART NO.	ZB48057-24SBAP-A	OTHERWISE SPECIFIED:	0.00±0.20 0.000±0.15	0.0°±1° 0.00°±0.5°		


RoHS Compliant		F		E		D		C		B		A	
ZONE		E C N . N O .		DESCRIPTION		DRAWING		DATE					
A				INITIAL		林生财		2020.02.18					

Technical drawing of a Type C 24 Pin connector. The drawing shows a top view of the component with various dimensions and tolerances. Key features include a central pin array, side pins, and mounting tabs. Dimensions are given in millimeters with tolerances. A large 'LZG' watermark is visible in the background.




LZG [®] LZG INDUSTRIAL CO. LTD		DRAWING: 林生财		DATE: 2020.02.18		SCALE: 1:1	
PART NAME: TYPE C 24 PIN		CHECK: 李宏鑫		DATE: 2020.02.18		MATERIAL: *	
PART NO. ZB48057-24SBAP-A		APPROVAL: 杨进宝		DATE: 2020.02.18		DWG. NO.	
		DRAWING NO. ZB48057-24SBAP-A		SHEET		2/2	

RoHS
Compliant

ZONE	EC N. NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

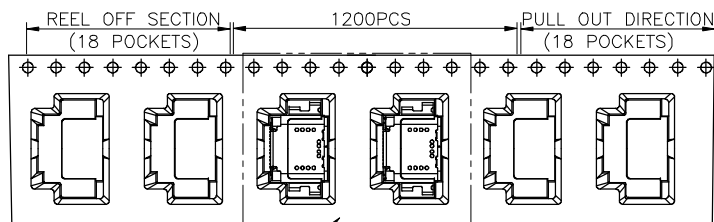

SEE DETAIL X

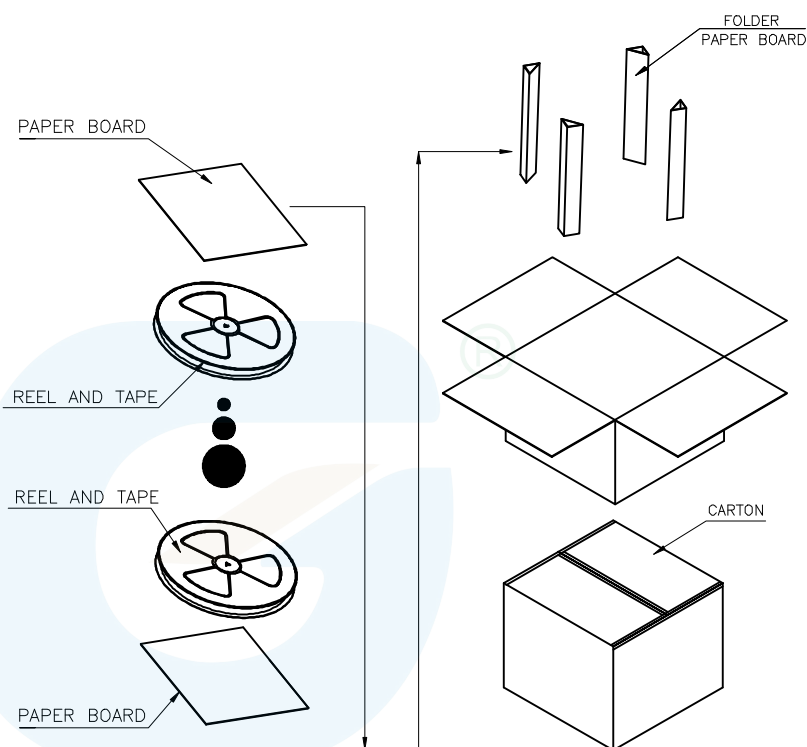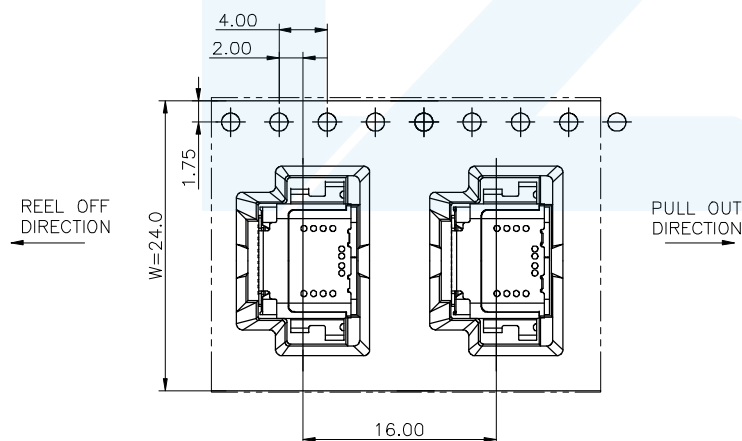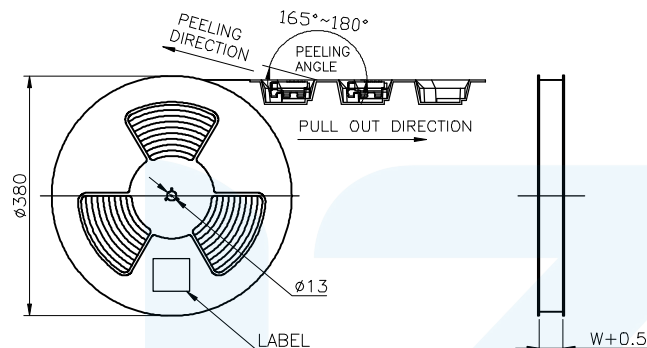

	REEL	CARTON
CONNECTOR (PCS)	1200	12000

LZG

LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB48057 Packing drawing			SHEET	1/1

PART NAME	TYPE C 24 PIN	TOLERANCE-UNLESS	0.0±0.25	0.°±2°	UNIT:	
PART NO.	ZB48057-24SBAP-A	OTHERWISE SPECIFIED:	0.00±0.20	0.0°±1°	mm	
			0.000±0.15	0.00°±0.5°		