

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS




P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	01APR2015	DW	CW
	B	ECR-15-014907	14OCT2015	DL	CW
	BI	ECR-19-012251	04SEP2019	WQR	CW

NOTES:



- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40-+125^{\circ}C$
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X10XX000)

注释:


- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40-+125^{\circ}C$
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

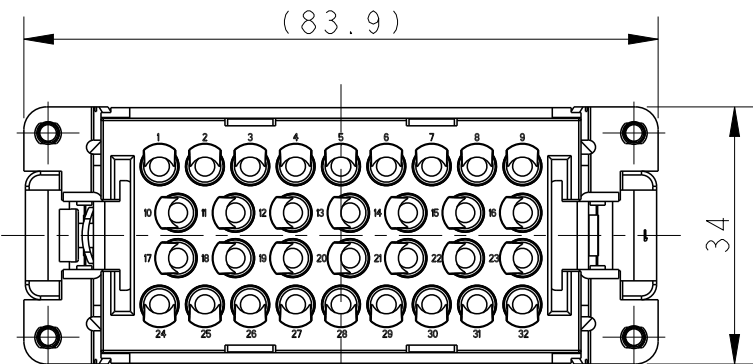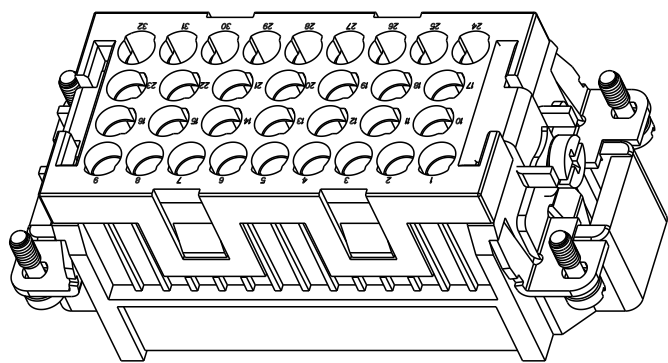

M4 THREAD RECOMMENDED
TIGHTENING TORQUE 1.2Nm

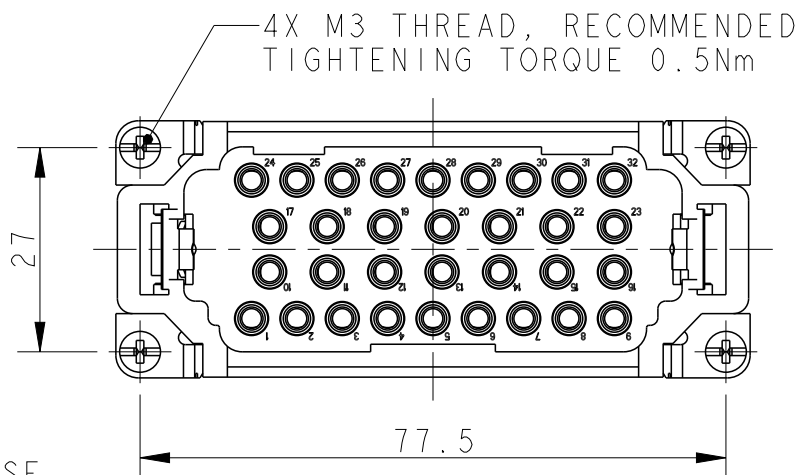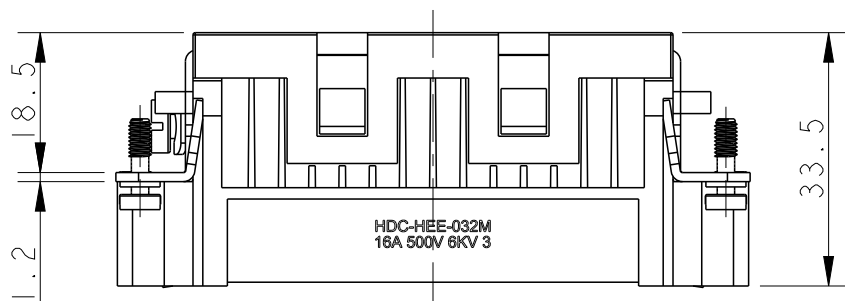


PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

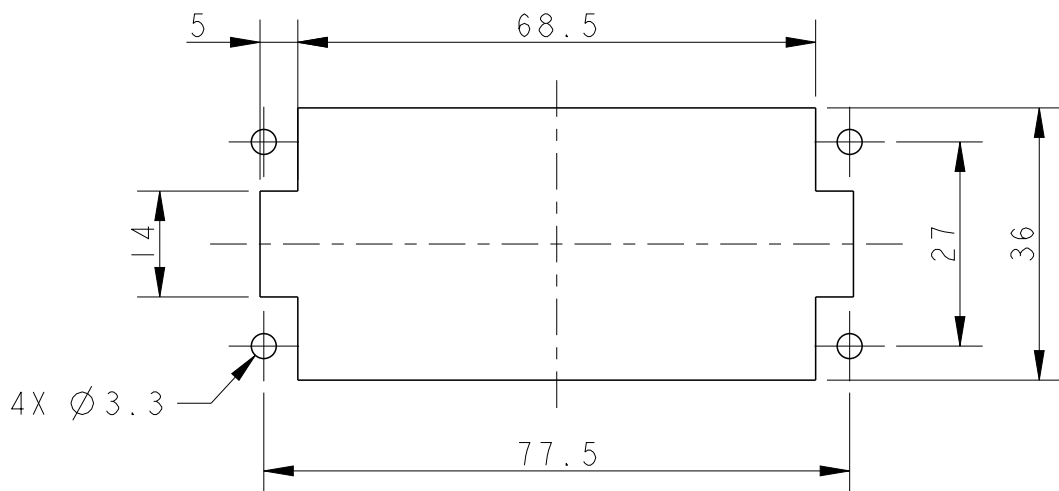

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

FINISH

DWN

David Wang

CHK

Chris Wang

APVD

Xiang Xu

PRODUCT SPEC

108-106137

APPLICATION SPEC

114-106137

WEIGHT

-

Customer Drawing

T2059322101-000

PART NUMBER

料号

HEE-032 MALE INSERT, NO TE LOGO
HEE-032公插, 无TE LOGO

PART DESCRIPTION

描述



TE Connectivity

NAME

HEE-032 MALE INSERT, NO TE LOGO

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

G-T2059322101000

SCALE

1:1

SHEET

OF

REV

BI

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T2059322101-000](#)