

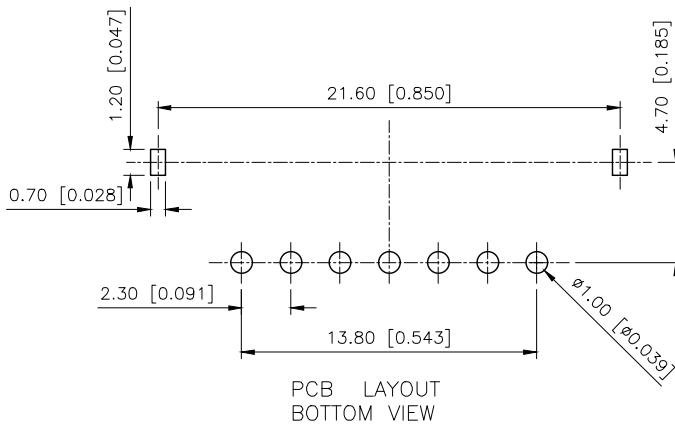


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A			2025.06.17	
A2	ECN-P-2025120101	A2X1		2025.12.01	

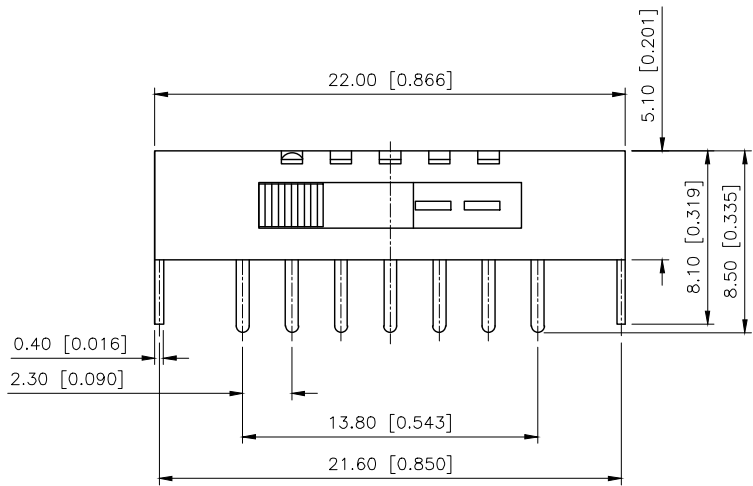

SS15E01L6



L(mm)
2~10



SCHEMATIC

RATING	0.3A 50V DC
CIRCUIT	1P7T
INSULATION RESISTANCE	30MΩ Min
CONTACT RESISTANCE	100MΩ MAX
TRAVEL	2.30MM
OPERATING FORCE	250±100gf
OPERATING LIFE	10000

7	Spring	1	Steel wire	NATURAL
6	Steel ball	1	Steel	NATURAL
5	Contact	1	PBS strip	AG clad
4	Terminal	7	Brass strip	AG Plated
3	Base	1	Phenolic resin	NATURAL
2	Frame	1	Steel strip	Ni Plated
1	Knob	1	NYLON	Black
NO	NAME	QTY	MATERIAL	Remark

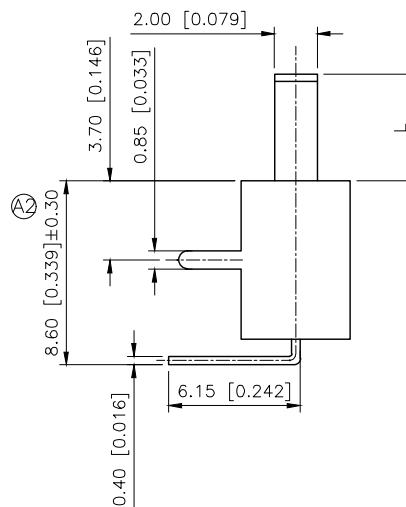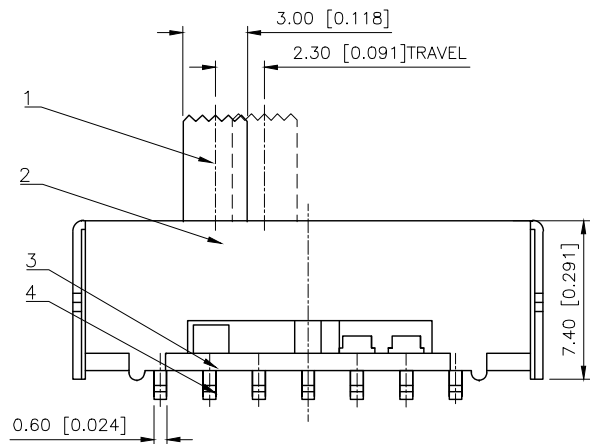

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN		VIEW:	MODEL TYPE: SLIDE SWITCH
CHECKED		UNIT: mm/in	PART NO.: SS15E01L6
APPROVED		SIZE: A4	DWG NO.: