



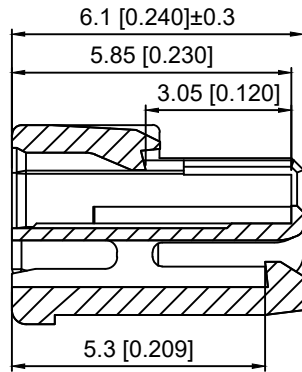

SEC:A-A



Specifications:

规格:

Voltage rating:50V AC/DC

额定电压: 50V AC/DC

Current rating:1.5A AC/DC

额定电流: 1.5A AC/DC

Withstand voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃-+125℃



温度范围: -40℃-+125℃

Insulation resistance:100MΩ min

绝缘电阻: 100MΩ Min

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max

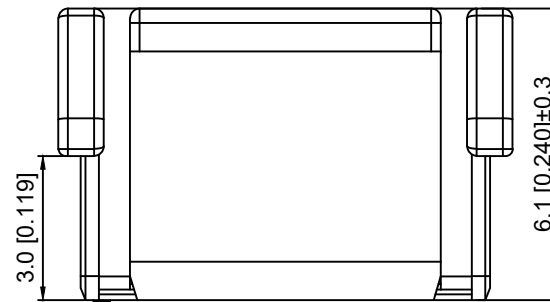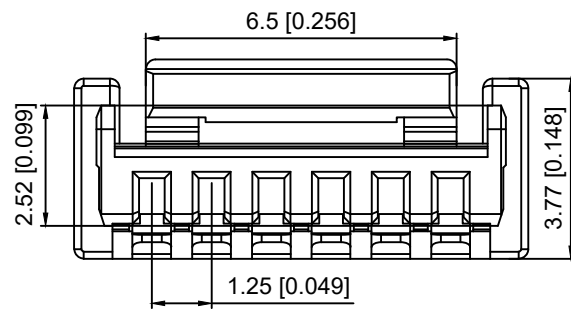

X1256 H - XX L - N0 X
① ② ③ ④ ⑤ ⑥

1.Series No



2.Category:H-Housing

3.Row No.Pin No:XX-02~16 Pin

4.Special No:L-Front buckle

5.Material:N0-PA66 UL94V-0

6.Color:Blank-Black ; W-White

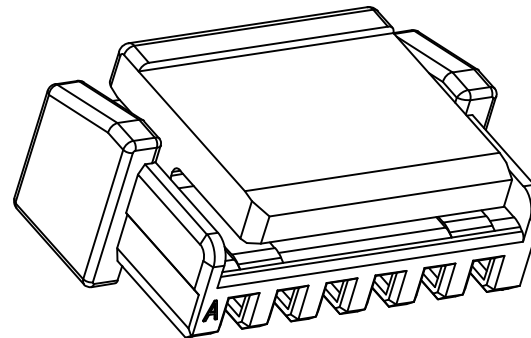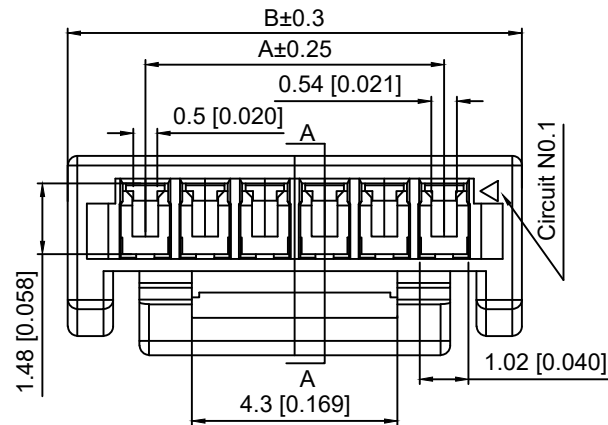

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	1.25	4.50	10	11.25	14.50
03	2.54	5.75	11	12.50	15.75
04	3.75	7.00	12	13.75	17.00
05	5.00	8.25	13	15.00	18.25
06	6.25	9.50	14	16.25	19.50
07	7.50	10.75	16	17.50	19.75
08	8.75	12.00	16	18.75	21.00
09	10.00	13.25	/		

X1256H-XXL-N0X	PA66	X1256W-L	X1256T-L
PART N0	Material	Suitable XKB Wafer	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	1.25mm Crimp Style Connector
CHKD		UNIT: mm/in	PART NO.: X1256H-XXL-N0X
APPD		SIZE: A4	DWG NO.: X-X1256H-XXL-N0X

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

ΔX	ΔX	ΔX	MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGLAR	±5°
								L≤ 4	±0.2
								4<L≤ 16	±0.3
								16<L≤ 63	±0.4
								L> 63	±0.5
REVISIONS								UNSPECIFIED TOLERANCES	

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

WEIGHT	SHEET	REVISION
	1/1	A0