
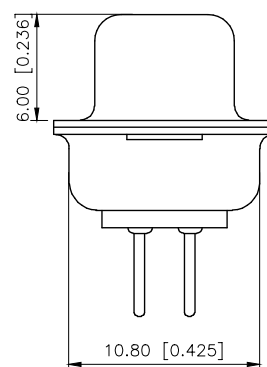
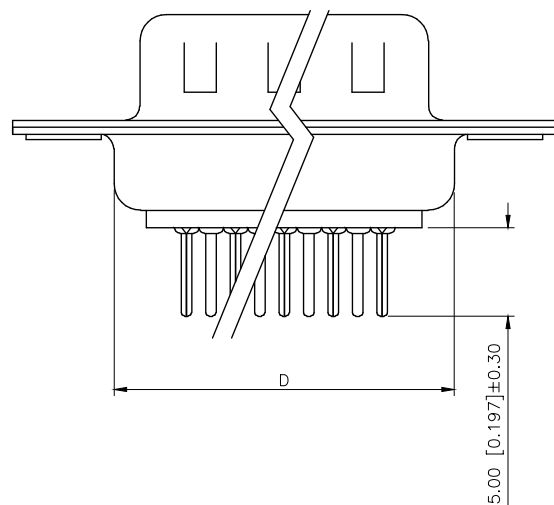
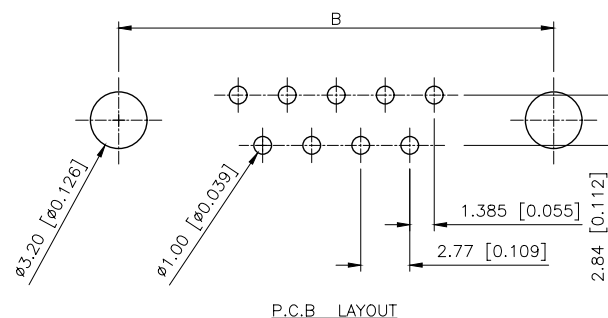


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.22	阿树

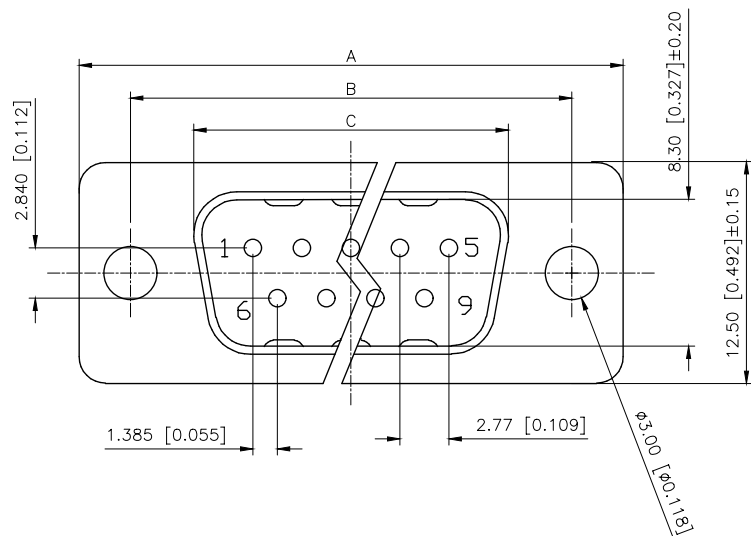

Specifications:

规格:





- 1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
- 2.Current rating:3A(T) / 5A(C) AC/DC
额定电流: 3A(T) / 5A(C) AC/DC
- 3.Withstanding voltage:500V AC/minute
耐受电压: ≥500V AC/分钟
- 4.Temperature range: -55℃+105℃
温度范围: -55℃+105℃
- 5.Insulation resistance:1000MΩMIN
绝缘电阻: ≥1000MΩ
- 6.Contact resistance:30mΩMax
接触电阻: ≥30mΩ
- Material:
材料:
- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
- 8.The iron shell:SPCC Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC,镀镍/镀锡/镀金
- B、成品不能有弯针, R角不一致等不良。

PART NO.:

X02 09 W T 7 BL 5
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series NO.
②Row No.Pin No.XX-09;15;25;37
③Welding Board Angle :W-Male
④1: Traditional C: Car-pin
⑤Planting Category: 1:1U 2:2U 3:3U 4:5U 5:15U 6:30U
⑥Color:B-BLACK W-White BL-Blue
⑦1:TYPE-1; 2:TYPE-2; 5:TYPE-5; 7:TYPE-7

NUMBER OF POSITIONS	DIMENSION			
	A $\pm$ 0.25	B $\pm$ 0.13	C $\pm$ 0.38	D $\pm$ 0.13
9	30.80	24.99	18.00	19.20
15	39.20	33.32	26.50	27.50
25	53.05	47.04	40.00	41.20
37	69.40	63.50	56.60	57.20

铆合方式	TYPE-1:铆合	TYPE-2:前铆实心螺母	TYPE-7:后铆鱼叉	TYPE-5:铆鱼叉锁螺丝	
图示					
DESIGN	阿树	VIEW: 	MODEL TYPE: D-SUB		
CHECKED		UNIT: mm/in	PART NO.: X0209WT7BL5		
APPROVED		SIZE: A4	DWG NO.: X-X0209WT7BL5		
CISION CO.,LIMITED			SCALE N/A	PAGE 1/1	REVISION A1

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XKLB 星城 Connection

XKB INDUSTRIAL PRECISION CO.,LIMITED