
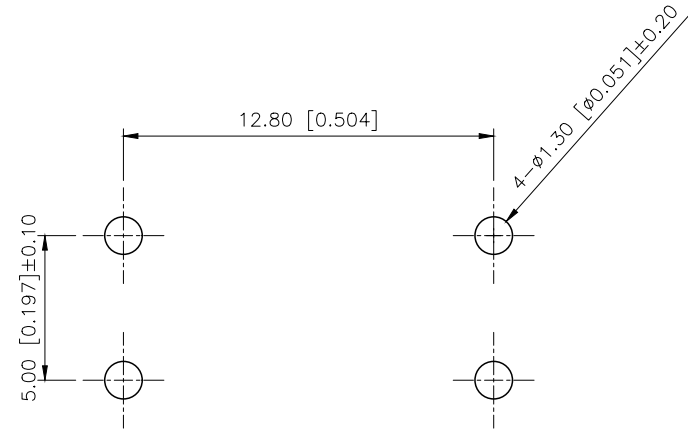
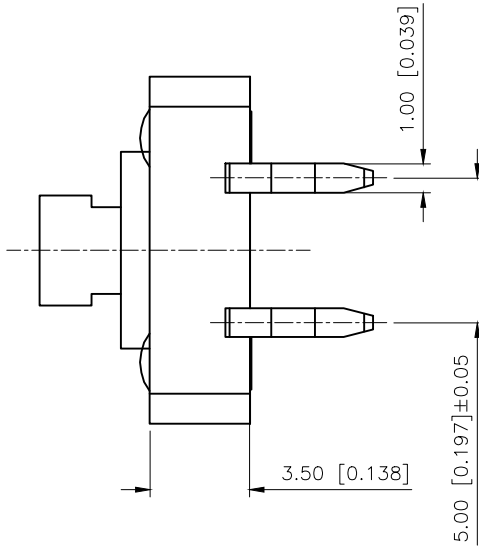



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	①X2	产品尺寸变更，图面升级整理图面	2025.10.18	阿树

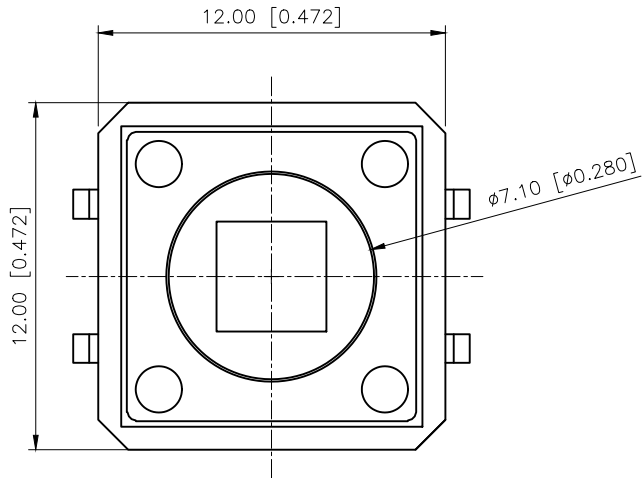


PCB LAYOUT

- Specifications(规格):
- 1.Voltage rating(额定电压):DC 12V
 - 2.Current rating(额定电流):0.5A AC/DC
 - 3.Withstanding voltage(耐压值):≥250V AC/minute
 - 4.Insulation resistance(绝缘电阻):≥100MΩ Min
 - 5.Contact resistance(接触电阻):≤30mΩ Max
 - 6.Mating cycles (使用寿命): 50000 cycles Min
 - 7.Travel (行程): 0.35±0.10mm
 - 8.Temperature range(使用温度):-25℃~+70℃

PAPT NO	TC-1103T-B-B
Operating Force	B:160gf C:260gf
color	B:Black Y: Yellow



CIRCUIT DIAGRAM

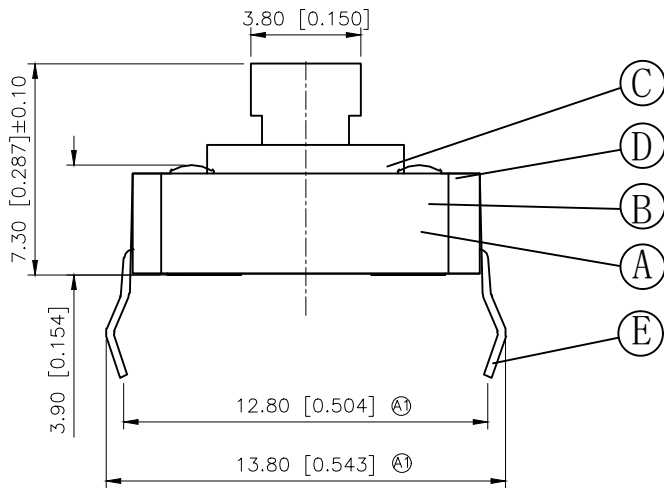

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	TACT SWITCH
APPROVED		SIZE: A4	PART NO.: TC-1103T-B-B
			DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1