
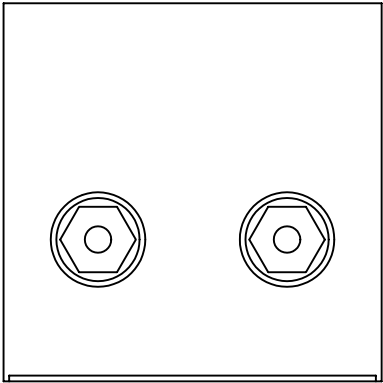
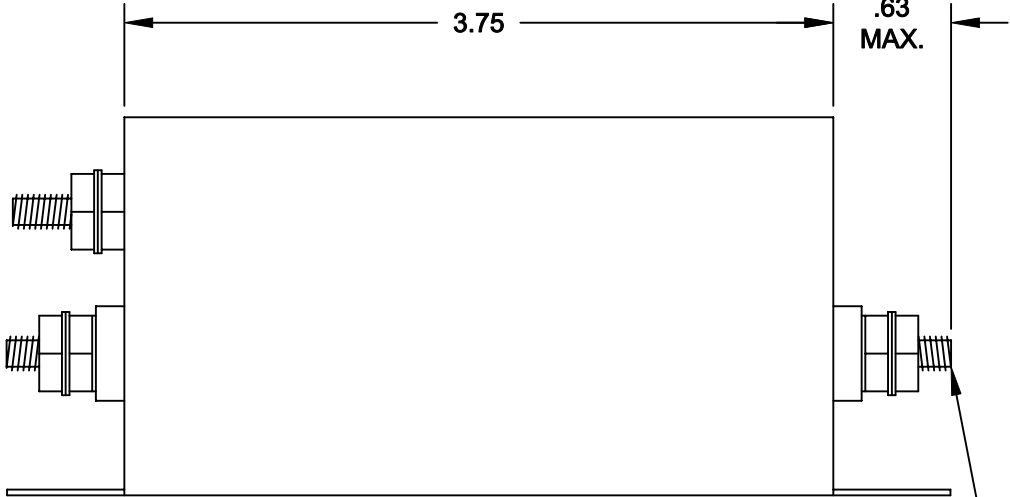
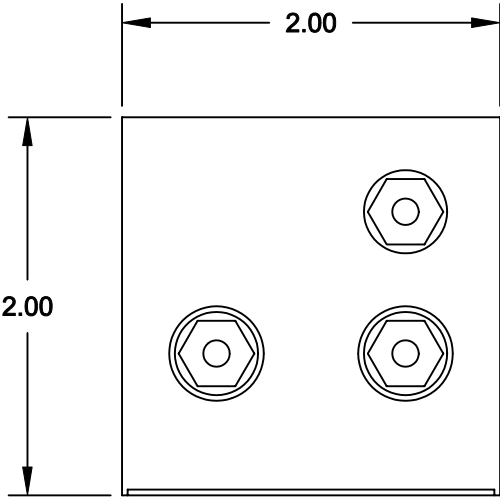


SPECIFICATIONS


- 1. CASE:
22 GA. (.030) CRS, TIN PLATED
- 2. RATED CURRENT:
30A
- 3. RATED VOLTAGE:
60VDC
- 4. TEST VOLTAGE:
LINE TO GROUND: 150VDC

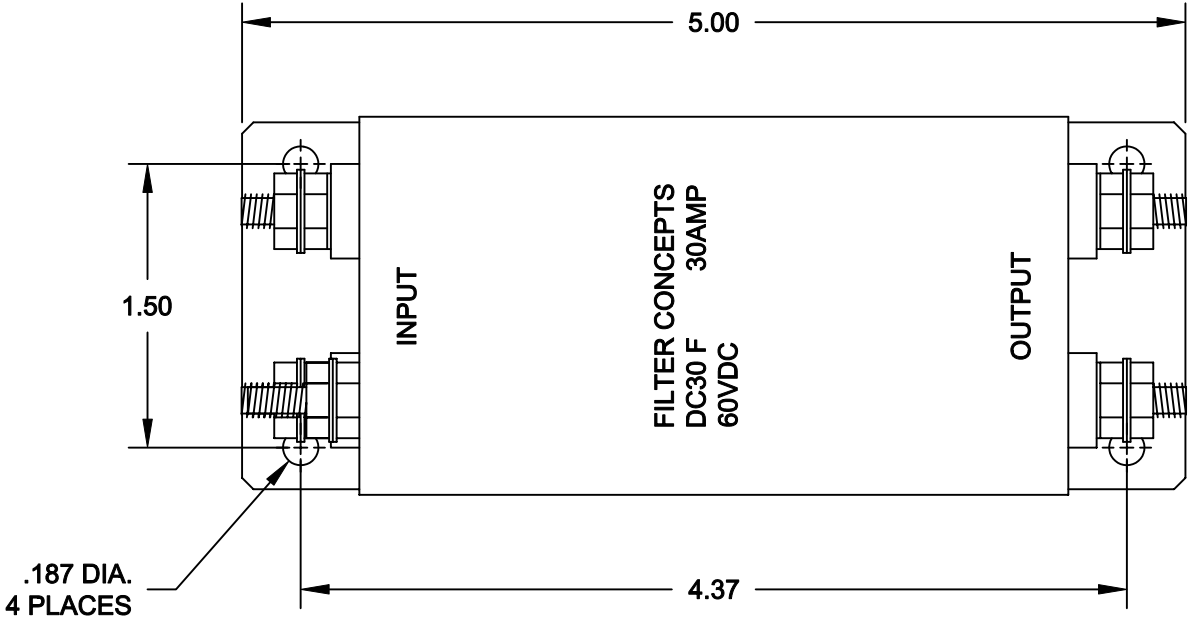

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/G	43 db	60 db	60 db	60 db	60 db	55 db

SCHEMATIC

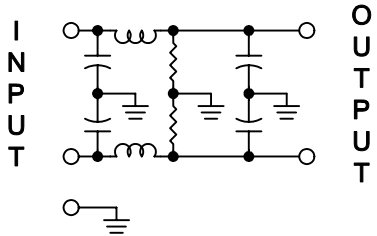

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ±.030 ±
XXX ±.010

MATERIAL

FINISH

CONTRACT NO.

APPROVALS

DATE

DRAWN

GIANG TRINH

06-13-02

CHECKED

DANNIEL VUONG

08-05-02

SIZE

B

CODE IDENT NO.

DRAWING NO.

7347

SCALE

1/1

SHEET

1

OF

1

NEXT ASSY

USED ON

APPLICATION

7347

7347

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Astrodyne TDI:](#)

[DC30 F](#)