

标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

Materials and Electroplating

- ①. Plastic body: PA66
- ②. Clip: Copper, nickel plated
- ③. Square box: Copper, nickel plated
- ④. Plastic cover plate: PA66
- ⑤. Screw: M2.0, iron, galvanized, straight groove

Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min

Using wire diameter: 28-16AWG 1.5mm²





mechanical properties

Temperature range: -40 °C~+105 °C

Instantaneous temperature: +250 °C for 5 econds

Torque: 0.2Nm (1.77Lbin)

Stripping length: 6-7mm

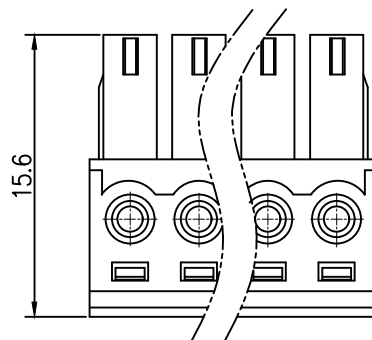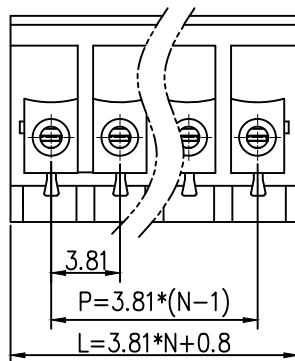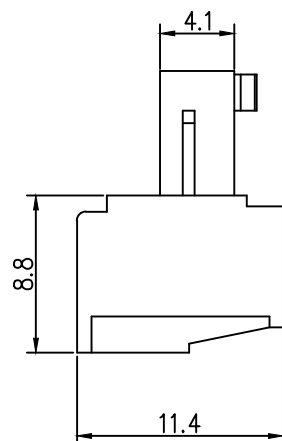

2	方盒	铜	镀镍	
1	底座	PA66	绿色	
序号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE		接线端子																								
			料 号 PART NO		HC-JXDZK-3.81-9P																								
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 列 SCALE	1:1																									
<table border="1"><thead><tr><th colspan="3">公差参数</th></tr><tr><th>Dim</th><th>DimL</th><th></th></tr></thead><tbody><tr><td>2-6P</td><td>±0.10</td><td>±0.20</td><td rowspan="2">X. X</td><td rowspan="2">±0.35</td></tr><tr><td>7-12P</td><td>±0.20</td><td>±0.30</td></tr><tr><td>13-18P</td><td>±0.25</td><td>±0.40</td><td rowspan="2">X. XX</td><td rowspan="2">±0.25</td></tr><tr><td>19-24P</td><td>±0.30</td><td>±0.50</td></tr></tbody></table>			公差参数			Dim	DimL		2-6P	±0.10	±0.20	X. X	±0.35	7-12P	±0.20	±0.30	13-18P	±0.25	±0.40	X. XX	±0.25	19-24P	±0.30	±0.50	单 位 UNIT	MM	制 图 DRAW	AhYe	
			公差参数																										
			Dim	DimL																									
			2-6P	±0.10	±0.20	X. X	±0.35																						
7-12P	±0.20	±0.30																											
13-18P	±0.25	±0.40	X. XX	±0.25																									
19-24P	±0.30	±0.50																											
张 数 PART NO		1 OF 1	审 核 CHECKED	夏操云																									
版 本 REV		A	批 准 APPROVE	赵亮亮																									